

Features


- Acrylic
- Oval shape
- Drop-in
- Pump with air switch and grounding-type plug-in cord
- Optional K-1491 removable bath pillow
- Custom pump options
- Optional K-9698 whirlpool trim kit in various finishes
- 8 individually adjustable ProFlex® hydro-massage jets
- Textured bottom surface
- 60" (1524 mm) x 42-1/4" (1073 mm) x 21" (533 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASME A112.19.7
- UL 1795
- ASTM E162
- ASTM E662

5' CUSTOM BATH WHIRLPOOL K-1337-CN

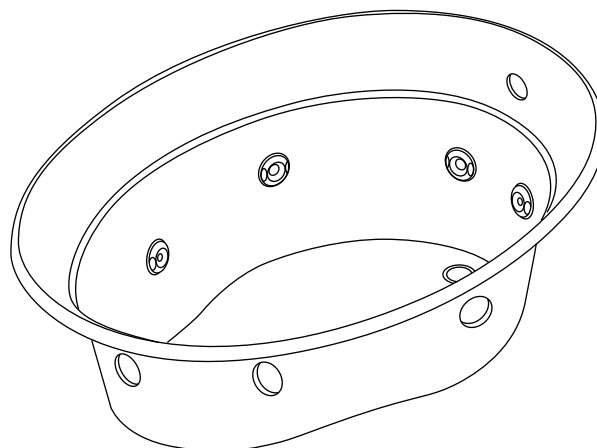

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes			
K-1337-CN	5' custom bath whirlpool – drop-in	☐ 0	☐ Other_____		
Recommended Accessories					
K-7166-AF	Adjustable pop-up drain	☐ CP	☐ PB	☐ Other_____	
Optional Accessories					
K-1491	Pillow	☐ 0			☐ Other_____
K-9698	Flexjet trim kit (metal finishes)		☐ CP	☐ PB	☐ Other_____

Product Specification

The acrylic bath whirlpool shall be 60" (1524 mm) in length, 42-1/4" (1073 mm) in width, and 21" (533 mm) in height. Bath whirlpool shall be oval shaped for drop-in installation. Bath whirlpool shall have 8 individually adjustable ProFlex® hydro-massage jets, and a pump with air switch and grounding-type plug-in cord. Bath whirlpool shall have custom pump options and a textured bottom surface. Bath whirlpool shall be UL listed. Bath whirlpool shall have an optional K-9698 jet trim kit and an optional K-1491 removable pillow. Bath whirlpool shall be Kohler Model K-1337-CN-_____.

SERIF®

Technical Information

Fixture*:	
Basin area:	
Bathing well	42" (1067 mm) x 28" (711 mm)
Top area	55" (1397 mm) x 40" (1016 mm)
Weight	110 lbs (49.9 kg)
To overflow:	
Water depth	15-1/2" (394 mm)
Capacity	73 gal (276.3 L)
* Approximate measurements for comparison only.	

Included components:	
Cut-out template	1017044-7

Pump:	V	Hz	A
1-speed	120	60	7.5

Minimum access panel (required):	
Pump/control	20" (508 mm) W x 15" (381 mm) H


Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.	


Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 42 lbs/square foot (206 kg/square meter) loading.

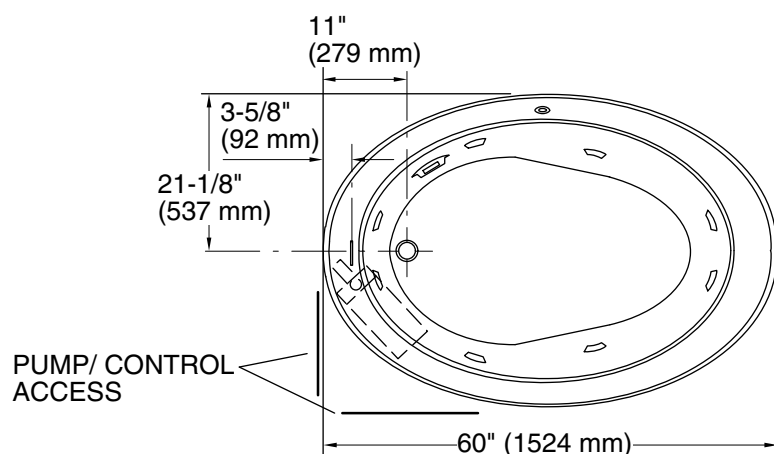

No change in measurements if connected with drain illustrated (K-7166-AF)

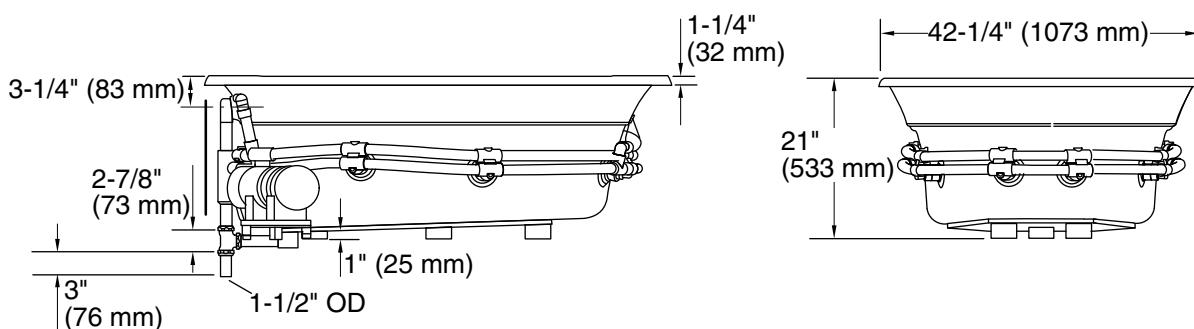

Product Diagram