

### Features


- Cast iron with Safeguard® finish
- UL listed
- Less all trim
- Drilled for required grip rails
- 6 Flexjets
- N1 models - variable speed pump with 1.5 kW heater
- H2 models - variable speed pump with 1.5 kW heater
- 60" (152.4 cm) x 36" (91.4 cm) x 20-3/8" (51.8 cm)

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.1/CSA B45.2
- ASME A112.19.7M
- UL 1795

### BATH WHIRLPOOL K-792-H2 ALSO K-792-N1

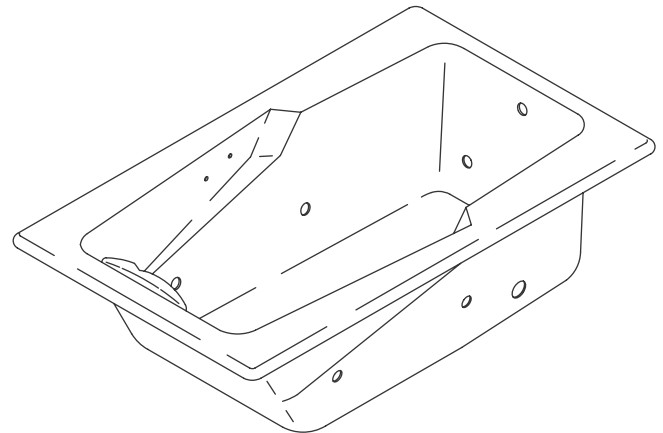

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-792-H2	Bath whirlpool	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-792-N1	Bath whirlpool with neckjets and pillow (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

#### Required Accessories

K-9623	Grip rails (pair)	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-9696	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

#### Recommended Accessories

K-7161-AF	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
-----------	-------	-----------------------------	-----------------------------	-------------------------------------

### Product Specification

The bath whirlpool shall be 60" (152.4 cm) in length, 36" (91.4 cm) in width, and 20-3/8" (51.8 cm) in height. Product shall be made of cast iron with Safeguard finish. K-792-N1 bath whirlpool shall have 6 Flexjets, a variable speed pump with 1.5 kW heater, and back-lit user control. and pulsating neckjets with pillow. K-792-H2 bath whirlpool shall have 6 Flexjets, a variable speed pump with 1.5 kW heater, and back-lit user control. Product shall be UL listed and less all trim. Product shall be drilled for K-9623 grip rails (required). Bath whirlpool shall be Kohler Model K-792-\_\_\_\_\_-\_\_\_\_\_-\_\_\_\_\_.

# STEEPING™

## Technical Information

Fixture*:	
Basin area:	
Bathing well	43" (109.2 cm) x 19" (48.3 cm)
Top area	54" (137.2 cm) x 30" (61 cm)
Weight	420 lbs (190.5 kg)
To overflow:	
Water depth	15" (38.1 cm)
Capacity	62 gal (234.7 L)
* Approximate measurements for comparison only.	

Product	kW	V	A*
Neckjets:	1.5	240	15
Without neckjets:	1.5	240	11
* Approximate measurements for comparison only.			

Drop-in cut-out	58-1/2" (148.6 cm) x 34-1/2" (87.6 cm)
Cut-out for undermount	K-584 template

## Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Pump/control 208-240 V, 20 A, 50/60 Hz

## Installation Notes


Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 64 lbs/square foot (313 kg/square meter) loading.

Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

**K-792-N1**

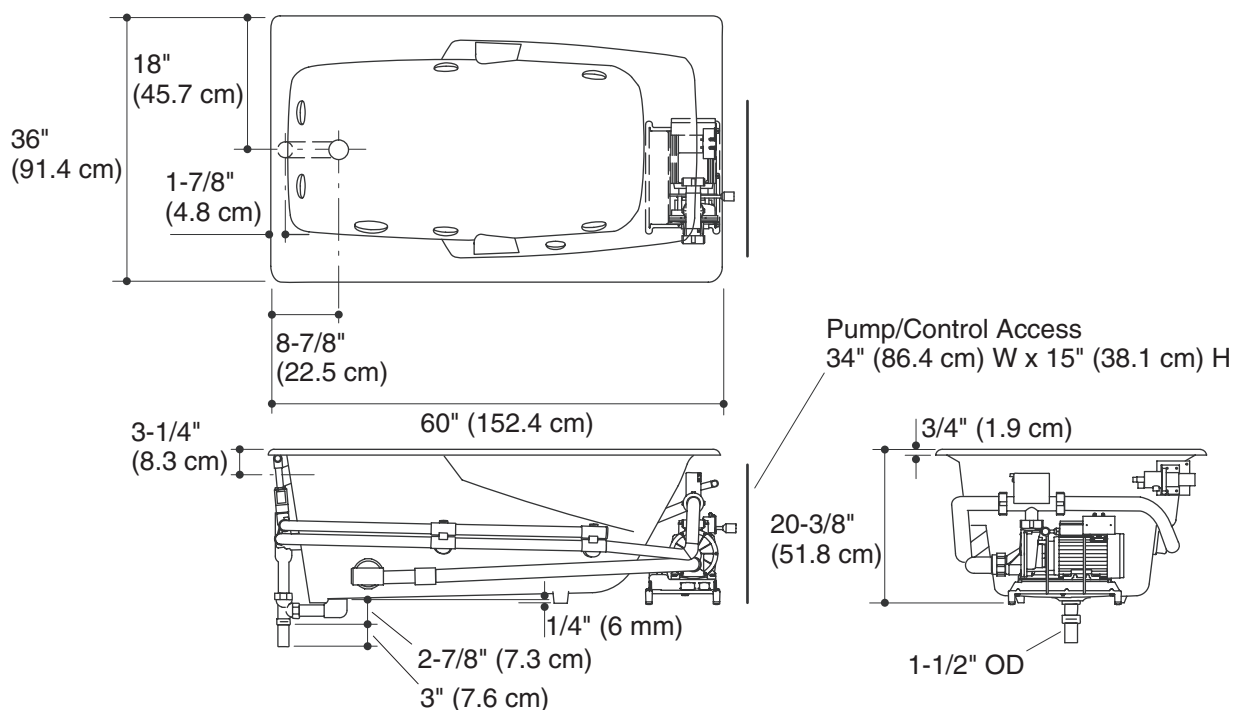

## Product Diagram