

Features


- Cast iron with Safeguard® finish
- Variable speed pump with 1.5 kW heater, back-lit user keypad, and remote control
- 6 Flexjets™
- UL listed
- Less all trim
- Drilled for required grab bars
- Custom pump locations
- 60" (1524 mm) x 36" (914 mm) x 20-3/8" (518 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.1/CSA B45.2
- ASME A112.19.7
- CSA C22.2 No 218.2
- UL 1795

BATH WHIRLPOOL K-792-HB ALSO K-792-HE, K-792-HJ

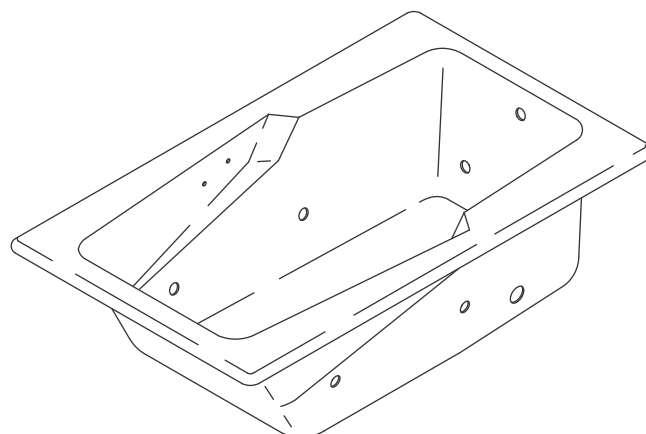

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-792-HB	Bath whirlpool, custom pump	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-792-HE	Bath whirlpool, custom pump	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-792-HJ	Bath whirlpool, custom pump	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Required Accessories

K-9623	Grab bars (pair)	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-9696	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Recommended Accessories

K-7161-AF	Clearflo pop-up bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
-----------	----------------------------	-----------------------------	-----------------------------	-------------------------------------

Product Specification

The bath whirlpool shall be made of cast iron with Safeguard finish. Bath whirlpool shall be 60" (1524 mm) in length, 36" (914 mm) in width, and 20-3/8" (518 mm) in height. Bath whirlpool shall have 6 Flexjets, a variable speed pump, 1.5 kW heater, back-lit user control, and custom pump locations. Bath whirlpool shall be UL listed. Bath whirlpool shall be less all trim. Bath whirlpool shall be drilled for K-9623 Grab bars (required). Bath whirlpool shall be Kohler Model K-792-_____-_____.

STEEPING™

Technical Information

Fixture*:	
Weight	420 lbs (190.5 kg)
Basin area	43" (1092 mm) x 19" (483 mm)
Top area	54" (1372 mm) x 30" (762 mm)
Water depth	15" (381 mm) to overflow
Capacity	62 gal (234.7 L)
*Approximate measurements for comparison only.	

Pump	kW	V	A*
	1.5	240	11
* Approximate measurements for comparison only.			

Drop-in cut-out	58-1/2" (1486 mm) x 34-1/2" (876 mm)
Cut-out for undermount	K-584 template

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Pump/control 208-240 V, 20 A, 50/60 Hz

Installation Notes

Install this product according to the installation guide.

Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.

Floor support under whirlpool must provide for a minimum of 65 lbs/square foot (314 kg/square meter) loading.


Pump must be relocated to custom position at the time of the installation. Provide adequate clearance.

K-792-HB

Pump/Control Access

34" (864 mm) W x

15" (381 mm) H

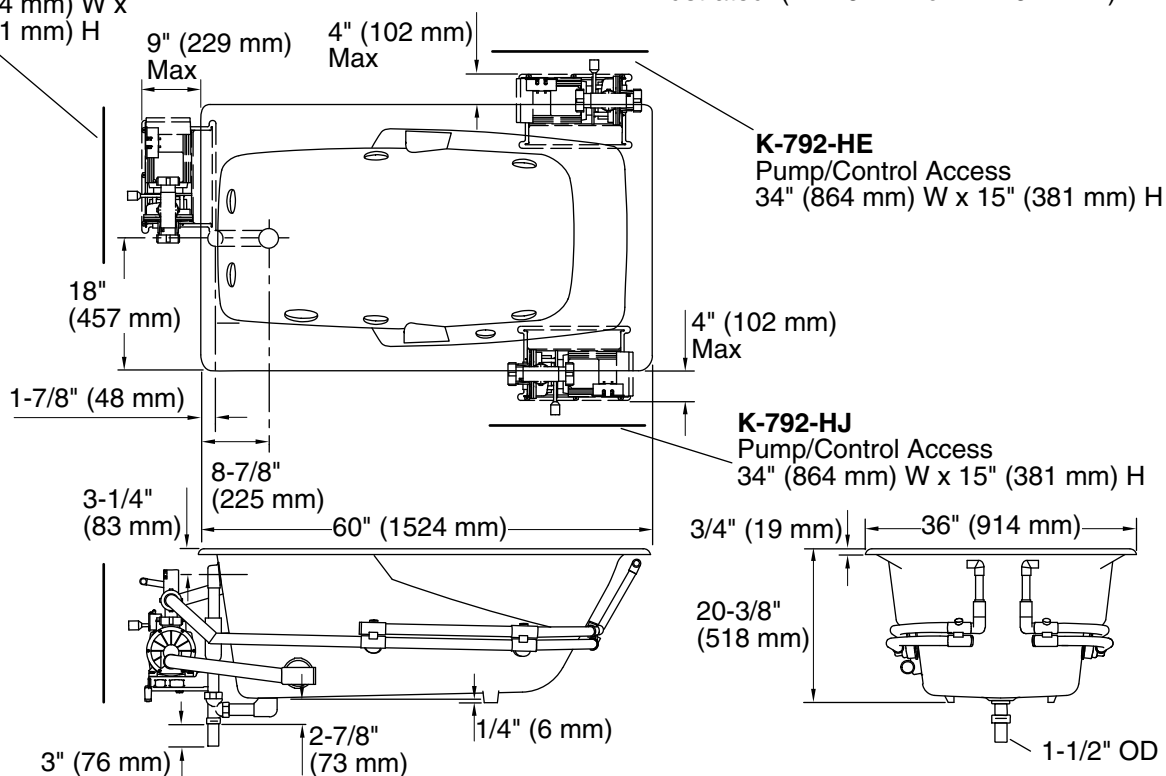

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

Product Diagram