

Features


- Cast iron with Safeguard® finish
- Left or right drain
- UL listed
- Less all trim
- Variable speed pump with 1.5 kW heater and back-lit user keypad
- 4 Flexjet™ jets
- ADA compliant when installed per Section 607 of the Act
- Drilled for K-9620 grab bars (required) [K-783-H2, K-784-H2]
- 60" (1524 mm) x 32" (813 mm) x 16-1/4" (413 mm)

BATH WHIRLPOOL

K-513-H2

ALSO K-514-H2, K-783-H2, K-784-H2

ADA

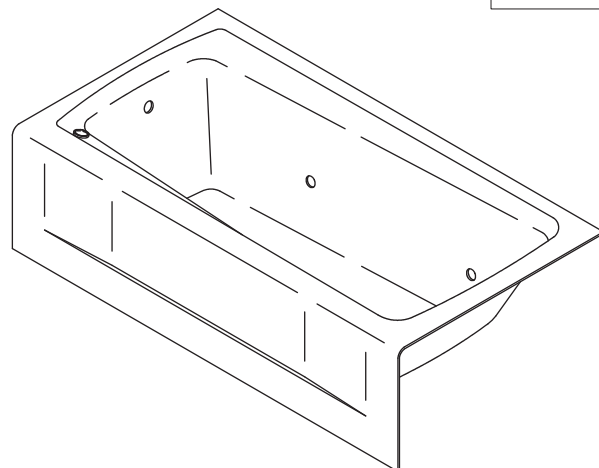

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.1/CSA B45.2
- ASME A112.19.7
- CSA B45.10
- CSA C22.2 No 218.2
- UL 1795
- ADA
- ICC/ANSI A117.1

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-513-H2	Bath whirlpool – less grab bars, left drain	☐ 0	☐ Other_____
K-514-H2	Bath whirlpool – less grab bars, right drain	☐ 0	☐ Other_____
K-783-H2	Bath whirlpool – grab bars, left drain	☐ 0	☐ Other_____
K-784-H2	Bath whirlpool – grab bars, right drain	☐ 0	☐ Other_____

Required Accessories

K-9694	4-jet trim kit	☐ 0	☐ CP	☐ Other_____
K-9620	Grab bars (pair) – required for K-783/K-784-H2		☐ CP	☐ Other_____

Recommended Accessories

K-7160-TF	Adjustable pop-up drain	☐ CP	☐ Other_____
-----------	-------------------------	-----------------------------	-------------------------------------

Product Specification

The cast iron bath whirlpool with Safeguard® finish shall be 60" (1524 mm) in length, 32" (813 mm) in width, and 16-1/4"(413 mm) in height. Product shall have 4 Flexjets, variable speed pump, 1.5 kW heater, and back-lit user keypad. Product shall have a left or right drain. Product shall be UL listed and less all trim. Bath whirlpool K-783-H2 and K-784-H2 shall be drilled for K-9620 grab bars (required). Bath whirlpool shall be Kohler Model K-____-H2-_____.

MENDOTA™/GUARDIAN™

Optional Accessories

K-1491	Pillow	☐ 0				☐ Other _____
K-1601	Footstop	☐ 0				☐ Other _____
K-1703	Remote control				☐ NA	
K-9497	2.5" (64 mm) metal finish keypad trim		☐ CP	☐ PB		☐ Other _____

Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	46" (1168 mm) x 20" (508 mm)
Basin area, top	53-3/4" (1365 mm) x 24" (610 mm)
Weight	460 lbs (208.7 kg)
To overflow:	
Water depth	10-3/4" (273 mm)
Capacity	45 gal (170.3 L)
* Approximate measurements for comparison only.	

Pump:	kW	V	A
	1.5	240	11

Minimum access panel pump/control:

32" (813 mm) W x 15" (381 mm) H required

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Pump/control 208-240 V, 20 A, 50/60 Hz

Installation Notes


NOTE: Pump protrusion beyond rim.

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 65 lbs/square foot (315 kg/square meter) loading.

No change in measurements if connected with drain illustrated. (K-7160-TF or K-7160M-TF)

K-783-H2

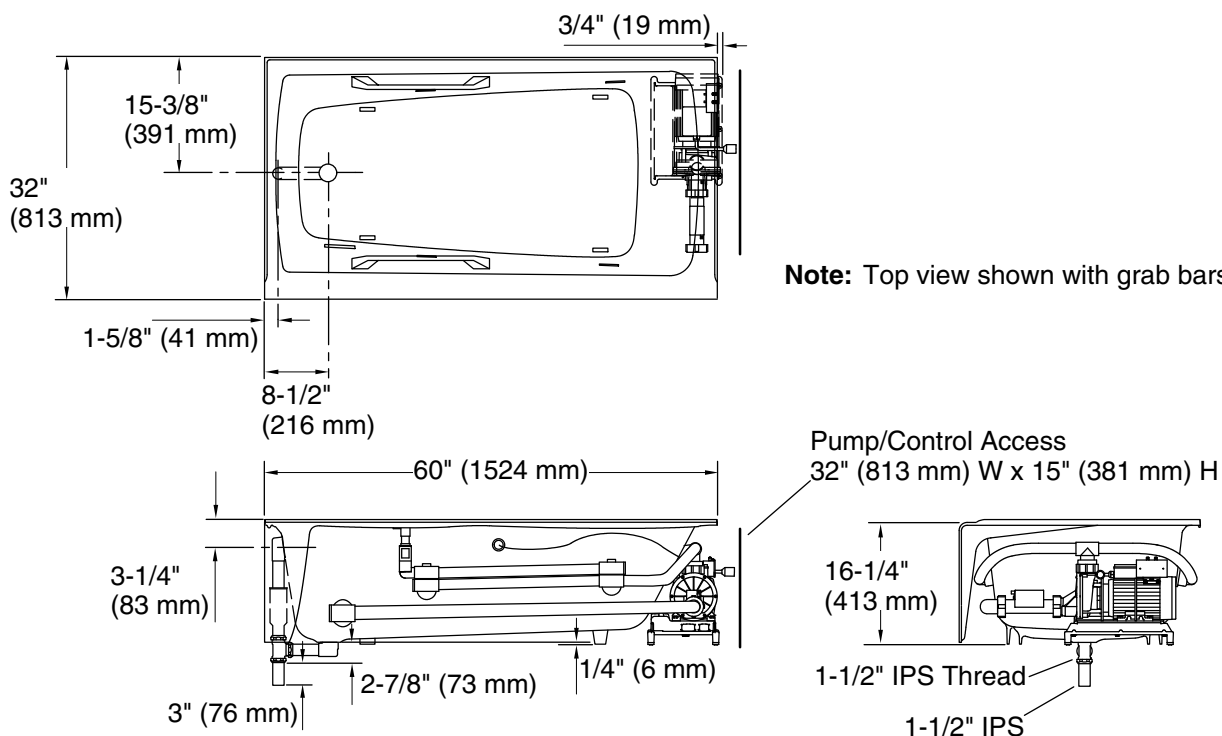

Product Diagram