

Features


- Cast iron with Safeguard® finish
- Less all trim
- Variable speed pump with 1.5 kW heater and back-lit user keypad
- 8 Flexjet™ hydro-massage jets
- Available as a drop-in installation (-H2) or alcove installation (-LH or -RH)
- 66" (1676 mm) x 36" (914 mm) x 24" (610 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.1/CSA B45.2
- ASME A112.19.7
- CSA B45.10
- CSA C22.2 No 218.2
- UL 1795

5.5' BATH WHIRLPOOL K-809-H2 ALSO K-809-LH, K809-RH

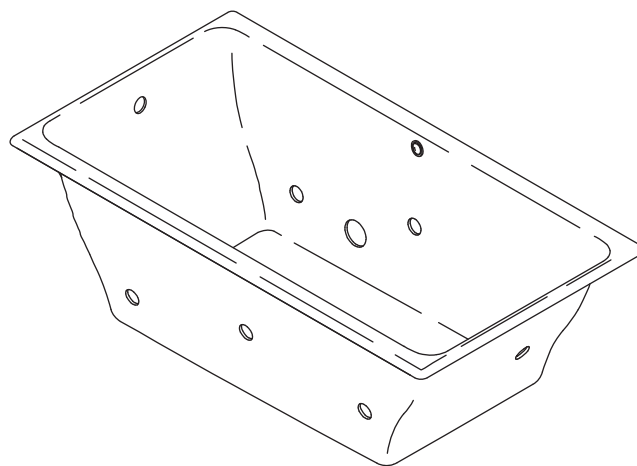

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-809-H2	5.5' bath whirlpool – drop-in	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-809-LH	5.5' bath whirlpool for alcove installation – drop-in, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-809-RH	5.5' bath whirlpool for alcove installation – drop-in, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Required Accessories

K-9698	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-7145	Kathryn® bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Optional Accessories

K-587	Undermount installation kit (template and installation instructions)	<input type="checkbox"/> NA
-------	--	-----------------------------

Product Specification

The drop-in bath whirlpool shall be 66" (1676 mm) in length, 36" (914 mm) in width, and 24" (610 mm) in height. Bath whirlpool shall be made of cast iron with Safeguard® finish. Bath whirlpool shall have 8 Flexjet™ hydro-massage jets, a variable speed pump with 1.5 kW heater, and back-lit user keypad. Bath whirlpool shall be available as a drop-in installation (-H2) or alcove installation (-LH or -RH). Bath whirlpool shall be less all trim. Bath whirlpool shall be Kohler Model K-809-_____-_____-_____.

Technical Information

Fixture*:	
Bathing well:	
Basin area	45" (1143 mm) x 25" (635 mm)
Top area	58" (1473 mm) x 29" (737 mm)
Weight	510 lbs (231.3 kg)
To overflow:	
Water depth	17-3/4" (451 mm)
Capacity (to overflow)	97 gal (365.2 L)
* Approximate measurements for comparison only.	

Pump	kW	V	Hz	A*
	1.5	240	50/60	11
* Approximate measurements for comparison only.				

Cut-out template:	
Drop-in	64-1/2" (1638 mm) x 34-1/2" (876 mm)
Undermount	K-587

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Pump/control 208-240 V, 20 A, 50/60 Hz

Installation Notes

Install this product according to the installation guide.


Cast iron bath whirlpools are extremely heavy, making some drop-in installations difficult. For deck-mount installations, splitting the deck/surround is recommended.

The required access panel must be a minimum of 34" (864 mm) in width and 15" (381 mm) in height.

Floor support under whirlpool must provide for a minimum of 82 lbs/square foot (398 kg/square meter) loading.

The hot water supply should be 70% of capacity or greater. Installations will vary.

K-809-H2

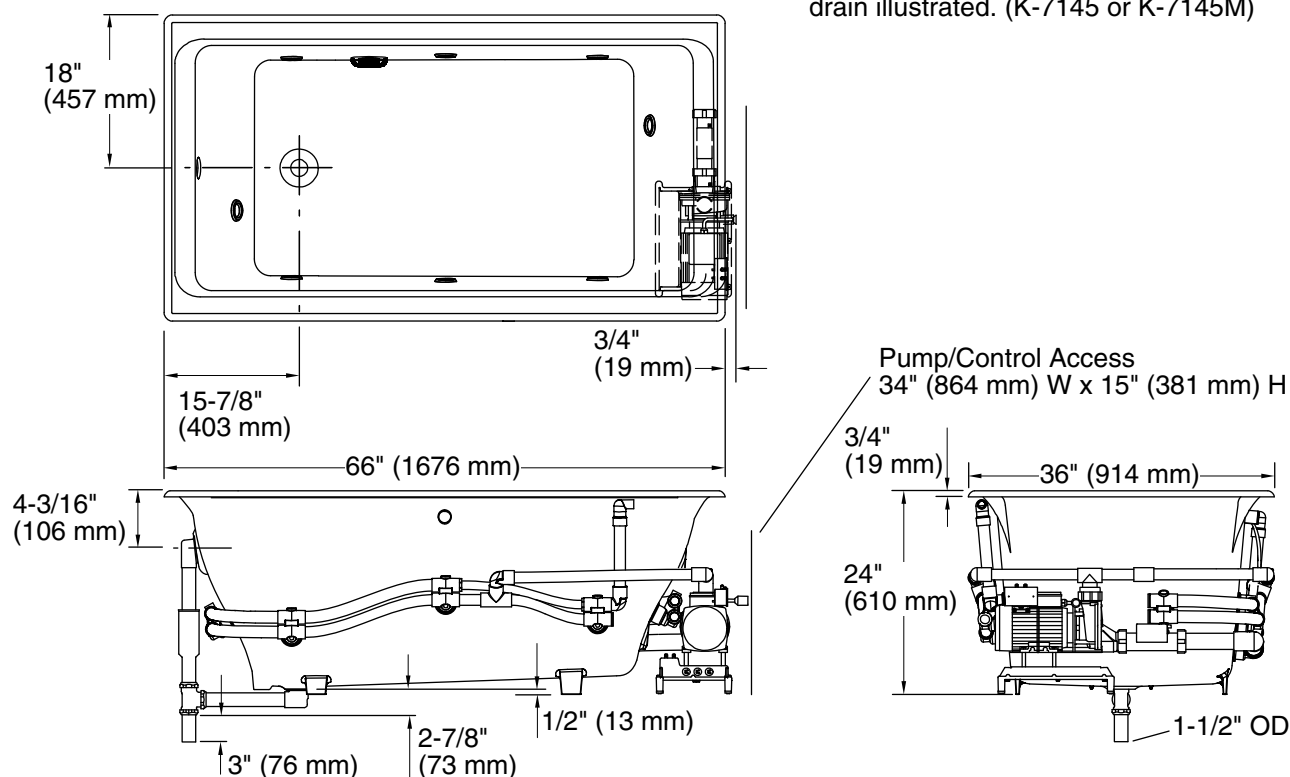

No change in measurements if connected with drain illustrated. (K-7145 or K-7145M)

Product Diagram