

Features


- Acrylic
- Variable speed pump with 1.5 kW heater, back-lit user keypad, and remote control
- 8 Flexjet™ whirlpool jets
- Less all trim
- Custom pump locations
- 72" (1829 mm) x 42" (1067 mm) x 22" (559 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7
- ASTM E162
- ASTM E662
- UL 1795
- CSA B45.5/IAPMO Z124

6' CUSTOM BATH WHIRLPOOL K-1375-HB ALSO K-1375-HF/-HJ/-HN

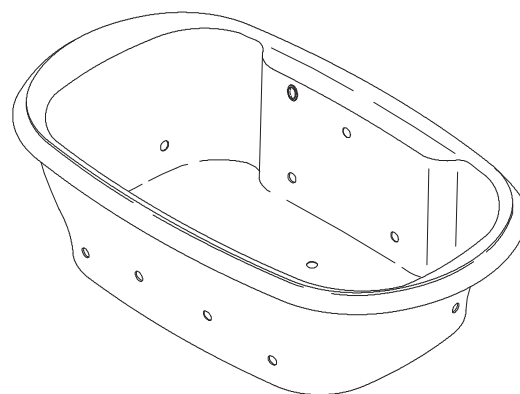

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1375-HB	6' bath whirlpool, custom pump	☐ 0	☐ Other_____
K-1375-HF	6' bath whirlpool, custom pump	☐ 0	☐ Other_____
K-1375-HJ	6' bath whirlpool, custom pump	☐ 0	☐ Other_____
K-1375-HN	6' bath whirlpool, custom pump	☐ 0	☐ Other_____

Required Accessories

K-9698	Jet trim kit	☐ CP	☐ PB	☐ Other_____
--------	--------------	-----------------------------	-----------------------------	-------------------------------------

Recommended Accessories

K-7161-AF	Adjustable pop-up drain	☐ CP	☐ PB	☐ Other_____
-----------	-------------------------	-----------------------------	-----------------------------	-------------------------------------

Optional Accessories

K-1491	Pillow	☐ 0	☐ Other_____
Refer to the Kohler Price Book for additional accessories			

Product Specification

The acrylic bath whirlpool shall be 72" (1829 mm) in length, 42" (1067 mm) in width, and 22" (559 mm) in height. Bath whirlpool shall have 8 Flexjets™, a variable speed pump with 1.5 kW heater, back-lit user keypad and remote control. Bath whirlpool shall be less all trim. Bath whirlpool shall be Kohler Model K-1375-_____-_____.

REVIVAL®

Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	50" (1270 mm) x 29" (737 mm)
Basin area, top	61" (1549 mm) x 32" (813 mm)
Weight	130 lbs (59 kg)
To overflow:	
Water depth	16" (406 mm)
Capacity	100 gal (378.5 L)
* Approximate measurements for comparison only.	

Pump	kW	V	A*
	1.5	240	11
* Approximate measurements for comparison only.			

Included component:	
Cut-out template	113311-7

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):	
Pump/control	208-240 V, 20 A, 50/60 Hz

Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 48 lbs/square foot (231 kg/square meter) loading.


Hot water supply should be 70% of capacity or greater.
Installations will vary.

If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

Pump must be relocated to custom position at the time of installation. Provide adequate clearance.

No change in measurements if connected with drain illustrated. (K-7161-AF)

Recommended faucet area.

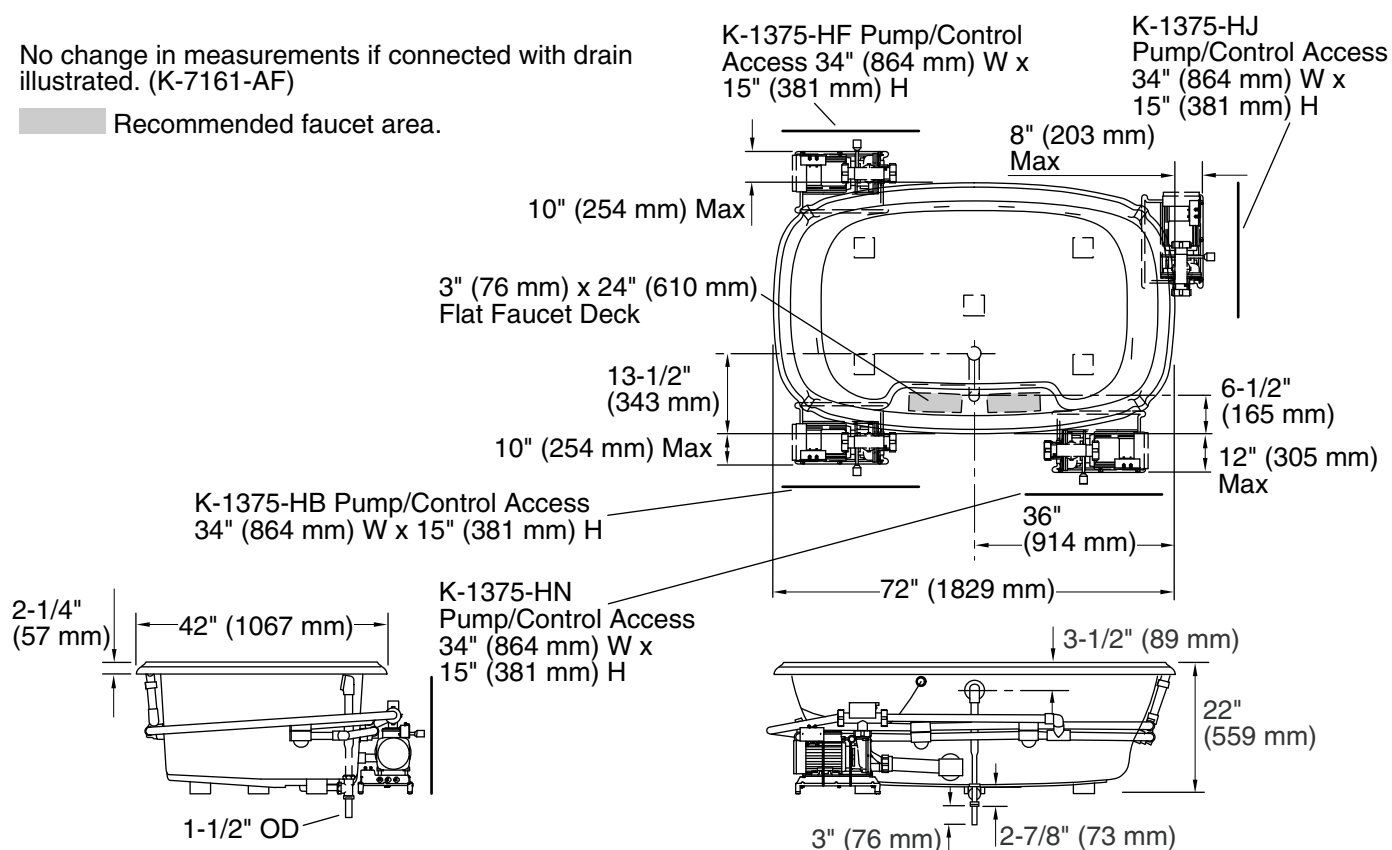

Product Diagram