


Features

- Acrylic
- Variable speed pump with 1.5 kW heater, back-lit user keypad, and remote control
- 8 Flexjets™
- Less all trim
- UL listed
- Custom pump location
- 60" (152.4 cm) x 32" (81.3 cm) x 20" (50.8 cm)

5' CUSTOM BATH WHIRLPOOL K-1014-HA

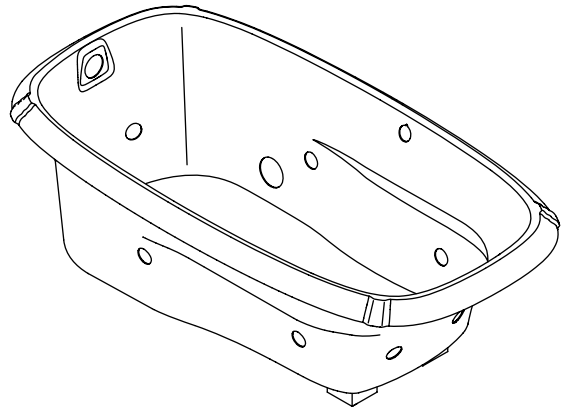

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASME A112.19.7M
- UL 1795
- ASTM E162
- ASTM E662

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes		
K-1014-HA	5' custom bath whirlpool	☐ 0	☐ Other_____	
Required Accessories				
K-9698	Jet trim kit	☐ CP	☐ PB	☐ Other_____
Recommended Accessories				
K-7161-AF	Adjustable pop-up drain	☐ CP	☐ PB	☐ Other_____
Optional Accessories				
K-1491	Pillow	☐ 0	☐ Other_____	
K-1601	Footstop	☐ 0	☐ Other_____	
K-1703	Remote control			☐ NA

Product Specification

The acrylic bath whirlpool shall be 60" (152.4 cm) in length, 32" (81.3 cm) in width, and 20" (50.8 cm) in height. Product shall have 8 Flexjets, a variable speed pump with 1.5 kW heater, back-lit user keypad, and remote control. Product shall have a custom pump location. Product shall be UL listed. Product shall be less all trim. Bath whirlpool shall be Kohler Model K-1014-HA-_____.

PORTRAIT®

Technical Information

Fixture*:	
Basin area:	
Bathing well	42" (106.7 cm) x 20" (50.8 cm)
Top area	51" (129.5 cm) x 24" (61 cm)
Weight	110 lbs (49.8 kg)
To overflow:	
Water depth	14" (35.6 cm)
Capacity	60 gal (227 L)
* Approximate measurements for comparison only.	

Included component:	
Cut-out template	1022451-7

Pump:	V	Hz	A
Variable speed	220-240	50/60	11
Heater:	kW	V	Hz
	1.5	220-240	50/60
			11

Required Electrical Service

Dedicated circuit required, protected with a Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Pump/control 220-240 V, 11 A, 50/60 Hz

Locate the outlet behind the whirlpool and within 24" (61 cm) of the pump and heater.

Installation Notes


Install this product according to the installation guide.

Pump must be relocated to custom position at the time of installation. Provide adequate clearance.

Floor support under whirlpool must provide for a minimum of 48 lbs/square foot (233 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

No change in measurements with drain shown. (K-7161-AF or K-7161M-AF)

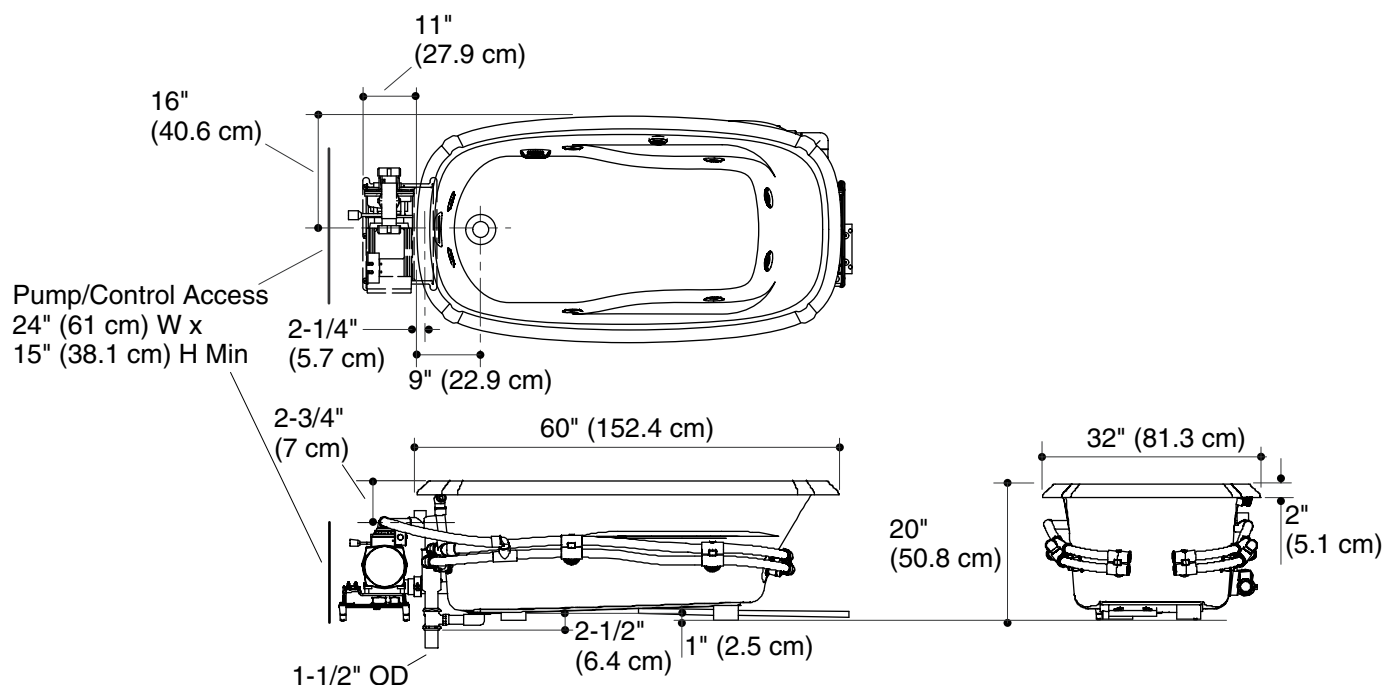

Product Diagram