

FEATURES

- 60" x 32" Shower Walls for new and existing construction.
- Thick 1/4" 100% solid surface material bonded to an 1-1/4" thick aluminum honeycomb polyurethane filled backer for superior strength. Solid surface material is easy to clean and will not support bacteria growth.
- 4-piece wall design glues directly to studs with supplied adhesive. Back wall can be alternately installed with aluminum hanging rail provided.
- Aluminum channel joints for easy installation and uniform structure.
- Four wall shelves included for convenient storage
- Wall Kit includes 8" long chrome shower arm, 15" slotted hanging rail, four 11-oz. tubes quick dry panel adhesive and two 11-oz. tubes 100% silicone adhesive.
- 10 Year Limited Residential Warranty / 3 Year Commercial Warranty

COLORS

- 4 Transitions colors with a 16" x 16" square tile pattern.

OPTIONS

- Dome Top slides in place and sits on top of the shower walls forming a complete 8' shower enclosure. The dome contains (3) waterproof UL approved 12 volt LED lights (40 year life).
- Matching shower base with concealed drain.
- Corner or Rectangular Shower Seats also available. See Accessories Specification sheet for details.



Shown with F6020L Shower Base, T6021 Dome Top


	SIZE	LEFT HAND MODEL NO		RIGHT HAND MODEL NO	Width	Depth	Height
COMPLETE SHOWER KITS							
	Walls & Base Kit						
☐	60" x 32"	DKWF6028L	☐	DKWF6028R	60"	32"	83"
	Walls, Base & Extension Walls Kit						
☐	60" x 32"	DKWFT6028L	☐	DKWFT6028R	60"	32"	95¾"
SHOWER WALLS (only) KIT							
☐	60" x 32"	DKWE6028			60"	32"	80"
	60" x 80"	DB608 Back Wall (2 pcs.)			60"		80"
	32" x 80"	DE328 End Wall Set (2 pcs.)			32"		80"
INDIVIDUAL COMPONENTS							
	Shower Base						
☐	60" x 32"	F6032L	☐	F6032R	60"	32"	3"
	Dome Top						
☐	60" x 32"	T6021			60"	32"	12¾"

To Be Specified: Color (see below)**16" Square Tile Pattern / Colors**

☐	91 White Carrara
☐	92 Silver Mocha
☐	94 Sand Mountain
☐	96 Almond Sky

Compliance Certifications -**Meets or Exceeds the Following Specifications**

- IGC 154-2012
- ASME A112.18.1-2011 / CSA B125.1-11
- cUPC®

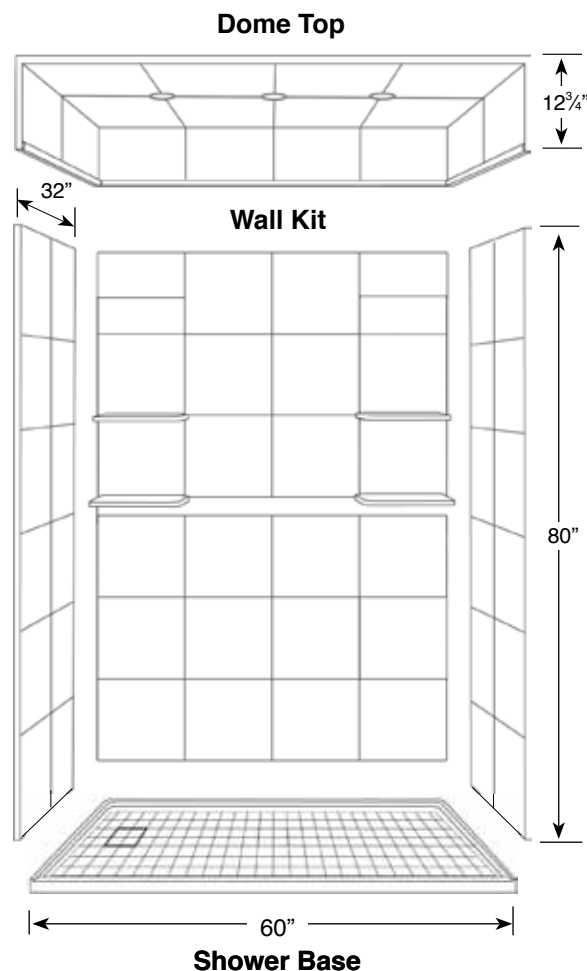



INSTALLATION NOTES

This product is to be installed according to the installation guide.

Drain cutout in subfloor to be 4-1/2" diameter and located per the rough-in Illustration 1. Dry fit the shower base to ensure a proper fit and correct alignment of the shower drain and the hole in the floor.

Unit can be installed with aluminum hanging rail provided. Alternate adhesive method of installation can be used without the use of the hanging rail (see full instructions for details). Position of hanging rail mounting is also critical. See Illustration 2 for horizontal positioning of hanging rail. The top of the hanging rail to be positioned at 76" above finished floor when using a 3" high Transolid shower base. When you do not use a Transolid shower base the upper hanging rail should be installed 73" above the finished threshold.

Illustration 1

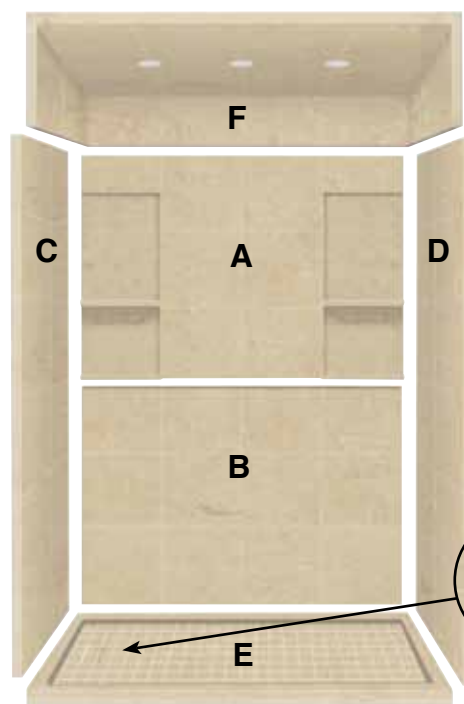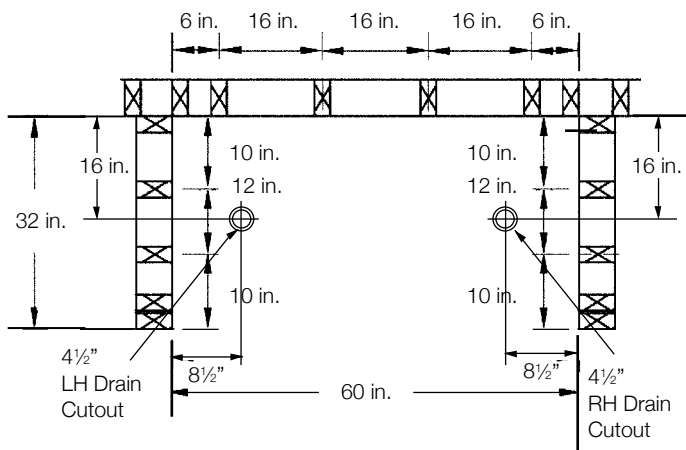


Strong 2-layer construction

1 1/4" thick Aluminum Honeycomb Backer provides strength and structure.




1/4" thick solid surface material for beauty and smooth bacteria free surface

Aluminum Channel Joints for easy installation



Concealed drain with color-matched lift-off drain cover, 2 1/4" mosaic tile pattern.

Illustration 2

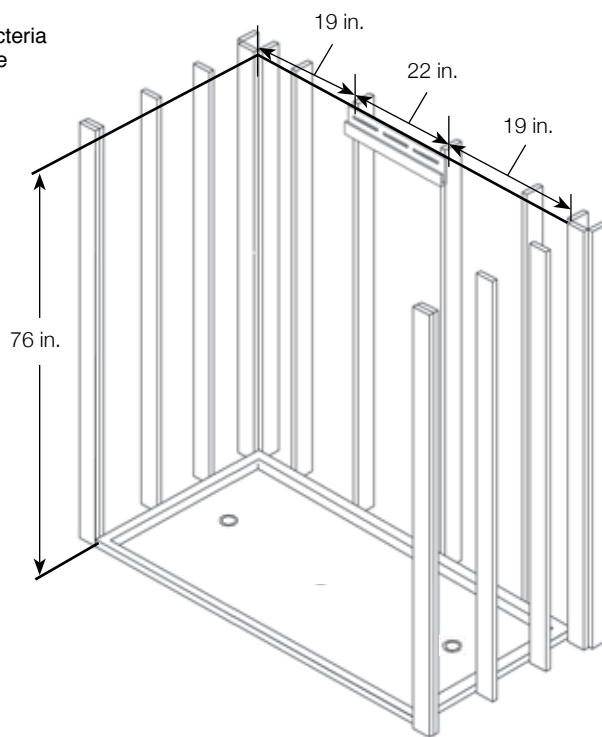



	MODEL NO.	DESCRIPTION
A	DB608U	Upper Back Wall (1 panel)
B	DB608D	Lower Back Wall (1 panel)
C	DE328L	Left End Wall (1 panel)
D	DE328R	Right End Wall (1 panel)
E	F6032L	Shower Base - LH drain (shown)
E	F6032R	Shower Base - RH drain
F	T6021	Dome Top with (3) LED Lights

Product Information

	SHOWER DOOR	
MODEL NO.	MAXIMUM WIDTH	MAXIMUM HEIGHT
DKW6028	57"	80"

OPTIONS: ACCESSORIES

Available for on-site installation. Must be ordered separately. See Accessories Specification for further information.

Corner Shower Seat
CSS1414Rectangular Shower Seat
RSS2412