

Features


- Acrylic
- 120 BubbleMassage™ airjets
- Drop-in
- Textured bottom surface
- UL listed
- Blower motor with 300 W heater and electronic user control
- 60" (152.4 cm) x 32" (81.3 cm) x 20" (50.8 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- UL 1795
- ASTM E162
- ASTM E662

5' BUBBLEMASSAGE™ BATH K-1357-G

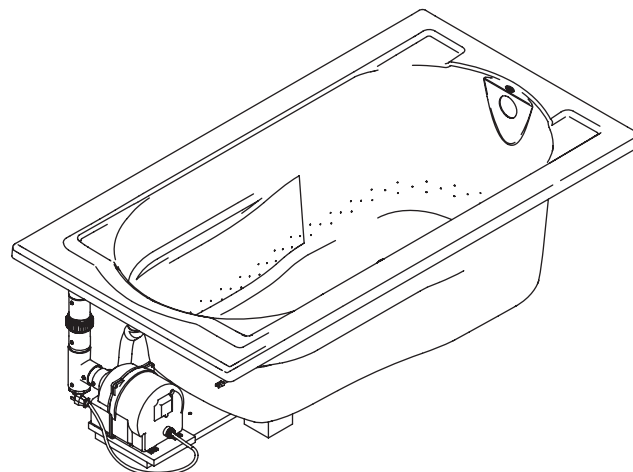

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-1357-G	5' Bubblemassage bath	☐ 0	☐ Other_____	
Recommended Accessories				
K-7161-AF	Adjustable pop-up drain	☐ CP	☐ PB	☐ Other_____
Optional Accessories				
K-1446	Remote blower installation kit	☐ NA		

Product Specification

The acrylic drop-in Bubblemassage bath shall be 60" (152.4 cm) in length, 32" (81.3 cm) in width, and 20" (50.8 cm) in height. Bath shall have a blower motor with 300 W heater and an electronic user control. Bath shall feature a textured bottom surface and 120 Bubblemassage airjets. Bath shall be UL listed. Bubblemassage bath shall be Kohler Model K-1357-G-_____.

DEVONSHIRE®

Technical Information

Fixture*:				
Basin area:				
Bathing well		42" (106.7 cm) x 20" (50.8 cm)		
Top area		51" (129.5 cm) x 24" (61 cm)		
Weight		84 lbs (38.1 kg)		
To overflow:				
Water depth		14" (35.6 cm)		
Capacity		60 gal (227.1 L)		
* Approximate measurements for comparison only.				
Drop-in cut-out		58" (147.3 cm) x 30" (76.2 cm)		
Blower motor:	Heater	V	Hz	A
	300 W	120	60	5

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Blower motor:	120 V, 15 A, 60 Hz
Blower motor is supplied with a 24" (61 cm) grounding-type plug-in cord.	


Installation Notes

NOTICE: If the blower motor and check valve are relocated, the following two procedures are required: 1. Provide two access panels. Locate one access panel at the blower motor/control location and the other access panel at the control box. **2.** Relocate the blower motor and the check valve together. Do not relocate one without the other.

Install this product according to the installation guide.

Floor support under the bath must provide for a minimum of 47 lbs/square foot (230 kg/square meter) loading.

A blower motor access panel is required.

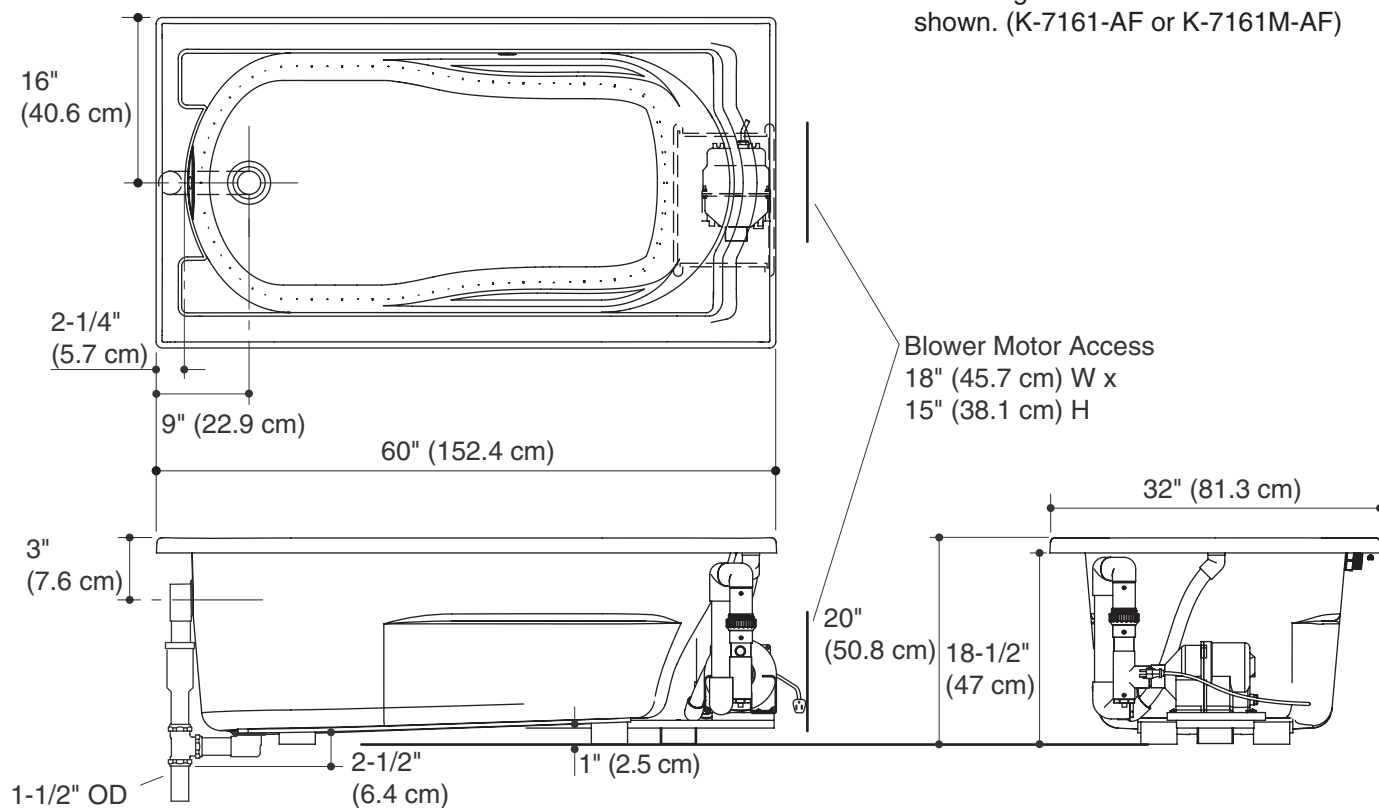

Product Diagram