

### Features


- Acrylic
- 8 color-matched Kohler hydro-massage jets
- Single-speed pump with air switch
- In-line heater
- Textured bottom surface
- Left or right drain
- Integral apron with removable access panel
- Integral tile flange on three sides for alcove installation
- 60" (152.4 cm) x 32" (81.3 cm) x 20" (50.8 cm)

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- UL 1795
- ASME A112.19.7

### BATH WHIRLPOOL WITH HEATER K-1151-HL ALSO K-1151-HR

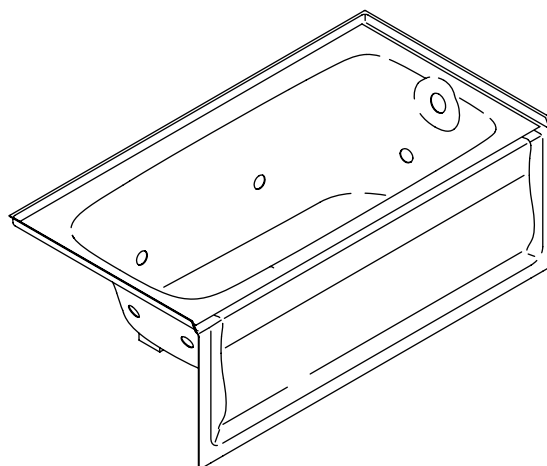

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-1151-HL	Bath whirlpool with heater – left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1151-HR	Bath whirlpool with heater– right drain (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
<b>Recommended Accessories</b>			
K-11677	Bath drain – through-the-floor	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

### Product Specification

The acrylic bath whirlpool shall be 60" (152.4 cm) in length, 32" (81.3 cm) in width, and 20" (50.8 cm) in height. Product shall feature an integral flange on three sides for alcove installation. Product shall feature 8 color-matched Kohler jets, a single-speed pump with air switch, and an in-line heater. Product shall feature an integral apron with removable access panel and textured bottom surface. Product shall be available with a left or right drain. Bath whirlpool shall be Kohler Model K-1151-\_\_\_\_-\_\_\_\_.

# BANCROFT® 5'

## Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	45" (114.3 cm) x 22" (55.9 cm)
Basin area, top	54" (137.2 cm) x 25" (63.5 cm)
Weight	140 lbs (63.5 kg)
To overflow:	
Water depth	15" (38.1 cm)
Capacity	60 gal (227.1 L)
* Approximate measurements for comparison only.	

Pump:		V	Hz	A
1-speed		120	60	7
Heater:	kW	V	Hz	A
	1.5	120	60 Hz	12.5

## Required Electrical Service

Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control	120 V, 15 A, 60 Hz
Heater	120 V, 15 A, 60 Hz


Locate the outlets behind the whirlpool and within 24" (61 cm) of the pump and heater.

## Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 50 lbs/square foot (244 kg/square meter) loading.

No change in measurements if connected with drain illustrated. (K-11677)

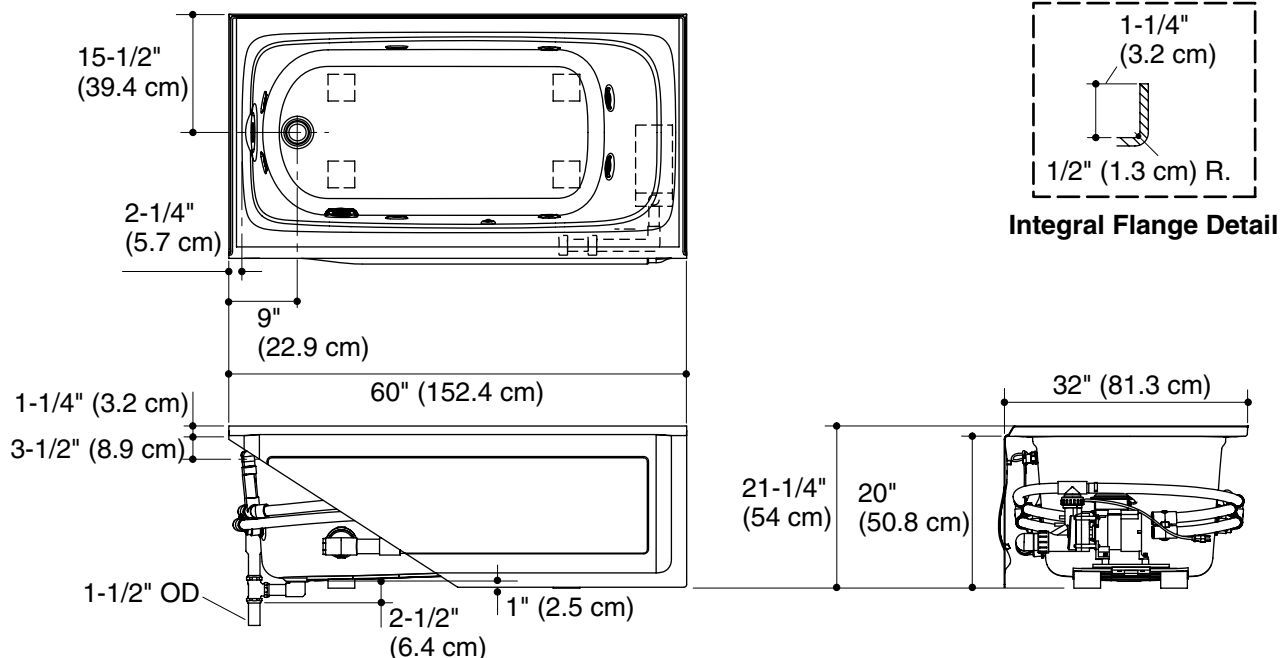

## Product Diagram