

Features


- Cast iron with Safeguard® finish
- Less all trim
- Custom pump locations
- Variable speed pump with 1.5 kW heater and back-lit user keypad
- 8 Flexjet™ hydro-massage jets
- 66" (1676 mm) x 36" (914 mm) x 24" (610 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.1/CSA B45.2
- ASME A112.19.7
- CSA B45.10
- CSA C22.2 No 218.2
- UL 1795

5.5' BATH WHIRLPOOL K-809-HE ALSO K-809-HN

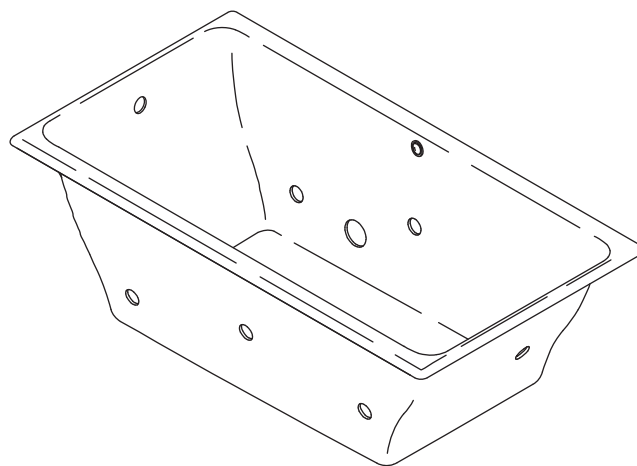

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-809-HE	5.5' bath whirlpool, custom pump location	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-809-HN	5.5' bath whirlpool, custom pump location	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Required Accessories

K-9698	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-7145	Kathryn® bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Optional Accessories

K-587	Undermount installation kit	<input type="checkbox"/> NA
K-1703	Remote control	<input type="checkbox"/> NA

Product Specification

The bath whirlpool shall be 66" (1676 mm) in length, 36" (914 mm) in width, and 24" (610 mm) in height. Product shall be made of cast iron with Safeguard® finish. Product shall have 8 Flexjet™ hydro-massage jets, a variable speed pump with 1.5 kW heater, and back-lit user keypad. Product shall have custom pump locations. Product shall be less all trim. Bath whirlpool shall be Kohler Model K-809-_____-_____.

Technical Information

Fixture*:	
Bathing well:	
Basin area	45" (1143 mm) x 25" (635 mm)
Top area	58" (1473 mm) x 29" (737 mm)
Weight	510 lbs (231.3 kg)
To overflow:	
Water depth	17-3/4" (451 mm)
Capacity	97 gal (365.2 L)
* Approximate measurements for comparison only.	

Pump	kW	V	Hz	A*
	1.5	240	50/60	11
* Approximate measurements for comparison only.				

Cut-out template:	
Drop-in	64-1/2" (1638 mm) x 34-1/2" (876 mm)
Undermount	K-587

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Pump/control 208-240 V, 20 A, 50/60 Hz

Installation Notes

Install this product according to the installation guide.


Floor support under whirlpool must provide for a minimum of 82 lbs/square foot (398 kg/square meter) loading.

The required access panel must be a minimum of 34" (864 mm) in width and 15" (381 mm) in height.

Cast iron bath whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing the bath to a deck.

Hot water supply should be 70% of capacity or greater. Installations will vary.

The pump must be relocated to the custom location at the time of installation. Provide adequate clearance.

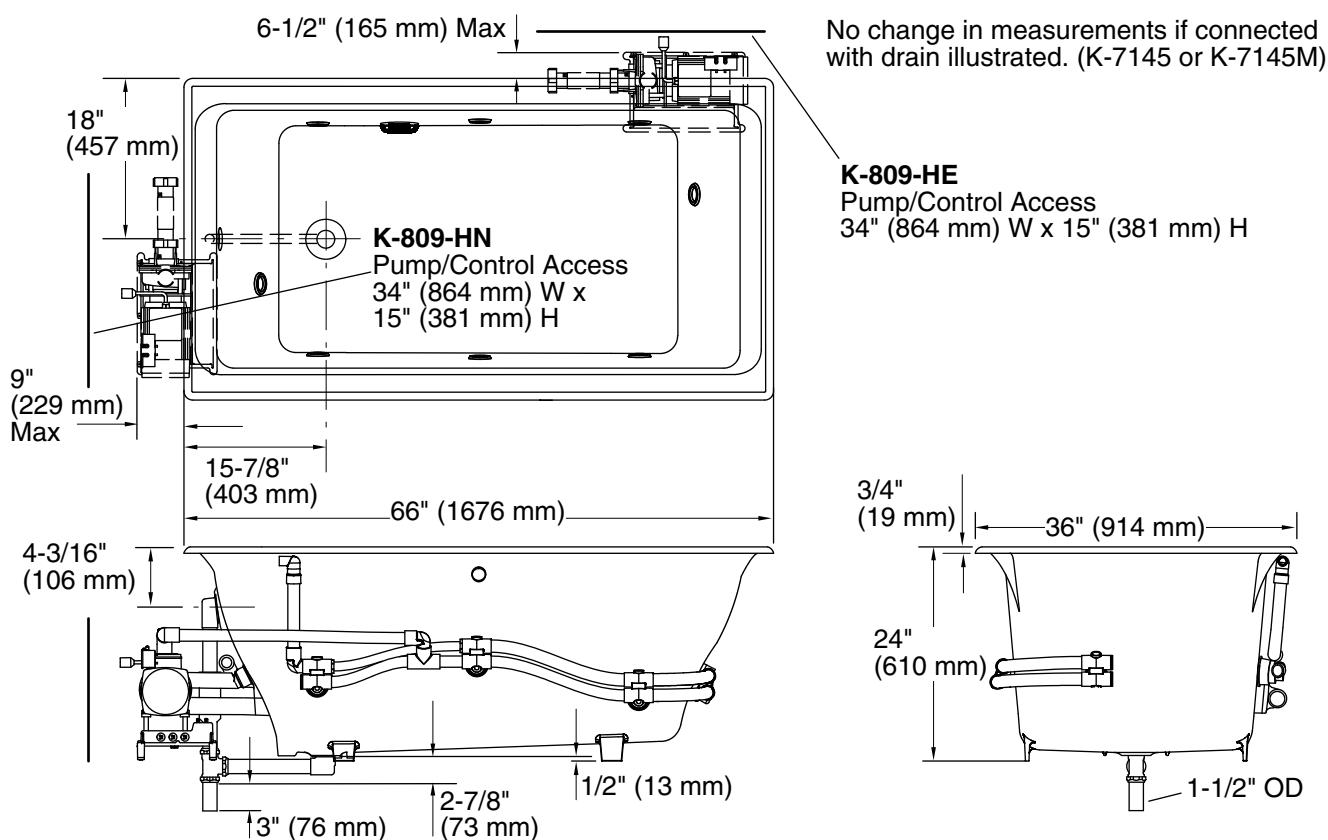

Product Diagram