

Features

- *Compression molded from our exclusive solid Vikrell® material*
- *Durable high-gloss finish*
- *10-year consumer/3-year commercial limited warranty*
- *Integral apron with removable access panel*
- *18" (45.7 cm) bath depth (floor to top of dam)*
- *2" (5.1 cm) wainscot/tile ledge*
- *60" (152.4 cm) x 32-1/8" (81.6 cm) x 21" (53.3 cm) rough-in dimensions include flanges*
- *60" (152.4 cm) x 32" (81.3 cm) x 20" (50.8 cm) finished dimensions*

Codes/Standards Applicable

Specified model meets or exceeds the following:


- *ASTM E162*
- *ASTM E662*
- *CSA B45.5/IAPMO Z124*

32" (81.3 cm) BATH WITH ACCESS

PANEL

71121117

ALSO 71121127

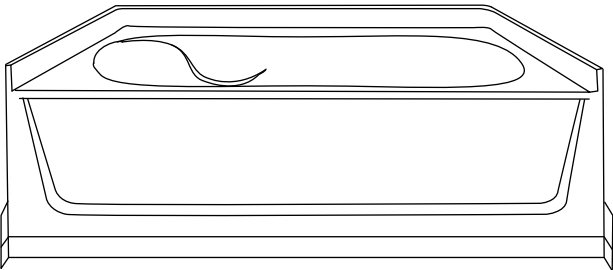

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Complete Unit Description	Colors/Finishes	
71121117	32" (81.3 cm) bath with access panel, left drain	☐ 0	☐ Other_____
71121127	32" (81.3 cm) bath with access panel, right drain (shown)	☐ 0	☐ Other_____

ENSEMBLE™

Technical Information

Fixture*:	
Bathing well	42" (106.7 cm) x 20" (50.8 cm)
Top area	54" (137.2 cm) x 26" (66 cm)
To overflow:	
Water depth	13-3/4" (34.9 cm)
Capacity	55 gal (208.2 L)
* Approximate measurements for comparison only.	

Model	door maximum width	door maximum height
71121117	57-11/16" (146.5 cm)	NA*
71121127		
* Varies with alternative walls.		


Installation Notes

Install this product according to the installation guide.

Size the drain cutout to fit the drain assembly that will be used.

Stud positioning is critical.

Studs should be positioned roughly as shown for support clip or roofing nail installation.

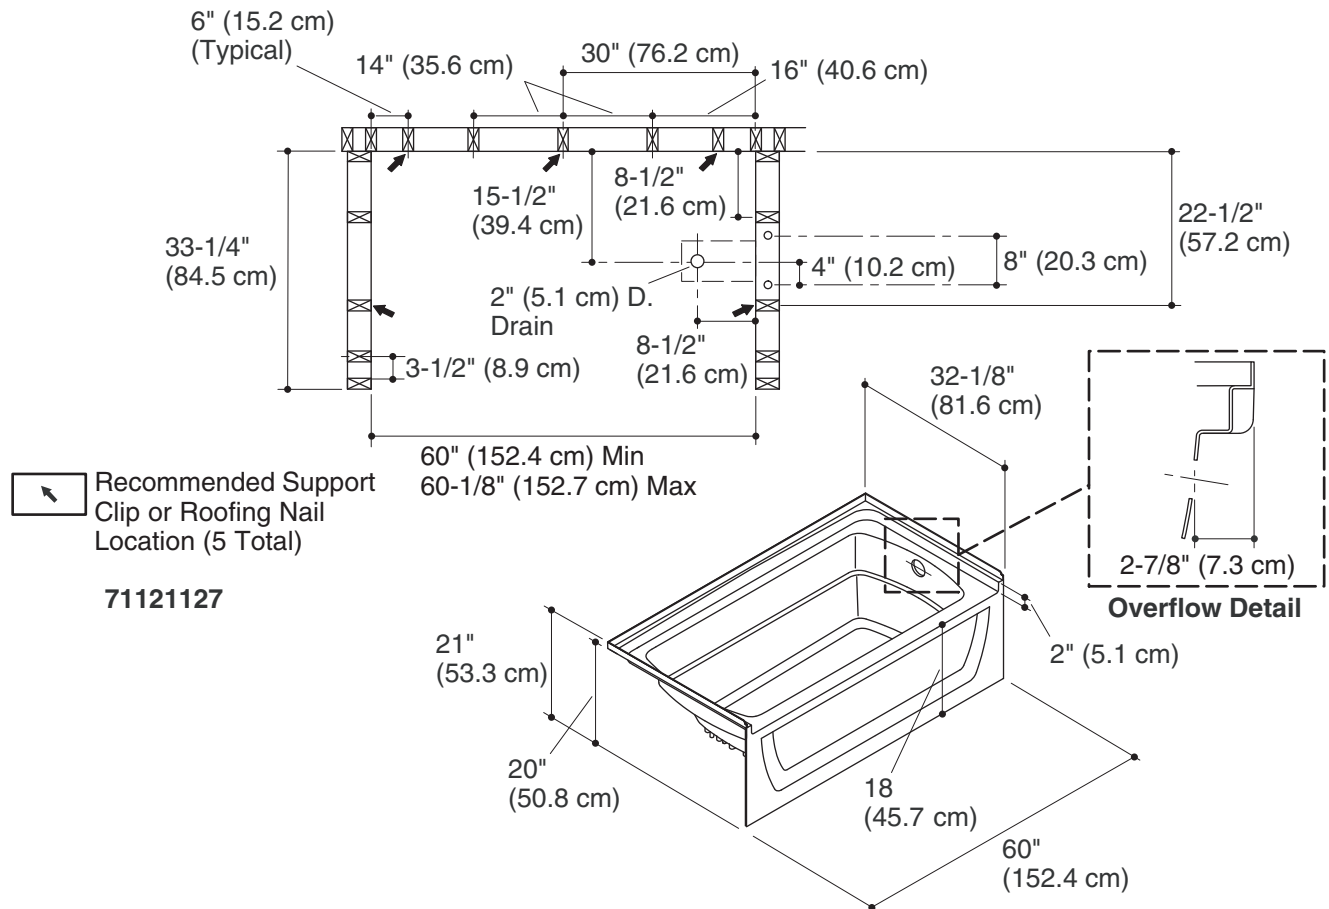

Product Diagram