


Features

- Acrylic
- 8 color-matched Kohler hydro-massage jets
- Integral apron with removable access panel
- Pump with air switch and grounding-type plug-in cord
- Integral tile flange
- In-line heater
- Left or right drain
- Slotted overflow for maximum bathing depth
- Armrests
- 72" (182.9 cm) x 36" (91.4 cm) x 19" (48.3 cm)

6' (1.8 m) BATH WHIRLPOOL WITH HEATER

K-1124-HL
ALSO K-1124-HR

ADA

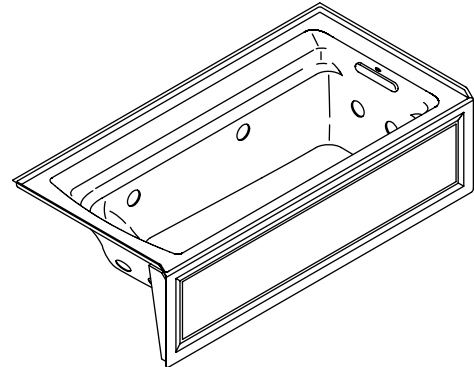

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- ANSI Z124.1.2
- ASME A112.19.7M
- ASTM E162
- ASTM E662
- UL 1795
- State of Massachusetts

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1124-HL	Bath whirlpool with heater and integral apron, left drain	☐ 0	☐ Other_____
K-1124-HR	Bath whirlpool with heater and integral apron, right drain	☐ 0	☐ Other_____
Required Accessories			
K-7271	Clearflo slotted overflow brass bath drain OR	☐ CP	☐ Other_____
K-7272	Clearflo slotted overflow bath drain – PVC pipe	☐ CP	☐ Other_____
Optional Accessories			
K-9529	Removable bath seat	☐ 0	

Product Specification

The acrylic bath whirlpool shall be 72" (182.9 cm) in length, 36" (91.4 cm) in width, and 19" (48.3 cm) in height. Product shall feature 8 color-matched jets and armrests. Product shall feature a pump with air switch and grounding-type cord. Product shall have an in-line heater. Product shall feature an integral apron with removable access panel, and integral tile flange. Product shall be available with left or right drain. Product shall feature a slotted overflow, low threshold height, and integral lumbar support. Bath whirlpool shall be Kohler Model K-1124-_____-_____.

ARCHER™

Technical Information

Fixture*:	
Bathing well	
Basin area, bottom	51-3/8" (130.5 cm) x 21" (53.3 cm)
Basin area, top	64-1/2" (163.8 cm) x 30-1/2" (77.5 cm)
Weight	140 lbs (63.5 kg)
To overflow	
Water depth	15" (38.1 cm)
Capacity	72 gal (273 L)
* Approximate measurements for comparison only.	

Pump:		V	Hz	A
1-speed		120	60	7
Heater:	kW	V	Hz	A
	1.5	120	60	12.5
Pump is supplied with 24" (61 cm) grounding-type plug-in cord.				

Required Electrical Service (2 required)

Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control/Heater	120 V, 15 A, 60 Hz
---------------------	--------------------


Installation Notes

Install this product according to the installation guide.


Floor support under this product must provide for a minimum of 43 lbs/square foot (210 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.


Will comply with **ADA** when installed per Section 607 Bathtubs of the Act.

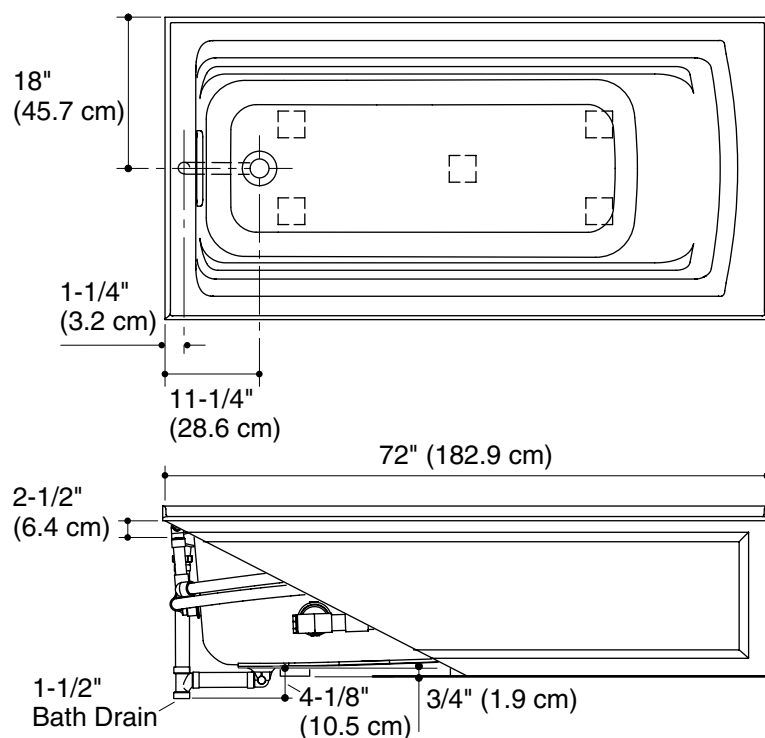

No change in measurements if connected with drain illustrated. (K-7272)



Integral Flange Detail

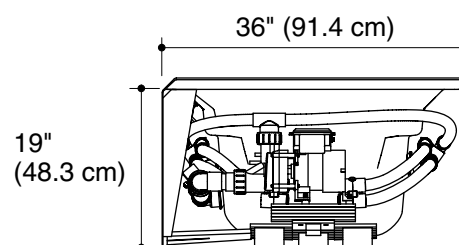

Product Diagram

ARCHER™ 6' (1.8 m) BATH WHIRLPOOL WITH HEATER

Page 2 of 2
1071367-4-E

THE BOLD LOOK
OF **KOHLER**®