

VIBRACOUSTIC™ BATH **K-1143-L** ALSO K-1143-R


Features

- Acrylic
- Left or right drain
- Water overflows into horizontal overflow drain for maximum bathing depth
- Includes remote control
- 21" (533 mm) deep bathing well
- Exposed deck/drop-in style installation
- 4 chromatherapy lights
- 88" (2225 mm) x 48" (1219 mm) x 24" (610 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- CSA B45.0
- CSA B45.5
- ASTM E162
- ASTM E662

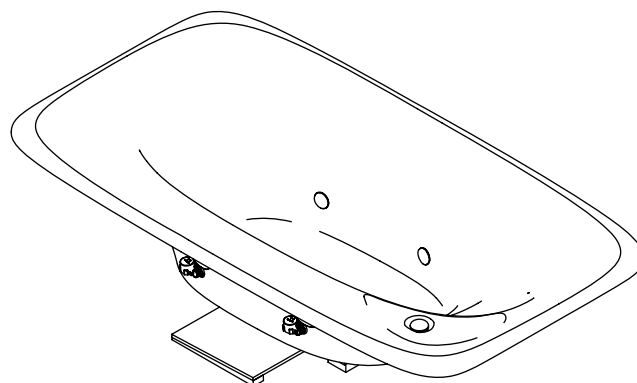

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable
- 1CP: Complements Chrome Finishes
- 1SN: Complements Nickel Finishes
- 1AF: Complements French Gold and Brushed Bronze
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1143-L	VibrAcoustic™ bath – left drain	☐ 0	☐ Other_____
K-1143-R	VibrAcoustic bath – right drain (shown)	☐ 0	☐ Other_____

Required Accessories								
K-175-K	DTV® – Bath media module							☐ NA
K-176	DTV – Bath user interface			☐ 1CP	☐ 1SN	☐ 1AF		
K-7273	Horizontal overflow drain	☐ CP	☐ PB				☐ Other_____	

Product Specification

The acrylic VibrAcoustic bath shall be 88" (2235 mm) in length, 48" (1219 mm) in width, and 24" (610 mm) in height. Product shall be for exposed deck/drop-in style installation. Product shall feature a 21" (533 mm) deep bathing well where water overflows into horizontal overflow drain for maximum bathing depth. Product shall feature a remote control and 4 chromatherapy lights. Product shall be available with left or right drain. VibrAcoustic bath shall be Kohler Model K-1143-____-____.

FOUNTAINHEAD®

Optional Accessories

K-179	Spout adapter kit AND				☐ NA
K-682-K	DTV six-port thermostatic valve				☐ NA
K-922	Laminar bath filler, Ø 13/16" (21 mm) orifice		☐ CP	☐ Other_____	
K-923	Laminar bath filler, Ø 15/16" (24 mm) orifice		☐ CP	☐ Other_____	
K-1601	Footstop	☐ 0		☐ Other_____	
K-8361	Floor-mount bath filler – 35" (889 mm) spout height		☐ CP	☐ Other_____	
K-10609-D	Cable kit				☐ NA

Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	44" (1118 mm) x 24" (610 mm)
Basin area, top	74" (1880 mm) x 32" (813 mm)
Weight	190 lbs (86.2 kg)
To overflow:	
Water depth	21" (533 mm)
Capacity	106 gal (401.3 L)
* Approximate measurements for comparison only.	

Included components:

Cut-out template	K-1143-L	1056277-7, 1056278-7
	K-1143-R	1058098-7, 1058099-7


Installation Notes

Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 38 lbs/square foot (183 kg/square meter) loading.

Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

Unit requires a minimum of two 40 gal (151 L) water heaters.

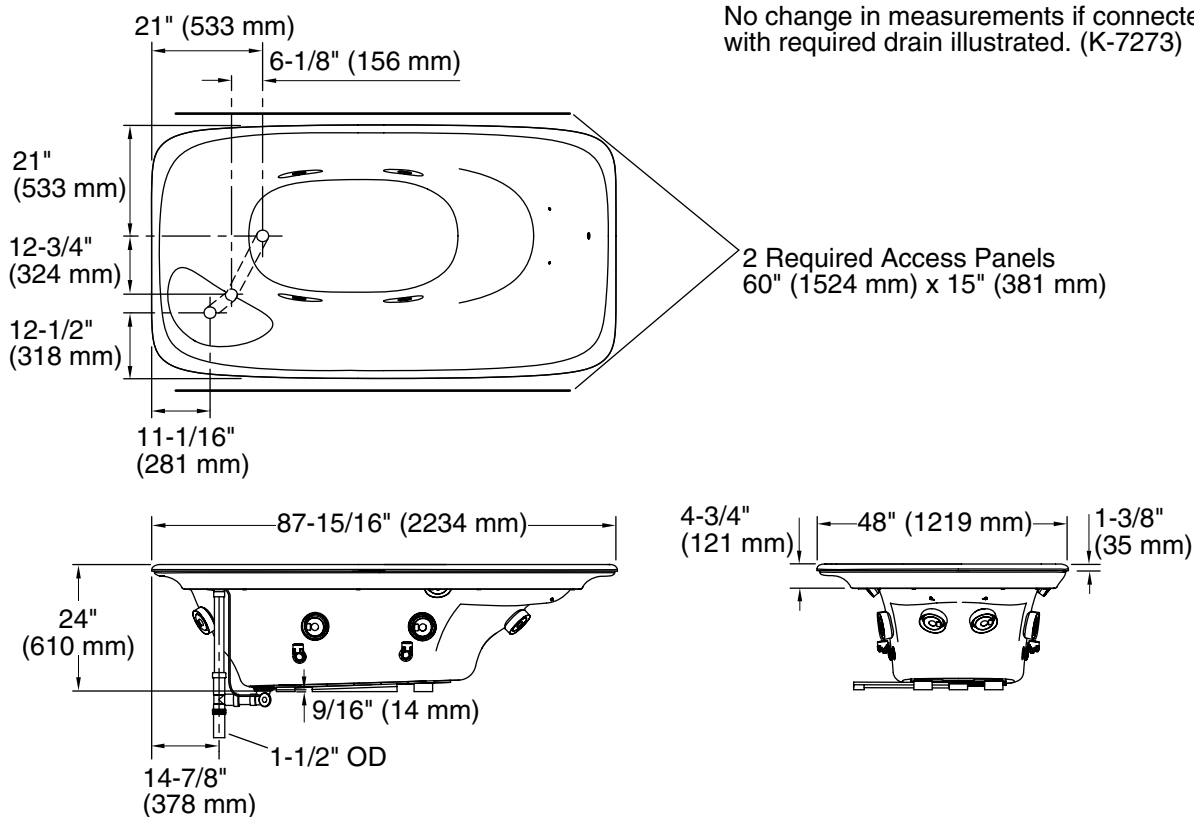

Product Diagram