

## Features


- Metal and carbon fiber construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Flexible connections for easy installation
- Integral sprayhead
- 2" (51 mm) diameter remote joystick valve
- Variable spout reach from less than 2" (51 mm) to over 13" (330 mm)
- For countertop-mount installation
- Meets CalGreen requirements for kitchen faucets
- 1.8 gallons (6.8 L) per minute maximum flow rate at 60 psi (4.1 bar)

## Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ICC/ANSI A117.1
- ASME A112.18.1/CSA B125.1
- NSF 61
- Energy Policy Act of 1992
- All applicable US Federal and State material regulations

## ARTICULATING KITCHEN SINK FAUCET K-6227

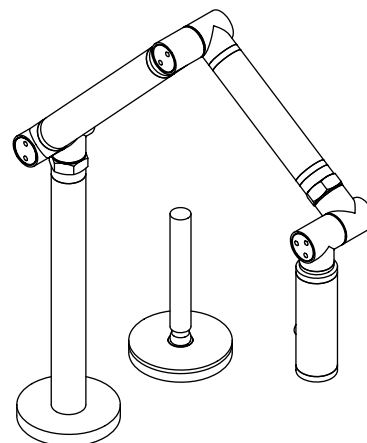**ADA**


## Colors/Finishes

- CP: Polished Chrome
- VS: Stainless Steel
- Other: Refer to Price Book for additional colors/finishes

## Accessories

- NA: None applicable

## Specified Model

| Model      | Description                                       | Colors/Finishes             |                             |                                      |
|------------|---------------------------------------------------|-----------------------------|-----------------------------|--------------------------------------|
| K-6227-C11 | Articulating kitchen sink faucet with silver tube | <input type="checkbox"/> CP | <input type="checkbox"/> VS |                                      |
| K-6227-C12 | Articulating kitchen sink faucet with black tube  | <input type="checkbox"/> CP | <input type="checkbox"/> VS |                                      |
| K-6227-C13 | Articulating kitchen sink faucet with gold tube   |                             |                             | <input type="checkbox"/> Other _____ |
| K-6227-C15 | Articulating kitchen sink faucet with bronze tube |                             |                             | <input type="checkbox"/> Other _____ |

| Optional Accessories |                                                                               |                             |
|----------------------|-------------------------------------------------------------------------------|-----------------------------|
| 1102407              | Deep roughing-in kit                                                          | <input type="checkbox"/> NA |
| 1151265              | Low flow kit - reduces maximum flow to 1.5 gpm (5.7 L) at 60 psi (4.1 bar)    | <input type="checkbox"/> NA |
| 1151266              | High flow kit - increases maximum flow to 2.2 gpm (8.3 L) at 60 psi (4.1 bar) | <input type="checkbox"/> NA |

## Product Specification

The articulating kitchen sink faucet shall be made of metal and carbon fiber construction. Product shall meet CalGreen requirements for kitchen faucets. Product shall have a maximum flow rate of 1.8 gallons (6.8 L) per minute at 60 psi (4.4 bar). Product shall feature a one-piece, self-contained ceramic disc valve, which allows both volume and temperature control. Product shall feature a integral sprayhead and a 2" (51 mm) diameter remote joystick valve. Product shall feature a variable spout reach from less than 2" (51 mm) to over 13" (330 mm). Product shall feature flexible connections for easy installation. Product shall be for a countertop-mount installation. Faucet shall be Kohler Model K-6227-\_\_\_\_-\_\_\_\_.


# KARBON®

## Installation Notes

Install this product according to the installation guide.

**ADA** compliant when installed to the specific requirement of the regulation.

**NOTICE:** Due to the non-standard 2" (51 mm) diameter of the remote valve, the remote valve **cannot** be mounted through a standard 1-3/8" (35 mm) faucet hole of a sink. Choose a sink without faucet holes, then mount the faucet and remote valve through the countertop. Refer to the countertop manufacturer's instructions for proper hole drilling.

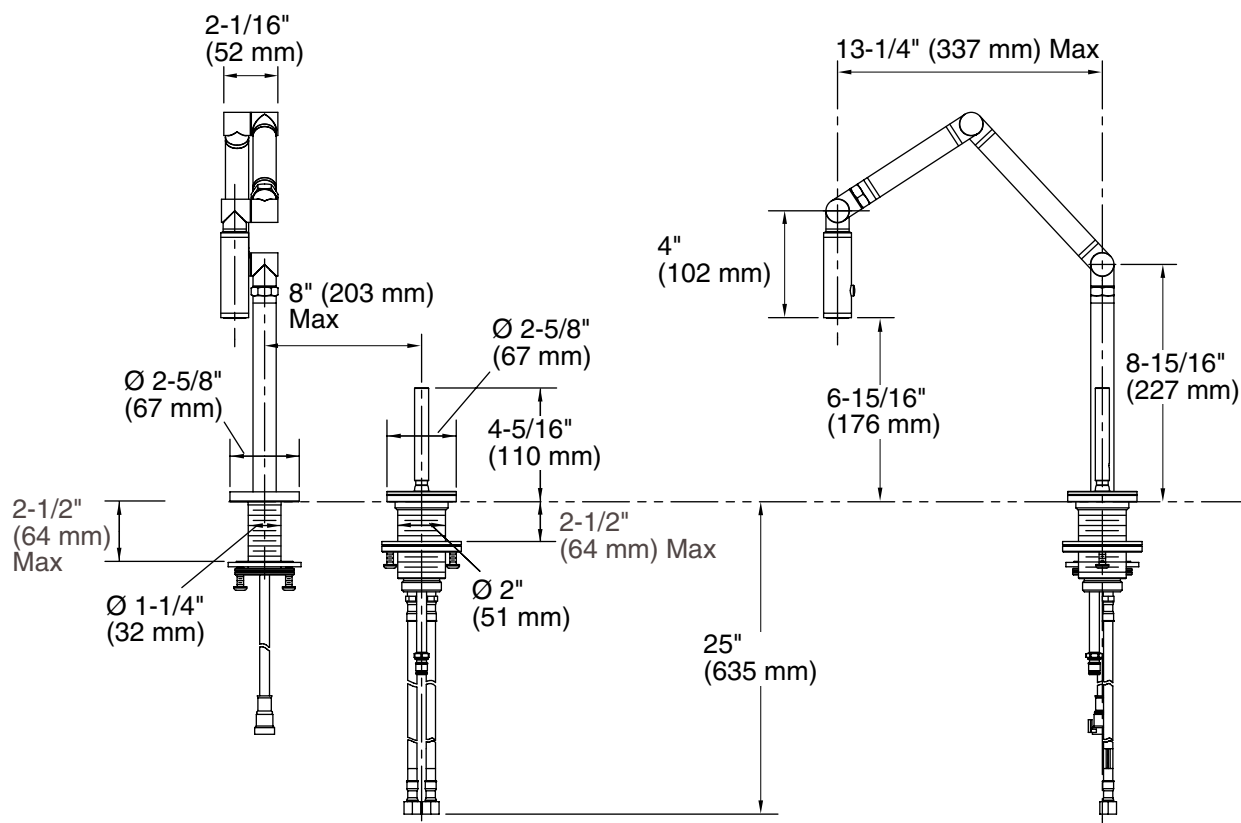

Product Diagram