


PRODUCT MODEL NUMBERS

JES8750BA

JES8850BA

Electrical: This range requires a single-phase three-wire 120/240- or a 120/208-volt, 60-Hz, AC-circuit. Wiring codes require a separate circuit be run from the main entrance panel to the range and that it be equipped with separate disconnect switch and fuses, either in the main entrance panel or in a separate switch and fuse box.

CLEARANCE DIMENSIONS

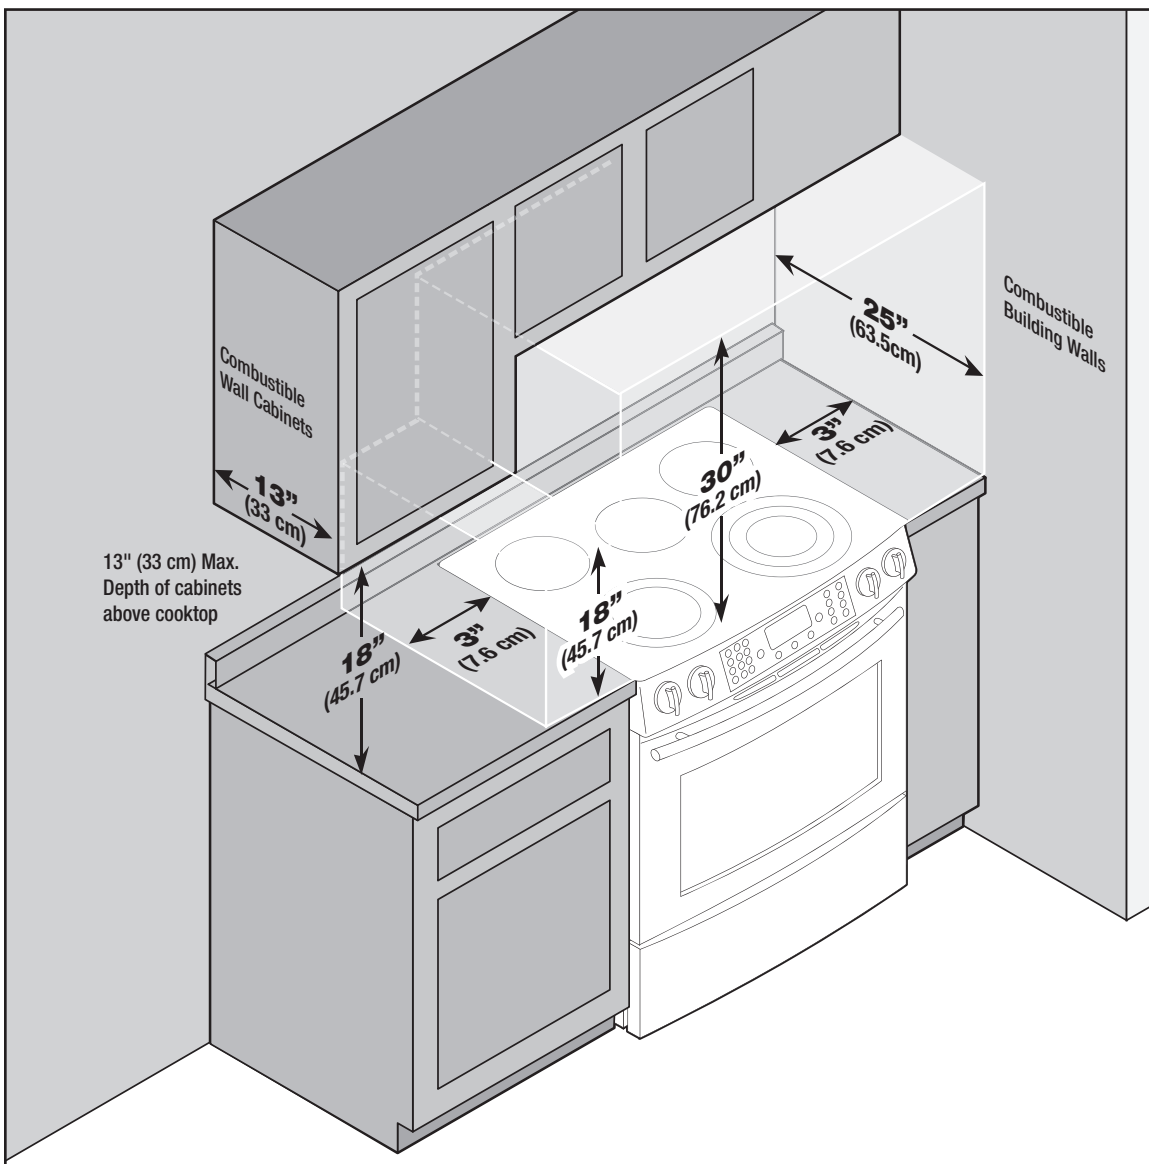



Range may be installed with 0" (0 cm) clearance adjacent to (against) combustible construction at the rear and on the sides below the cooktop.

NOTE: 30" (76.2 cm) dimension between cooking top and wall cabinet shown on illustration does not apply to ranges with an elevated oven or microwave. The installation instructions of the elevated oven will specify the minimum acceptable dimension between the cooktop and elevated oven. The 30" (76.2 cm) dimension may be reduced to not less than 24" (61 cm) when the wall cabinets in a domestic home are protected with fireproof materials in accordance with American National Standards - National Fuel Gas Code or in mobile homes when they are protected with fireproof materials in accordance with the Federal Standard for Mobile Home Construction and Safety.

To eliminate the risk of burns or fire by reaching over heated surface units, cabinet storage space located above the surface units should be avoided. If cabinet storage is to be provided, the risk can be reduced by installing a range hood that projects horizontally a minimum of 5" (13 cm) beyond the bottom of the cabinets.

JENN-AIR® Electric Updraft Range

CABINET OPENING DIMENSIONS

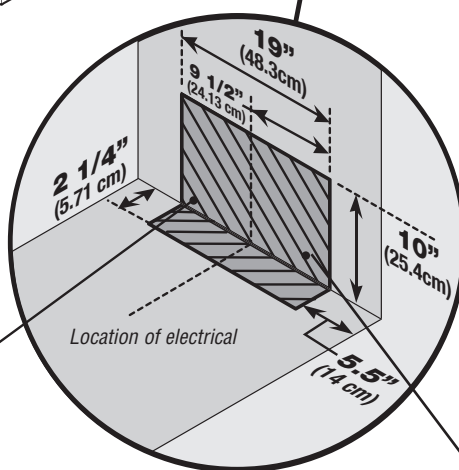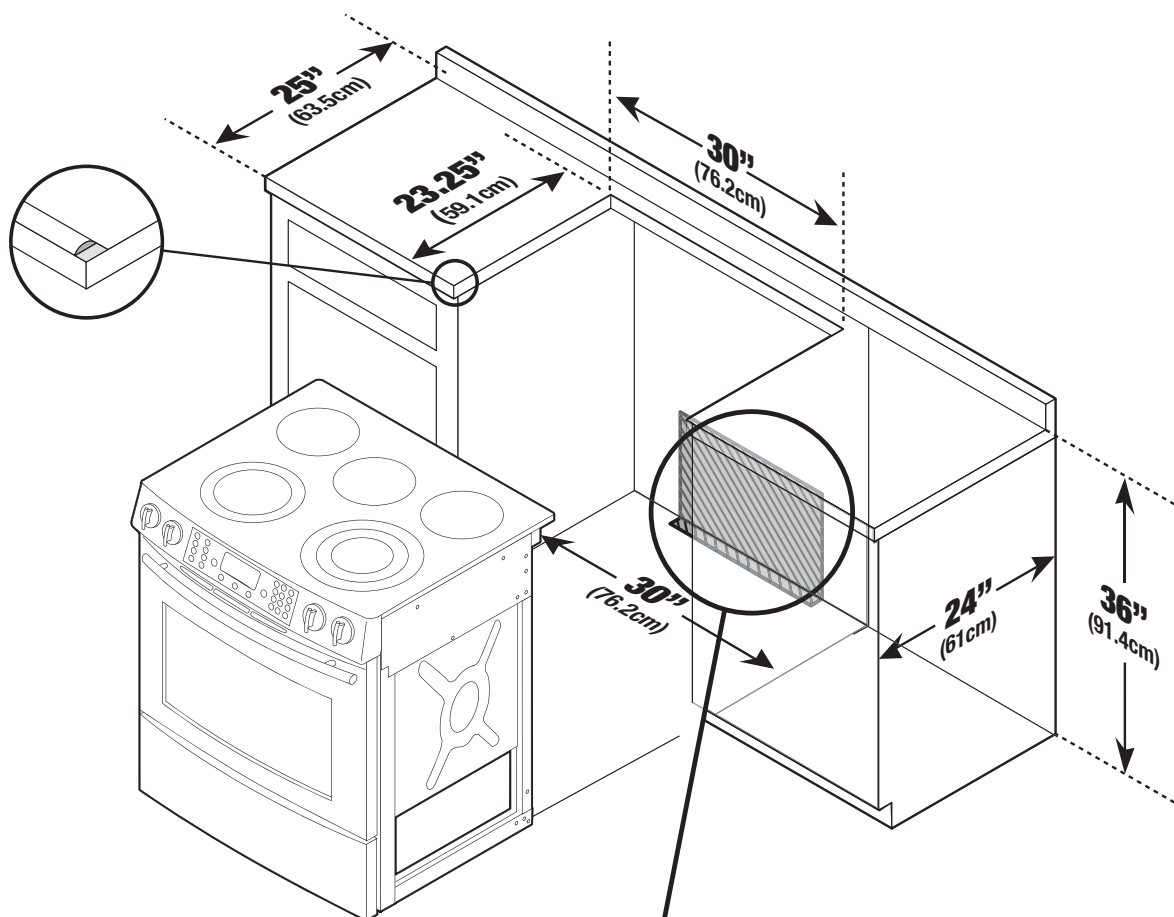

NOTE: For countertops with formed front edge, shave raised section to clear top.

CAUTION: Some white European style cabinets are equipped with delicate white vinyl drawer and door fronts. The vinyl may not be designed to withstand the heat produced by the normal safe operation of a self-clean range. Discoloration or delamination may occur. To avoid possible damage, we recommend increasing the 30" (76.2 cm) cabinet opening to 31-1/4" (79.3 cm) minimum and using heat shield (CABKIT V). The countertop cut-out must remain 30" (76.2 cm).

When replacing an existing unit, a maximum of 23-1/2" (59.7 cm) is acceptable. If the cut depth exceeds 23-1/2" (59.7 cm), use filler kit K71FILL.

120/240 V or 120/208 V grounded electrical outlet in the hatched area. Outlet **MUST** be flush. Nothing located in hatched area can extend more than 2" (5.1 cm) from wall or range will not slide all the way back.

