
BOTTOM-FREEZER REFRIGERATORS

Top View A C D D E

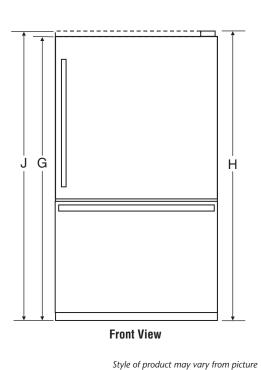

PRODUCT DIMENSIONS

| | INCHES | CENTIMETERS |
|----------------|--------|-------------|
| Α | 29 5/8 | 75.2 |
| B¹ | 32 3/4 | 83.2 |
| С | 28 | 71.1 |
| D^2 | 30 3/4 | 78.1 |
| E_3 | 59 1/4 | 150.5 |
| F ⁴ | 31 3/4 | 80.6 |
| G⁵ | 65 5/8 | 166.7 |
| H^6 | 66 7/8 | 169.9 |
| J^7 | N/A | N/A |

MODEL SKUS PBF1951KEW

NOTES:

- 1. Depth with doors closed, including handle.
- 2. Depth with doors closed, excluding handle.
- 3. Depth with doors open at 90 degrees.
- 4. Width with doors open at 90 degrees, including handles.
- 5. Height to top of refrigerator
- 6. Height to top of refrigerator including door hinge.
- 7. Height to top of refrigerator door trim (if needed for trim models).
- 8. When installing refrigerator in or near a corner, allow enough room for door to open without interfering with cabinet drawers or hardware.

Electrical requirements: Adequately wired individual 120V A/C, 60Hz approved electrical circuit. Use required fuse (15 amp) or comparable circuit breaker.