



### Features:


- Ceramic disc valve cartridge
- Low lead: meets NSF standard 61/Section 9 and Prop 65 lead requirements
- CA AB1953/VT Act 193 Compliant
- 8-1/2" swivel spout
- Spout swivels at 180°
- Pull down spray with metal hose
- Two check valves
- Two-function hand spray

Maximum Flow Rate: 2.2 GPM (8.3L/min)

|                                       | Handle Type | Product Number |
|---------------------------------------|-------------|----------------|
| Single Lever Pull Down Kitchen Faucet | Lever       | 803/840        |



| Available Finishes: | Finish Code |
|---------------------|-------------|
| Polished Chrome     | 100         |
| Old Bronze          | 105         |
| Brushed Nickel      | 144         |
| UltraSteel (PVD)    | 355         |

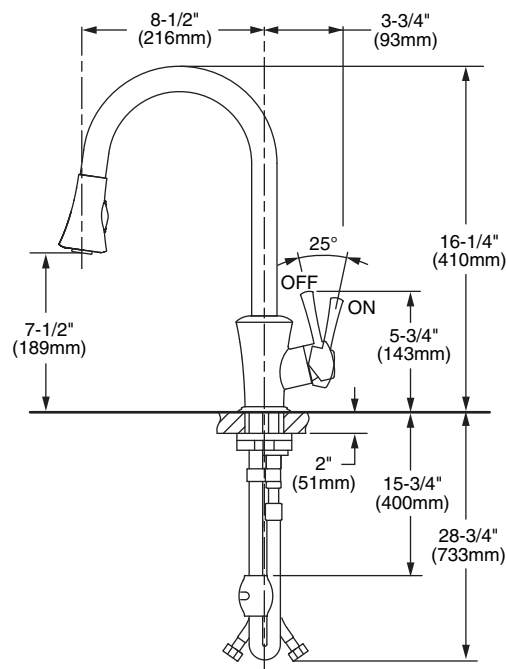

**IMPORTANT:** These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

### CODES & STANDARDS

These products meet and exceed the following codes and standards:

**ASME A112.18.1**

**CSA B125**

**NSF 61/Section 9**



Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

