

Whirlpool® Side by Side Refrigerator

PRODUCT MODEL NUMBERS

GD5DHAXV GS5SVAXV
GS5DHAXV


Electrical: A 115 Volt, 60 Hz., AC only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker.

Reverse osmosis water supply: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).


OVERALL DIMENSIONS

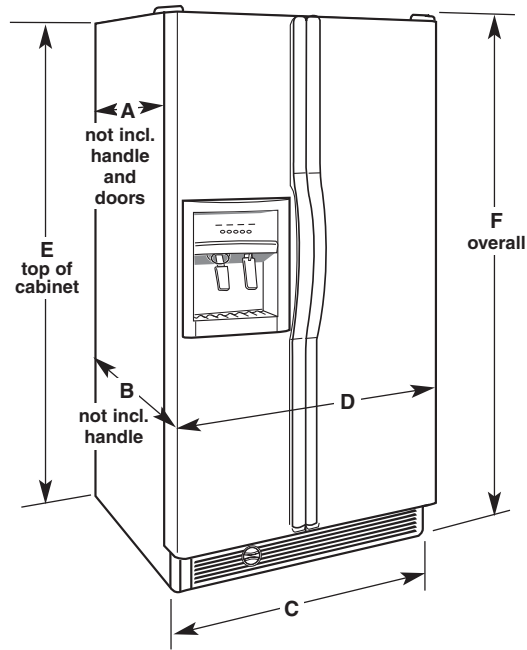

Dimensions "E" and "F" include rollers extended 3/4".

Model	Depth "A"	Depth "B"	Cab. Width "C"	Door Width "D"	Cab. Height "E"	Overall Height "F"
GD5DHAXV	27-1/2"	31-3/8"	35-1/2"	35-7/8"	68-7/8"	69-3/8"
GS5DHAXV	27-1/2"	33-1/4"	35-1/2"	36"	68-7/8"	70-1/4"
GS5SVAXV	27-1/2"	33-1/4"	35-1/2"	36"	68-7/8"	70-1/4"

LOCATION REQUIREMENTS

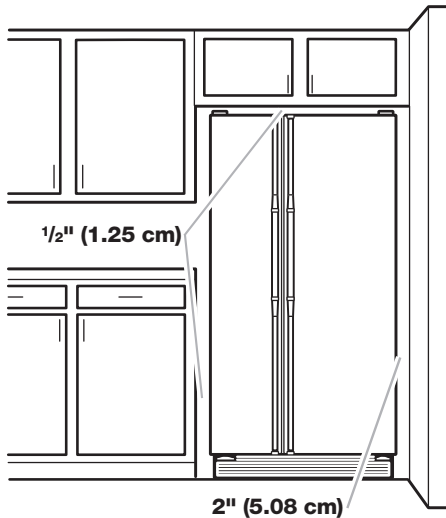

To ensure proper ventilation for your refrigerator, allow for 1/2" (1.25 cm) space on each side and at the top. When installing your refrigerator next to a fixed wall, leave 2" (5.08 cm) minimum on each side (depending on your model) to allow for the door to swing open. If your refrigerator has a water dispenser and ice maker, allow extra space at the back for the water line connections.

NOTE: Do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 55°F (13°C).