



MAYTAG®

French Door Refrigerator

PRODUCT MODEL NUMBERS

MFF2558VE

MFD2562VE


Electrical: A 115 Volt, 60 Hz., AC only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the refrigerator to OFF. Depending on your model, turn the freezer control to the word OFF, or press the freezer down arrow touch pad until a dash (–) appears in both the freezer and refrigerator displays. Disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the temperature controls to the desired setting.

Water: A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker.


IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa). If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the system needs to be a minimum of approximately 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

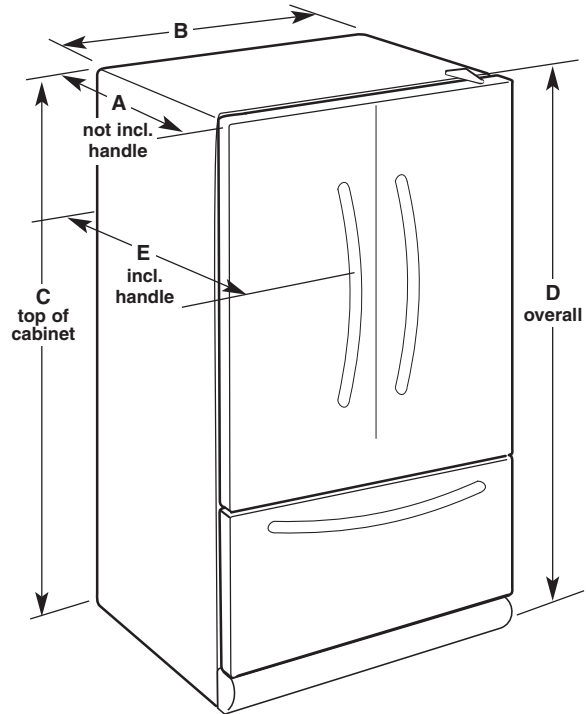

Model #	Depth "A"	Cab. Width "B"	Cab. Height "C"	Overall Height "D"	Depth "E"
MFF2558VE	33"	35-5/8"	68-1/2"	69-15/16"	35-1/2"
MFD2562VE	(83.82 cm)	(90.49 cm)	(174 cm)	(177.64 cm)	(90.17 cm)

LOCATION REQUIREMENTS

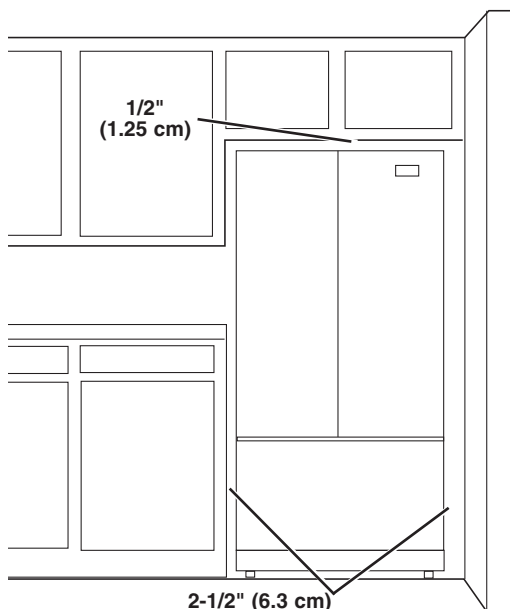

To ensure proper ventilation for your refrigerator, allow for 1/2" (1.25 cm) space at the top and behind the refrigerator. When installing your refrigerator next to a fixed wall, leave 2-1/2" (6.3 cm) minimum on both sides to allow for the doors to swing open. If your refrigerator has an ice maker, allow extra space at the back for the water line connections.

NOTE: Do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will either fall below 55°F (13°C) or rise above 110°F (43°C).