

MAYTAG® Top Mount Refrigerator

PRODUCT MODEL NUMBERS


MTF1842EE	MTB1954EE
MTF1842EE	MTB2254EE
MTF1954EE	MTF2142EE

Electrical: A 115 Volt, 60 Hz., AC only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: Connect the ice maker to a cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa).


If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

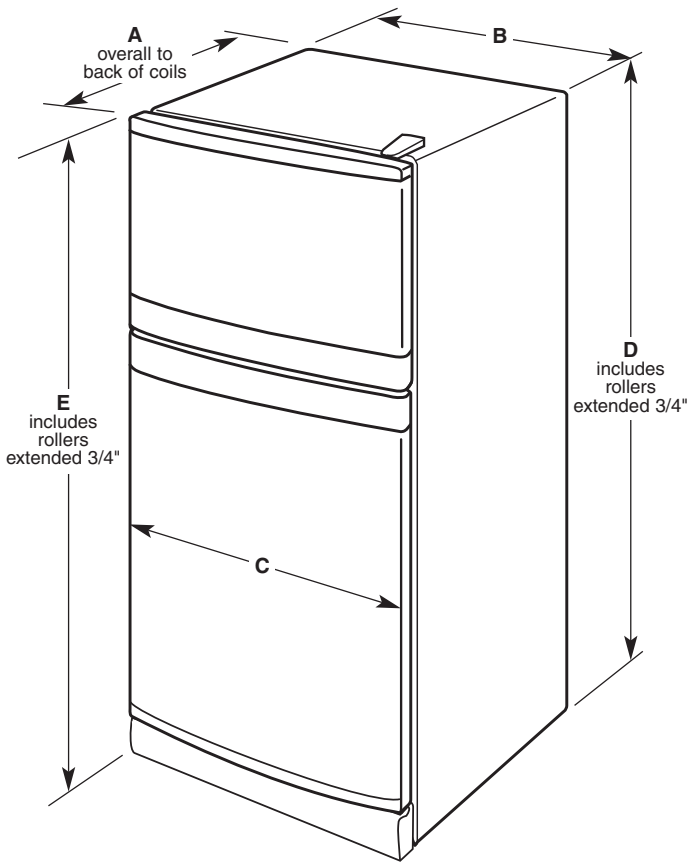

Model Size	Overall Depth A	Cab. Width B	Door Width C	Cab. Height D	Overall Height E
18 cu. ft.	29-3/8" (74.6 cm)	29-1/2" (74.9 cm)	29-3/4" (75.6 cm)	65-1/2" (166.4 cm)	66-1/4" (168.3 cm)
19 cu. ft.	31-1/2" (80.0 cm)	29-1/2" (74.9 cm)	30-1/8" (76.5 cm)	65-1/2" (166.4 cm)	66-1/2" (168.9 cm)
21 cu. ft.	29-3/8" (74.6 cm)	32-1/2" (82.5 cm)	32-3/4" (83.2 cm)	65-1/2" (166.4 cm)	66-1/4" (168.3 cm)
22 cu. ft.	31-1/2" (80.0 cm)	32-1/2" (82.5 cm)	33-1/8" (84.1 cm)	65-1/2" (166.4 cm)	66-1/2" (168.9 cm)

LOCATION REQUIREMENTS

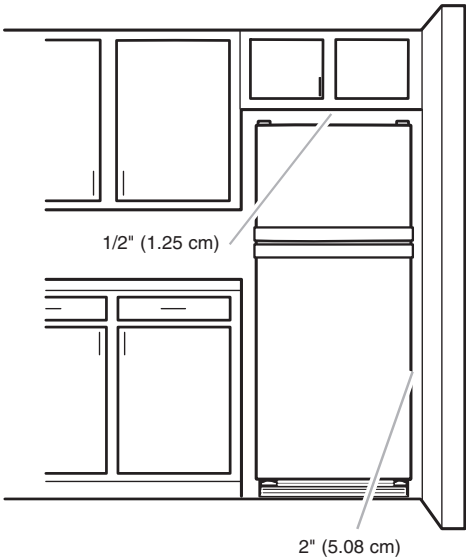

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and the top. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

When installing your refrigerator next to a fixed wall, leave 2" (5.08 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: Do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 55°F (13°C).