

Whirlpool® Side by Side Refrigerator

PRODUCT MODEL NUMBERS

GSC25C4EY
GSC25C5EY

GSC25C6EY
WRS321CDB

Electrical: A 115-Volt, 60-Hz., AC-only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation or cleaning, or removing a light bulb, turn cooling off or turn the Refrigerator or Freezer Control (depending on the model) to OFF, and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and turn cooling on or reset the Refrigerator or Freezer Control (depending on the model) to the desired setting.

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required for the water dispenser and ice maker.

IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

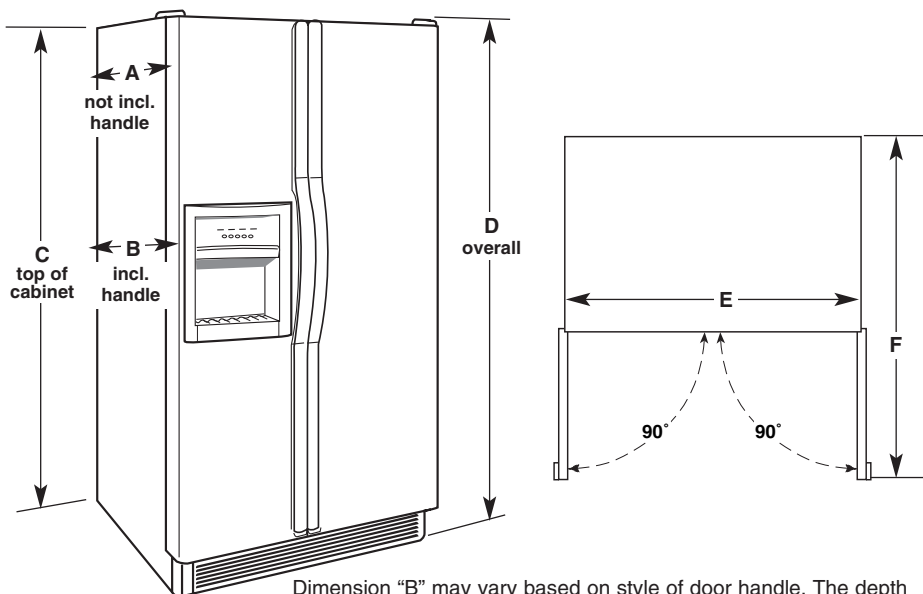


Dimension "B" may vary based on style of door handle. The depth for the largest available handle is listed.

Dimensions "C" and "D" include the leveling legs extended to the minimum height of $\frac{1}{4}$ " (6.35 mm) below the refrigerator. When leveling legs are fully extended to 1" (2.54 cm), add $\frac{3}{4}$ " (19.05 mm).

Door Style	Model Size	Depth "A"	Depth w/Handle "B"	Cab. Height "C"	Overall Height "D"	Cab. Width "E"	Depth "F" with Doors Open 90°
Flat	69"	27 $\frac{1}{2}$ " (69.8 cm)	30" (76.3 cm)	68 $\frac{1}{2}$ " (174.2 cm)	68 $\frac{7}{8}$ " (174.9 cm)	35 $\frac{1}{2}$ " (90.0 cm)	45 $\frac{5}{8}$ " (116.4 cm)
Flat	72"	27 $\frac{1}{2}$ " (69.8 cm)	30" (76.3 cm)	71" (180.2 cm)	71 $\frac{1}{4}$ " (180.9 cm)	35 $\frac{1}{2}$ " (90.0 cm)	45 $\frac{5}{8}$ " (116.4 cm)
Curved	69"	28 $\frac{5}{8}$ " (72.5 cm)	31 $\frac{1}{8}$ " (79.1 cm)	68 $\frac{1}{2}$ " (174.2 cm)	68 $\frac{7}{8}$ " (174.9 cm)	35 $\frac{1}{2}$ " (90.0 cm)	45 $\frac{5}{8}$ " (116.4 cm)
Curved	72"	28 $\frac{5}{8}$ " (72.5 cm)	31 $\frac{1}{8}$ " (79.1 cm)	71" (180.2 cm)	71 $\frac{1}{4}$ " (180.9 cm)	35 $\frac{1}{2}$ " (90.0 cm)	45 $\frac{5}{8}$ " (116.4 cm)

LOCATION REQUIREMENTS

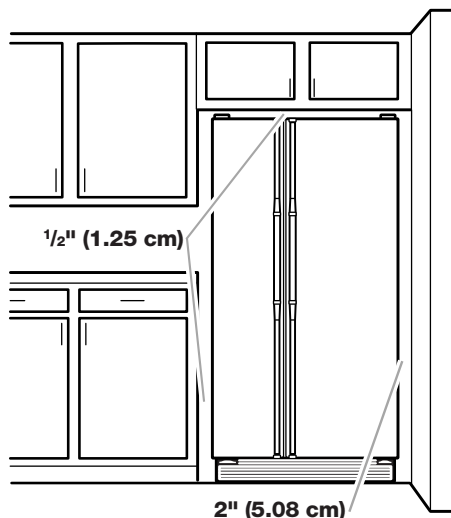

To ensure proper ventilation for your refrigerator, allow for $\frac{1}{2}$ " (1.25 cm) of space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 2" (5.08 cm) minimum space on each side (depending on your model) to allow the doors to swing open.

Normal minimum cabinet cut-out width required for product installation is 36" (91.44 cm). However, if the product is placed against an extended wall and the ability to remove the crisper pans is desired, an additional 18 $\frac{1}{2}$ " (46.99 cm) of cabinet width is required, so a total cabinet opening width of 54 $\frac{1}{2}$ " (138.43 cm) is recommended.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.