

KOHLER®

Roughing-In

K-1221
SEADREAM®
BATH WHIRLPOOL

Product Information

Applicable product:			
Bath whirlpool	K-1221		
Fixture*:			
Bathing well:			
Basin area, bottom	47" (1194 mm) x 37" (940 mm)		
Basin area, top	67" (1702 mm) x 42" (1067 mm)		
Weight	120 lbs (54.4 kg)		
To overflow:			
Water depth	16-7/8" (429 mm)		
Capacity	122 gal (461.8 L)		
* Approximate measurements for comparison only.			
Drop-in cut-out	70-1/4" (1784 mm) x 46-1/4" (1175 mm)		
Pump:	V	Hz	A
1-speed	120	60	7.5

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.	

Installation Notes


Install this product according to the installation guide.

Floor support under this product must provide for a minimum of 49 lbs/square foot (237 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.


The apron must be installed before the finished floor and wall materials are installed.

Fixture conforms to ANSI Standard Z124.1.2. All dimensions are nominal.

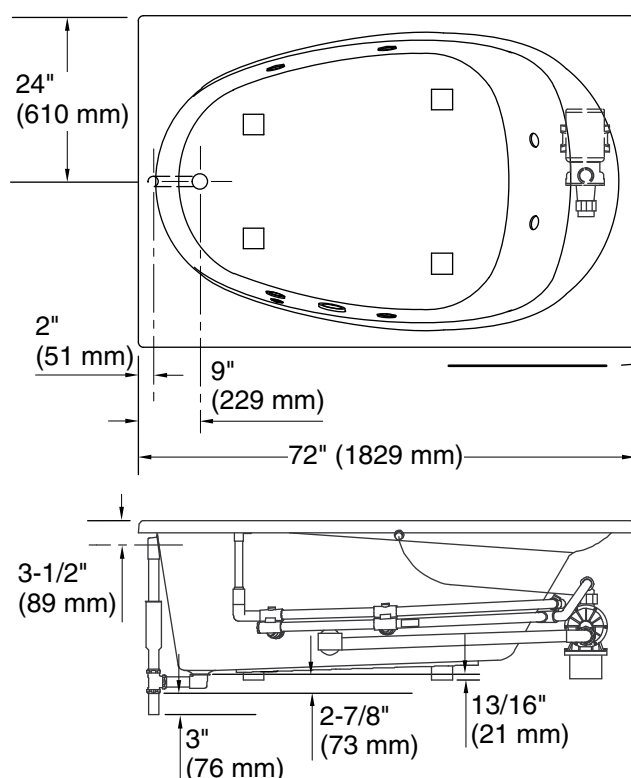

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

Pump/Control Access
 (If Apron Is Not Used)
 20" (508 mm) W x
 15" (381 mm) H



**Drop-in Rim
 Detail**

