

KOHLER® Roughing-In

K-1510-X
HOURGLASS®
BATH

Product Information

Applicable product:	
Bath	K-1510-X
Fixture*:	
Basin area:	
Bathing well	42" (106.7 cm) x 17" (43.2 cm)
Top area	55" (139.7 cm) x 25" (63.5 cm)
To overflow:	
Water depth	12-1/8" (30.8 cm)
Capacity	50 gal (27.2 L)
Weight	60 lbs (27.2 kg)
Drop-in cutout	58-1/2" (148.6 cm) x 28-1/2" (72.4 cm)
* Approximate measurements for comparison only.	
Recommended accessories:	
Pop-up drain	K-7161-AF

Installation Notes

Install this product according to the installation guide.

The apron must be installed before the finished floor and wall materials are installed.


Floor support under bath must provide for a minimum of 47 lbs/square foot (229 kg/square meter) loading.

Will comply with **ADA** when installed per Section 607 Bathtubs of the Act.

Will comply with **CSA B651** when installed per Clause 4.4.7 of the standard.

Will comply with **OBC** when installed per Clause 3.8.3.13.

Fixture conforms to ANSI Standard Z124.1.2. All dimensions are nominal.

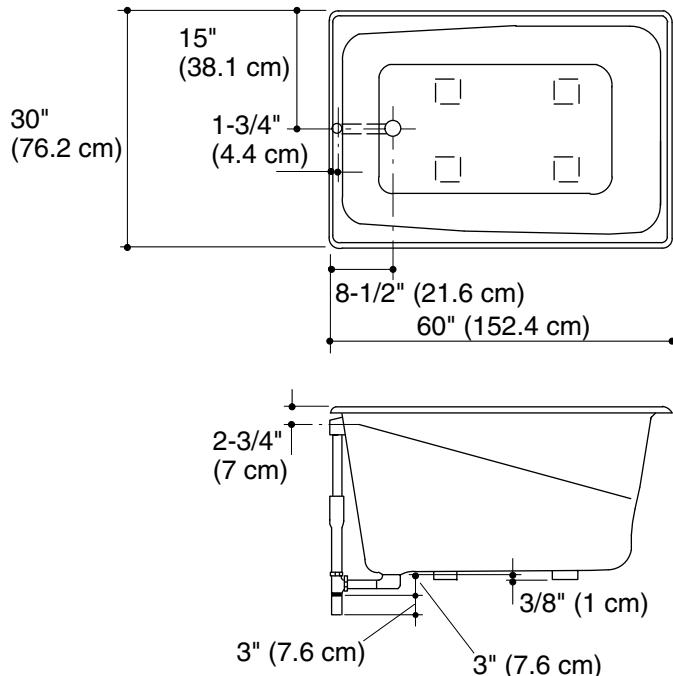

No change in measurements if connected with drain illustrated.

