

KOHLER®

Roughing-In

K-1257, K-1257-L, K-1257-R
MARIPOSA®
BATH WHIRLPOOL

Product Information

Applicable product:	
Bath whirlpool – drop-in	K-1257
Bath whirlpool – 3-side integral flange, left drain	K-1257-L
Bath whirlpool – 3-side integral flange, right drain	K-1257-R

Fixture*:	
Bathing well:	
Basin area, bottom	50" (1270 mm) x 24" (610 mm)
Basin area, top	65" (1651 mm) x 27" (686 mm)
Weight	110 lbs (50 kg)
To overflow:	
Water depth	14" (356 mm)
Capacity	72 gal (272.5 L)
* Approximate measurements for comparison only.	

Drop-in cut-out	70" (1778 mm) x 34" (864 mm)
-----------------	------------------------------

Pump:	V	Hz	A
1-speed	120	60	7.5

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 VAC, 15 A, 60 Hz

Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.

Installation Notes

Install this product according to the installation guide.


Floor support under whirlpool must provide for a minimum of 41 lbs/square foot (200 kg/square meter) loading.

The apron must be installed before the finished floor and wall materials are installed.

If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.


Fixture conforms to ANSI Standard Z124.1.2. All dimensions are nominal.

Pump/Control Access (If Apron Is Not Used):
 20" (508 mm) W x 15" (381 mm) H

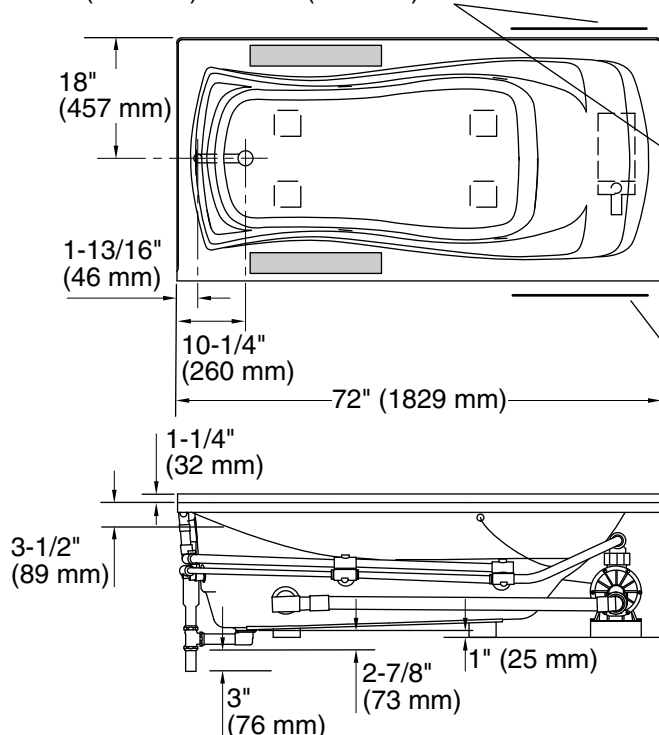


No change in measurements if connected with drain illustrated. (K-11677 or K-11677M)

Recommended Faucet Area



Integral Flange Detail



Drop-In Rim Detail

Pump/Control Access
 (If Apron Is Not Used):
 20" (508 mm) W x
 15" (381 mm) H

