

# KOHLER®

## Roughing-In

## K-1257-LA, K-1257-RA MARIPOSA® BATH WHIRLPOOL WITH INTEGRAL APRON

### Product Information

|  |           |
|--|-----------|
| Applicable products:                             |           |
| Bath whirlpool with integral apron – left drain  | K-1257-LA |
| Bath whirlpool with integral apron – right drain | K-1257-RA |

|   |                              |
|---|------------------------------|
| Fixture*:                                       |                              |
| Bathing well:                                   |                              |
| Basin area, bottom                              | 50" (1270 mm) x 24" (610 mm) |
| Basin area, top                                 | 65" (1651 mm) x 27" (686 mm) |
| Weight  | 110 lbs (49.9 kg)            |
| To overflow:                                    |                              |
| Water depth                                     | 14" (356 mm)                 |
| Capacity  | 72 gal (272.5 L)             |
| * Approximate measurements for comparison only. |                              |

|         |     |    |     |
|---------|-----|----|-----|
| Pump:   | V   | Hz | A   |
| 1-speed | 120 | 60 | 7.5 |

### Required Electrical Service

|   |                      |
|---|----------------------|
| Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI): |                      |
| Pump/control  | 120 VAC, 15 A, 60 Hz |
| Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.                 |                      |


### Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 41 lbs/square foot (200 kg/square meter) loading.


If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

Fixture conforms to ANSI Standard Z124.1.2. All dimensions are nominal.

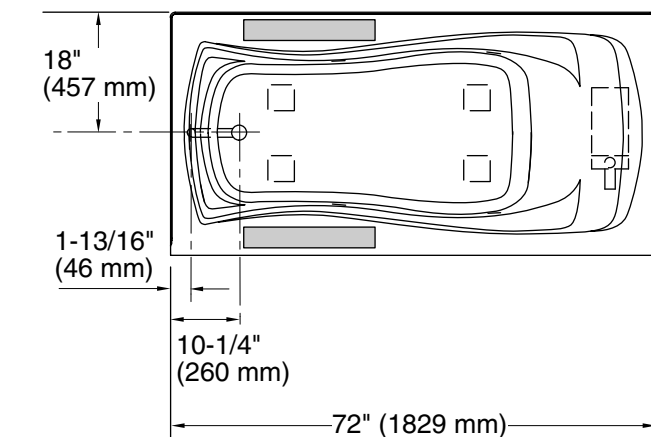

No change in measurements if connected with drain illustrated. (K-11677 or K-11677M)

Recommended Faucet Area



Integral Flange Detail

