

### Product Information

Applicable product:	
Bath whirlpool with integral apron and heater – left drain	K-1239-HL
Bath whirlpool with integral apron and heater – right drain	K-1239-HR

Fixture*:	
Bathing well:	
Basin area, bottom	46" (1168 mm) x 24" (610 mm)
Basin area, top	54" (1372 mm) x 27" (686 mm)
Weight	110 lbs (49.9 kg)
To overflow:	
Water depth	14" (356 mm)
Capacity	63 gal (238.5 L)
* Approximate measurements for comparison only.	

Pump:		V	Hz	A
1-speed		120	60	7.5
Heater:	Kw	V	Hz	A
	1.5	120	60	12.5

### Required Electrical Service

Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Heater	120 V, 15 A, 60 Hz
Locate the outlets behind the whirlpool and within 24" (610 mm) of the pump and heater.	

### Installation Notes

Install this product according to the installation guide.



Floor support under whirlpool must provide for a minimum of 44 lbs/square foot (215 kg/square meter) loading.

If installing a rim-mount faucet, make sure there is no interference with the drain overflow and circulating system before drilling any holes. If installing a spout on the faucet deck, consult local and national codes for minimum air gap requirements.

Fixture conforms to CSA B45.5/IAPMO Z124. All dimensions are nominal.

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

Recommended Faucet Area

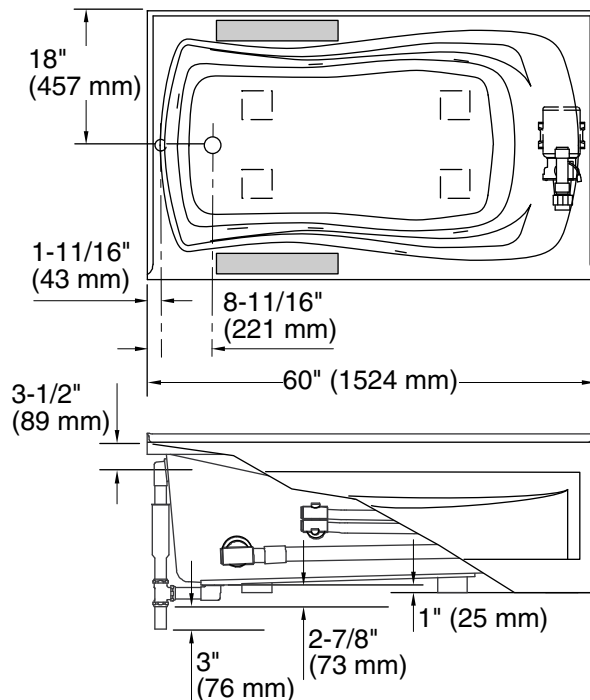

Integral Flange Detail

