

Product Information

Applicable product:			
5' custom bath whirlpool – drop-in			K-1337-CN
Fixture*:			
Basin area:			
Bathing well	42" (1067 mm) x 28" (711 mm)		
Top area	55" (1397 mm) x 40" (1016 mm)		
Weight	110 lbs (49.9 kg)		
To overflow:			
Water depth	15-1/2" (394 mm)		
Capacity	73 gal (276.3 L)		
* Approximate measurements for comparison only.			
Included components:			
Cut-out template			1017044-7
Pump:	V	Hz	A
1-speed	120	60	7.5
Minimum access panel (required):			
Pump/control	20" (508 mm) W x 15" (381 mm) H		

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 15 A, 60 Hz


Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.

Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 42 lbs/square foot (206 kg/square meter) loading.

Fixture conforms to CSA B45.5/IAPMO Z124. All dimensions are nominal.

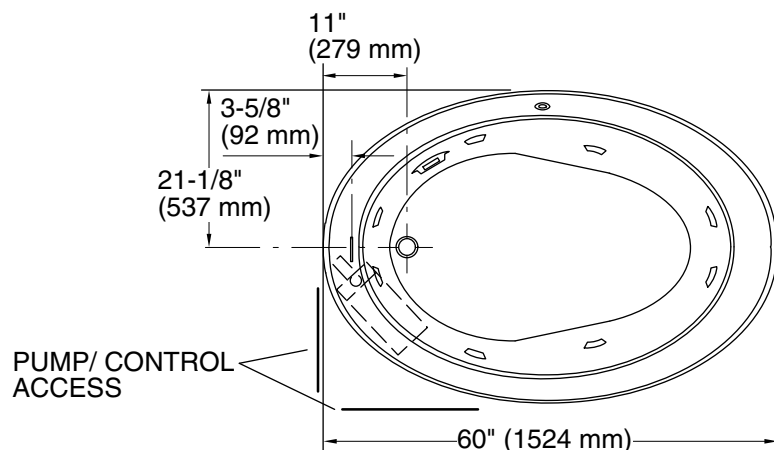

No change in measurements if connected with drain illustrated (K-7166-AF)

