

Product Information

Applicable product:	
Bath whirlpool, custom pump	K-792-HB
Bath whirlpool, custom pump	K-792-HE
Bath whirlpool, custom pump	K-792-HJ

Fixture*:	
Basin area	43" (1092 mm) x 19" (483 mm)
Top area	54" (1372 mm) x 30" (762 mm)
Weight	420 lbs (190.5 kg)
Water depth	15" (381 mm) to overflow
Capacity	62 gal (234.7 L)
*Approximate measurements for comparison only.	

Drop-in cut-out	58-1/2" (1486 mm) x 34-1/2" (876 mm)
Cut-out for undermount	K-584 template

Pump	kW	V	A*
	1.5	240	11
* Approximate measurements for comparison only.			

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Pump/control	208-240 V, 20 A, 50/60 Hz
--------------	---------------------------

Installation Notes

Install this product according to the installation guide.

Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.


Floor support under whirlpool must provide for a minimum of 65 lbs/square foot (314 kg/square meter) loading.

Pump must be relocated to custom position at the time of the installation. Provide adequate clearance.

Fixture conforms to ASME A112.19.1/CSA B45.2. All dimensions are nominal.

K-792-HB

Pump/Control Access
34" (864 mm) W x
15" (381 mm) H

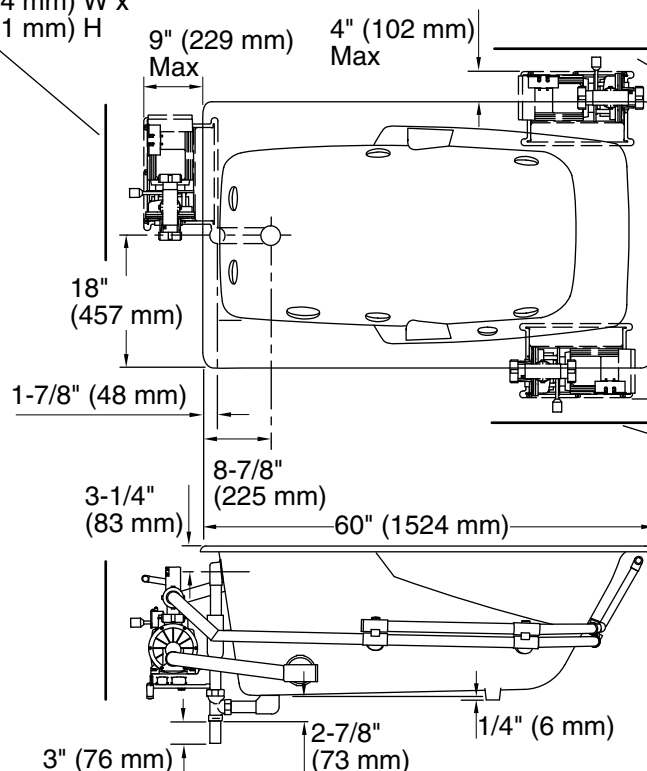

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

K-792-HE

Pump/Control Access
34" (864 mm) W x 15" (381 mm) H

K-792-HJ

Pump/Control Access
34" (864 mm) W x 15" (381 mm) H

