

KOHLER®

Roughing-In

K-513-H2, K-514-H2, K-783-H2, K-784-H2
MENDOTA™/GUARDIAN™
BATH WHIRLPOOL

Product Information

Applicable products:	
Bath whirlpool – less grab bars, left drain	K-513-H2
Bath whirlpool – less grab bars, right drain	K-514-H2
Bath whirlpool – grab bars, left drain	K-783-H2
Bath whirlpool – grab bars, right drain	K-784-H2
Bath whirlpool is ADA compliant when installed with a seat at head end.	

Fixture*:	
Bathing well:	
Basin area, bottom	46" (1168 mm) x 20" (508 mm)
Basin area, top	53-3/4" (1365 mm) x 24" (610 mm)
Weight	460 lbs (208.7 kg)
To overflow:	
Water depth	10-3/4" (273 mm)
Capacity	45 gal (170.3 L)
* Approximate measurements for comparison only.	

Pump:	kW	V	A
	1.5	240	11

Minimum access panel pump/control:	
32" (813 mm) W x 15" (381 mm) H	required

Required accessories:	
4-jet trim kit	K-9694
Grab bars (pair) – required for K-783/84-H2	K-9620

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):	
Pump/control	208-240 V, 20 A, 50/60 Hz

Installation Notes

NOTE: Pump protrusion beyond rim.


Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 65 lbs/square foot (315 kg/square meter) loading.

Fixture conforms to ASME A112.19.1/CSA B45.2. All dimensions are nominal.

No change in measurements if connected with drain illustrated. (K-7160-TF or K-7160M-TF)

K-783-H2

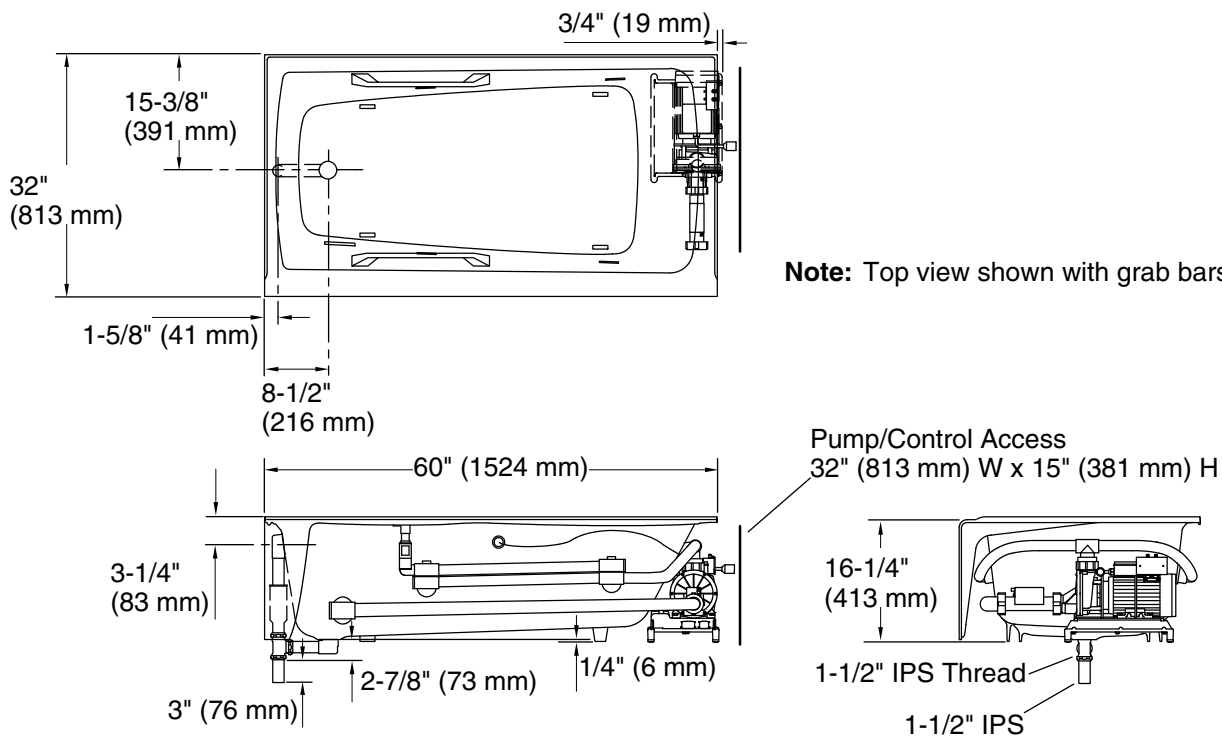

MENDOTA™/GUARDIAN™ BATH WHIRLPOOL
1019457-1-F

KOHLER®