

KOHLER®

Roughing-In

K-1357-HL, K-1357-HR DEVONSHIRE® BATH WHIRLPOOL WITH HEATER

Product Information

Applicable products:	
Bath whirlpool with heater – left drain and integral apron	K-1357-HL
Bath whirlpool with heater – right drain and integral apron	K-1357-HR

Fixture*:	
Bathing well:	
Basin area, bottom	42" (1067 mm) x 20" (508 mm)
Basin area, top	51" (1295 mm) x 24" (610 mm)
Weight	160 lbs (72.6 kg)
To overflow:	
Water depth	14" (356 mm)
Capacity	60 gal (227.1 L)
* Approximate measurements for comparison only.	

Pump:		V	Hz	A
1-speed		120	60	7
Heater:	kW	V	Hz	A
	1.5	120	60	12.5

Required Electrical Service

Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control	120 V, 15A, 60 Hz
--------------	-------------------

Heater	120 V, 15A, 60 Hz
--------	-------------------

Locate the outlets behind the whirlpool and within 24" (610 mm) of the pump and heater.

Installation Notes



Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 51 lbs/square foot (251 kg/square meter) loading.

Fixture conforms to ANSI Standard Z124.1.2. All dimensions are nominal.

K-1357-HL

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

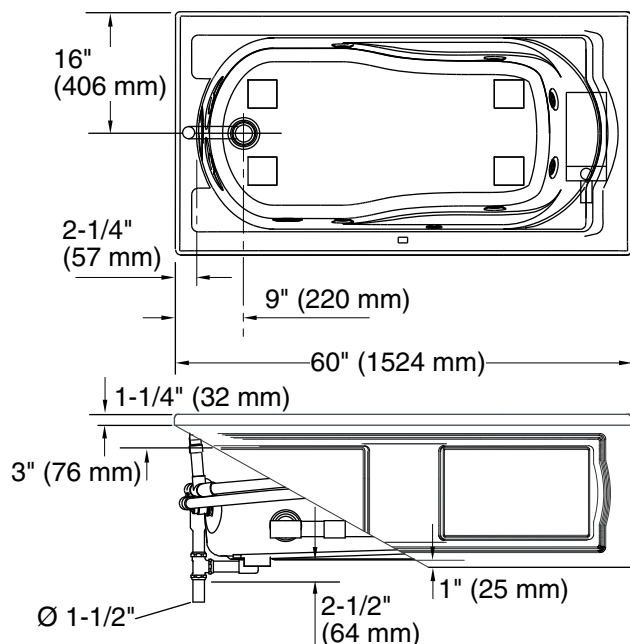

Integral Flange Detail

