

KOHLER® Roughing-In

K-1697, K-1716 STEAM GENERATOR

Product Information

Applicable product:	
26 kW Fast-Response® steam generator (qty of 2, 13 kW each)	K-1697
30 kW Fast-Response® steam generator (qty of 2, 15 kW each)	K-1716

Water and drain requirements:	
Water supply	3/8" line, 3/8" NPT female thread
Steam line	1/2" copper line 1/2" NPT female thread
Pressure relief valve	3/4" NPT male thread, valve supplied
Generator Weight Total:	26 kW, 30 kW = 64 lbs (29 kg)

Generator Electrical Rating		
K-1697 (qty of 2, 13 kW each)	26 kW	240 V, 59 A, 50/60 Hz
K-1716 (qty of 2, 15 kW each)	30 kW	240 V, 68 A, 50/60 Hz

Required Electrical Service

Dedicated circuit required for each generator:	
Steam generator K-1697	240 V, 80 A, 50/60 Hz
Steam generator K-1716	240 V, 90 A, 50/60 Hz

Installation Notes


Install this product according to the installation guide.

Fixture dimensions are nominal.

For this steam generator, enclosure shall not exceed the maximum rating volume.

To determine the appropriate model for your installation, determine the cubic feet of your steam area by multiplying L x W x H. Compare the total to chart in the specification sheet and use the closest match. Always round up. For every foot of ceiling height over 8' (2.45 m) use the next larger steam unit.

Steam generator model	Power Rating	Max Volume Rating
K-1697	26 kW	894 cu. ft. (25 cu. m)
K-1716	30 kW	1000 cu. ft. (28 cu. m)

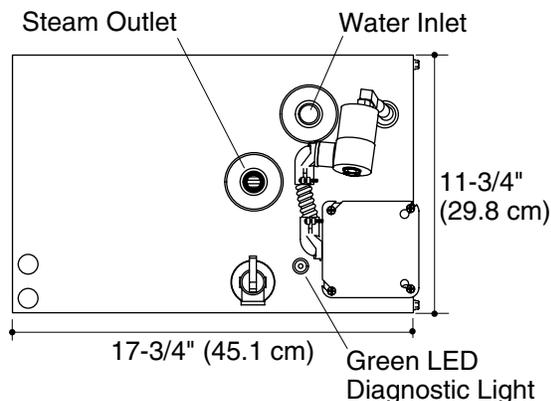

Minimum required access is 24" (61 cm) L x 15" (38.1 cm) H.

Allow for a minimum of 12" (30.5 cm) of space around all sides of the steam generator.

