

KOHLER®

Roughing-In

K-809-HE, K-809-HN
KATHRYN®
5.5' BATH WHIRLPOOL

Product Information

Applicable products:	
5.5' bath whirlpool, custom pump location	K-809-HE
5.5' bath whirlpool, custom pump location	K-809-HN

Fixture*:	
Bathing well:	
Basin area	45" (1143 mm) x 25" (635 mm)
Top area	58" (1473 mm) x 29" (737 mm)
Weight	510 lbs (231.3 kg)
To overflow:	
Water depth	17-3/4" (451 mm)
Capacity	97 gal (365.2 L)
* Approximate measurements for comparison only.	

Pump	kW	V	Hz	A*
	1.5	240	50/60	11
* Approximate measurements for comparison only.				

Cut-out template:	
Drop-in	64-1/2" (1638 mm) x 34-1/2" (876 mm)
Undermount	K-587

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Pump/control 208-240 V, 20 A, 50/60 Hz

Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 82 lbs/square foot (398 kg/square meter) loading.


The required access panel must be a minimum of 34" (864 mm) in width and 15" (381 mm) in height.

Cast iron bath whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing the bath to a deck.

Hot water supply should be 70% of capacity or greater. Installations will vary.

The pump must be relocated to the custom location at the time of installation. Provide adequate clearance.

Fixture conforms to ASME A112.19.1/CSA B45.2. All dimensions are nominal.

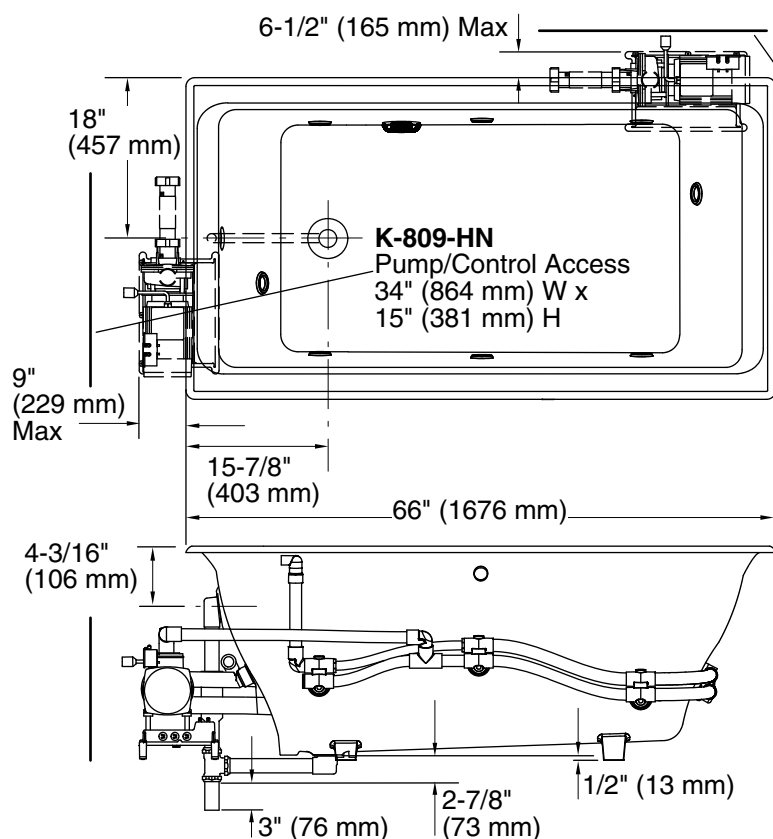

No change in measurements if connected with drain illustrated. (K-7145 or K-7145M)

K-809-HE
 Pump/Control Access
 34" (864 mm) W x 15" (381 mm) H

