

INSTALLATION INSTRUCTION FOR 8815-65,8910-65

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .

Carefully unpack your new fixture and lay out all the parts on a clear area. Make sure not to misplace any small parts necessary for installation.

ASSEMBLING THE FIXTURE (Fig.2)

1. Return the ten arms to suitable position, see figure 2.
2. Attach the fixture assembly (B) to the fixture body (J), and attach the loop (A) to the fixture assembly (B) by turning it clockwise until tight.
3. Hook the end of chain (C) to the loop on the column of the fixture assembly (B) and the arms of the fixture body (J).
4. Attach the finial (L) to bottom of the fixture body (J).
5. Place the socket sleeve (I) and the harp (G) over the socket of the fixture body (J), then lock it securely with the check ring (H). Install the light bulb and put the glass shade (F) on to the harp (G), then screw the finial (E) onto the glass shade (F). NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!
6. Adsorb the magnet of crystal (D) to the center of the finial (E).
7. Attach the crystal (K) to the fixture assembly (B), the fixture body (J) and the finial (L).

HANGING THE FIXTURE (Fig.1)

IMPORTANT: For a safe and secure installation, this fixture must be installed by means of support that is independent of the outlet box.

SUGGESTED INSTALLATION:

1. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old crossbar.
2. Provide a 1/4" IPS pipe with one end securely mounted to a beam or a structural member. The other end should protrude through the center of the outlet box as shown.
3. Assemble the ceiling loop, nipple, nuts and hickey to center 1/4" IPS support pipe and adjust overall length to allow the lock collar to hold the canopy flush to the ceiling. When the adjustments have been completed, secure the three (3) hex nuts, as shown.
4. Attach the chain to the fixture loop. Slip the lock collar, canopy and fixture body over the upper end of the chain. Open the end link of the chain and lift the fixture to attach to the ceiling loop and secure the link.
5. Lace the fixture wires, ground wire and safety cable through the chain and loop, exiting through the side of hickey. Run the safety cable through the top of the outlet box and secure to structural member.
6. Attach the crystal to the small ring of the fixture body.

CONNECTING THE WIRES (Fig.3)

1. At this point, connect the electrical wires as shown in Fig.3 making sure all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise connect fixture's ground wire directly to the junction box.
2. Tuck these wire connections neatly into the ceiling junction box.
3. Raise the lock collar and thread onto ceiling loop protruding through canopy.

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1

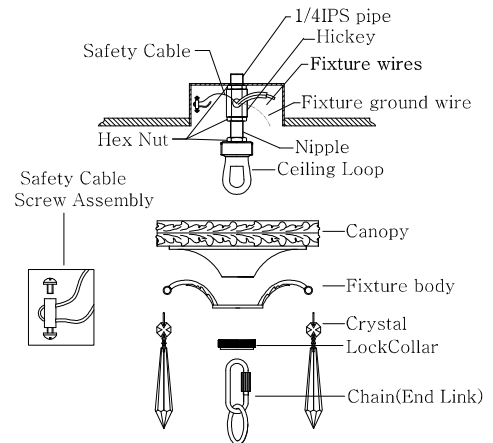


Fig.2


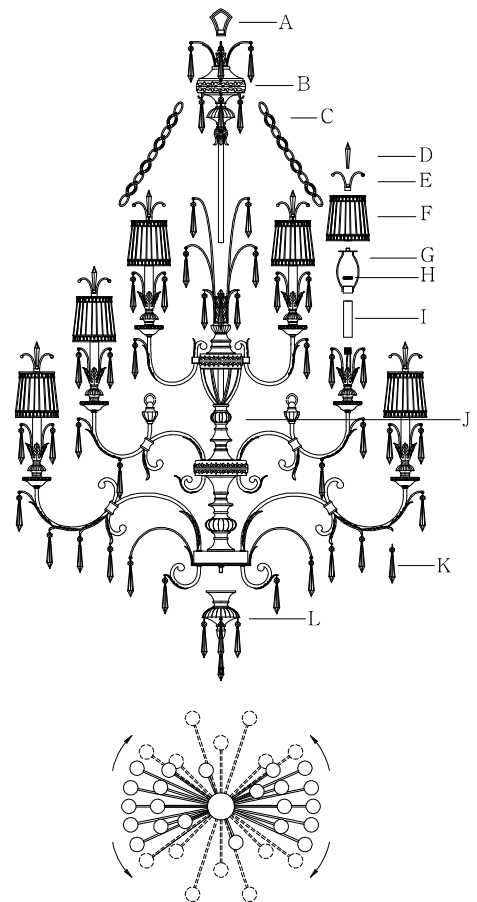


Fig.3

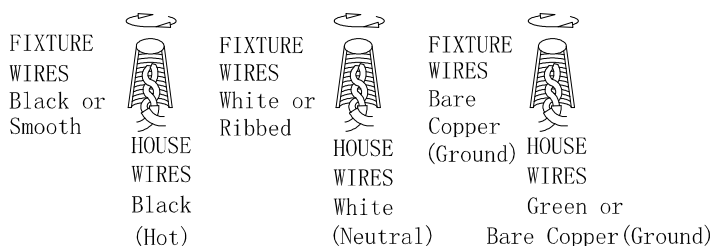

UL
Listed

Livex Lighting