CHANDELIER FIXTURE INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code(N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.


Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

- 1. Thread Nipple (17) with Hex nut to Connector (18), and thread Nipple (20) with Hext nut to Connector(19), then screw Finial(21) to fixture.
- Screw the Loop (16) to the fixture.
 Screw the Nipple(8) with the Hext I
- Screw the Nipple(8) with the Hext Nut (13) and Key washer (12) to the Mounting Bar Collar Loop (10) to the Nipple (8). (6) Attach Mounting Bar (6) to the Outlet Box(1) by the Mounting Screw(7). Screw the
- 4 Link the Chain (15) onto the fixture, slide the Collar Ring (11) and Canopy (9) through the Chain. Link the other end of chain to the Collar Loop (10). Weave the fixture wire and ground wire through the chain to the Outlex box.
- Pull out the outlet wire and ground wire from the Outlet Box. Make wire connections: —Ribbed wire(w/o marking) from light to White Wire(2) from power source.
- --Smooth wire(w/ marking) from light to Black Wire(3) from power source.
- --Loop the Ground Wire(4) to Cross Bar(6) with a Green Screw(14).
- 6. Put the Canopy (9) against the Outlet box, secure with the Collar ring (11).
- 7. Put the Glass Shade (23) onto Glass holder (25) through Socket (22), then fix with Socket ring(21).
- 8.Install bulbs:(bulbs not included)

(Please don't exceed the maximum capacity that recommended on the Sockets).

INSTALLATION IS NOW COMPLETED.

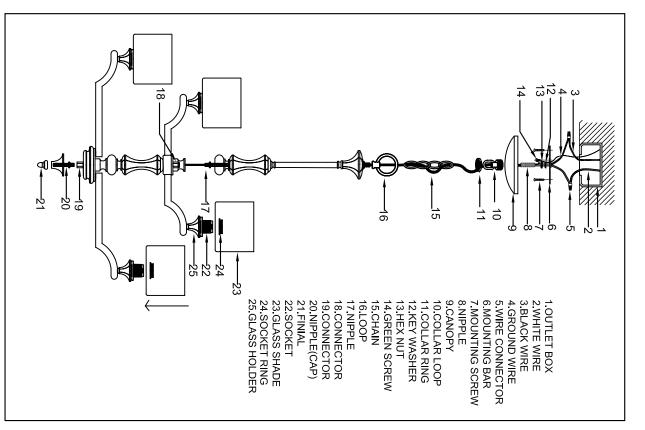

FOR ITEM 2000-9