

INSTALLATION AND SAFETY INSTRUCTIONS HC-538

FOR YOUR SAFETY

WARNING: BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS TURNED OFF; EITHER THE FUSE REMOVED OR THE CIRCUIT BREAKER SET AT OFF.

READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE INSTALLING FIXTURE.

This fixture must be installed outdoors in accordance with the National Electrical Code and local regulations. Retain these instructions supplied with transformer for cable connection.

ASSEMBLY

1. Break off wire way knockout on fixture to run the fixture cable surface.
2. Install lamp (not included).
3. Adjust socket position (if desired). Secure screw in the back of deck light housing.

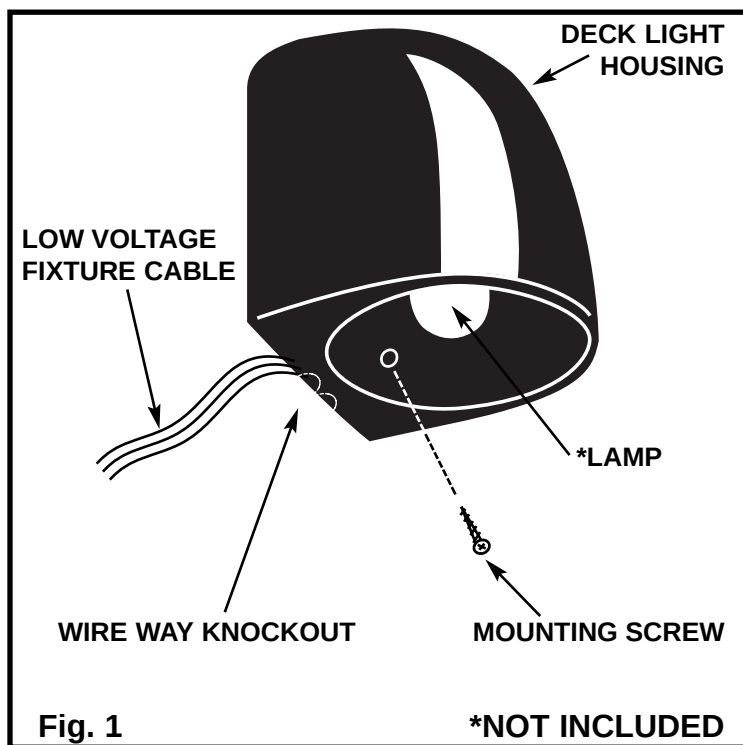


Fig. 1

*NOT INCLUDED

FINAL INSTALLATION

1. Install deck light housing to surface with supplied mounting screw.
2. Attach fixture cable to main supply cable with connector (#9477) (supplied) or use silicone filled wire nuts (#9386) (not included).

NOTE:

The supplied connector works with maximum 12/2 Ambiance landscape cable. To connect this well light to 10/2 Ambiance cable, silicone wire nuts (#9386) should be used.

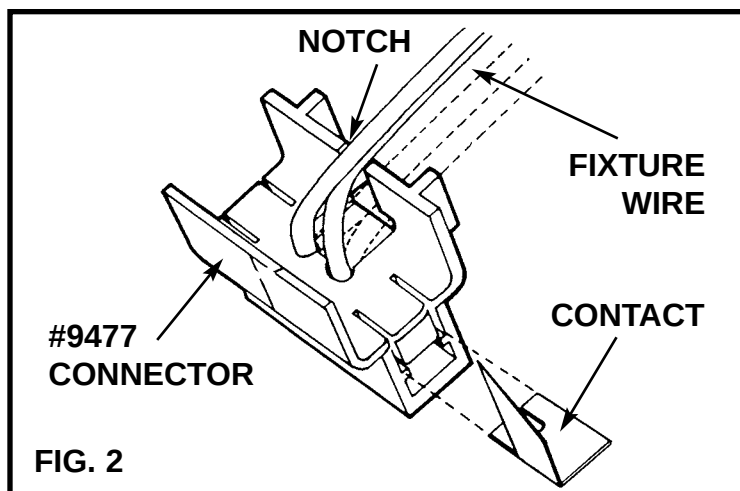


FIG. 2

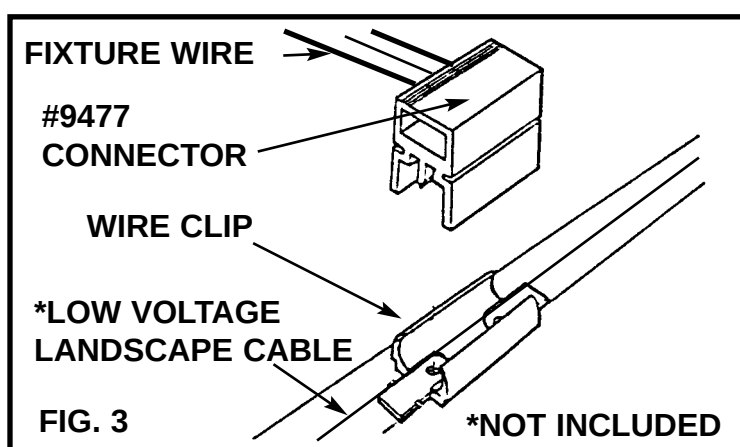


FIG. 3

*NOT INCLUDED

INSTALLATION OF (9477) CONNECTOR

CONNECTOR HAS MAX. 50W AT 12V (OUTDOOR)

1. Cut the fixture wire to desired length.
2. Split ends of wire about (1/2") and insert each end of the wire as far as possible into the plug. Do not strip any insulation off the wire.
3. Insert contact into one end of plug and press or use pliers until contact is flush with plug. Repeat with other contact (see Fig. 2)
4. Twist wires sideways, insert into notch in plug and twist back straight.
5. Snap landscape clip under the low voltage supply cable.
6. Snap plug on to clip and cable (Fig. 3).



Installation And Safety Instruction HC-538 042701

Line art shown may not exactly match the fixture enclosed. However, the installation instructions do apply to this fixture.

Fill In Item Number On Carton And
File This Sheet For Fixture Reference. ITEM# _____