



#### 48" Gas Slide-In Cooktop Specifications

- Product Weight – 190 Lbs.
- Voltage Rating – 120V / 60 Hz / 15 Amp.
- Connected Load – 0.25 Amps (0.03 kW)
- Always consult local and/or national electric and gas codes.
- Cooktop ships with 3/4" factory regulator.
- Lp conversion kit supplied.
- Cabinet and/or countertop must completely enclose recessed portion of cooktop. Respect cutout dimensions and clearances and insure that all contact surfaces are solid and level.
- Plan installation to have electrical connection, gas shutoff valve, and pressure regulator accessible from front of cabinet. (Refer to electrical specifications in Product Installation Guide on web.)
- Allow 2-1/2" minimum clearance between rear edge of cooktop and nearest combustible surface above countertop. If required clearance can not be maintained, then optional stainless steel backsplash or noncombustible backsplash material must be used – otherwise installation will require custom cabinet and countertop dimensions.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Allow 30" minimum clearance between top of cooktop and bottom of unprotected wood or metal overhead cabinetry.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than maximum width of appliance.
- Allow 10" minimum clearance from edge of cooktop to nearest combustible wall on either side of unit.
- Allow 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/8" flame-retardant millboard covered with not less than No. 28 MGS sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Gas Slide-In Cooktop model E48GC76EPS is NOT approved to be used over any Electrolux ICON™ Single Wall Oven.

NOTE: Refer to Product Installation Guide for detailed instructions on the web at [electroluxusa.com](http://electroluxusa.com).

#### Six Burners, Continuous Grates

Designed for cooking multiple dishes at varying temperatures on a single cooktop. Continuous grates spread weight over a broad area providing an ultrastable cook surface.

#### Vantage Flame™

The automatic re-ignition feature allows the ignitors to spark spontaneously should the flame go out or become severely distorted by a draft, providing ease-of-mind while cooking.

#### Sealed Cooktop Spill-Basin

Cleanup is convenient with a black porcelain-coated area beneath the burners to catch spills.

#### Professional-Style Controls

Large professional-feel, front-mounted control knobs provide easy and accurate settings. 270 degree rotation offers superior flame control.

#### Included Accessories

##### Griddle

Heavy-duty, cast iron griddle is durable and ideal for cooking numerous foods simultaneously.

##### Simmer Plate

Coated with a porcelain matte finish, it is used with the simmer setting to help distribute heat evenly to the bottom of the cooking utensil.

##### Wok Ring

Round black matte porcelain wok ring is strong and rigid to help stabilize a cooking wok on the gas cooktop's surface.

#### 48" GAS SLIDE-IN COOKTOP

Cooktop Size	48"
Configuration	6 Sealed Burners

#### FEATURES

Formed Stainless Steel Platform	Yes
Large Professional Skirted Knobs with Bezel	6
Sealed Power Burner™ – 17,000 BTU	2
Sealed Burner – 15,000 BTU	2
Sealed Precision Burner™ – 8,500 - 850 BTU	2
Linear Flow Burner Valves	6
Electronic Ignition with Auto Re-Ignition	Yes
Continuous Grates	3


#### ACCESSORIES

Griddle	Included
Wok Ring	Included
Simmer Plate	Included
9" Backsplash – ACCBG09-48SI	Optional
Black Gas Valve Knob – 318313302	Optional
Black Oven Temperature Knob – 318365501	Optional
Black Oven Selector Knob – 318365601	Optional

#### SPECIFICATIONS

Cutout Dimensions –	
Height	7 3/4"
Width	46" (back) 48" (front)
Depth	24"
Gas Inlet / Power Supply Location	Right Rear
LP Conversion Kit	Included
Voltage Rating	120V / 15 Amp
Electrical Cable	Included
Approved for Single Oven Combination Installation	No
Product Weight	190 Lbs.
Shipping Weight	200 Lbs.
UPC (0-12505-)	53955-8

NOTE: Always consult local and/or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at [electroluxusa.com](http://electroluxusa.com).

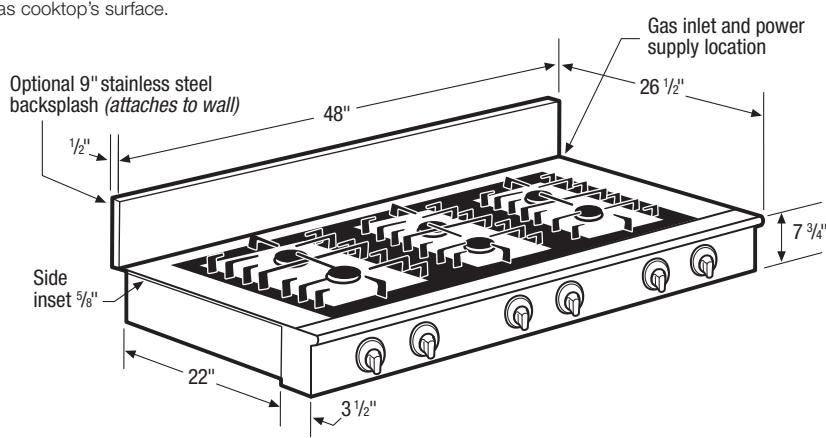

 **The Electrolux Group**

USA • 250 Bobby Jones Expressway • Augusta, GA 30907  
1-877-4electrolux (1-877-435-3287) • [electroluxusa.com](http://electroluxusa.com)

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4  
1-800-668-4606 • [electroluxca.com](http://electroluxca.com)

High standards of quality at Electrolux Major Appliances mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.