



36" Electric Touch-Control Drop-In Cooktop Specifications

- Product Weight – 50 Lbs.
- Connected Load (kW Rating) – 240/208 Volts = 10.5 kW / 7.9 kW
- Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz, fused on both sides of line with ground.
- Amps @ 240/208 Volts = 44.0 / 38.0 Amps
- Recommended Circuit Breaker – 50 Amps
- Always consult local and/or national electric codes.
- Allow 2" space below armoured cable opening to clear electrical cable and allow space for installation of junction box on wall at back of cooktop.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Allow 30" minimum clearance between top of cooktop and bottom of unprotected wood or metal overhead cabinetry.
- The absolute minimum horizontal distance between overhead cabinets installed to either side of the appliance must be no less than the maximum width of the appliance.
- Allow 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/8" flame-retardant millboard covered with not less than No. 28 MGS sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.
- Allow 1-1/2" minimum clearance between rear edge of cutout and nearest combustible surface above countertop.
- Allow 7-1/2" minimum clearance from edge of cooktop to nearest combustible wall on either side of unit.
- It is recommended that drawers not be used beneath cooktop.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.

NOTE: Refer to Product Installation Guide for detailed instructions on the web at electroluxusa.com.

Expandable, Flexible Element Configuration

Five Concentric rings in double and triple elements expand to fit a variety of pan sizes for added cooking flexibility.

Ceramic Smoothtop Glass

Glass cooktop is flat, smooth and easy to clean and maintain.

Electronic Touch-Controls

The smooth cooktop surface is undisturbed with knobs for a look that is sleek and flush with your countertop.



Hot Surface Indicator

For added safety, when an element is still hot, a blue LED indicator will stay on until surface cools.

36" ELECTRIC TOUCH-CONTROL DROP-IN COOKTOP

Configuration	5 Electric Elements
FEATURES	
Black Ceramic Glass Surface	Yes
6" Element – 1200W	2
5" to 7" to 9" Element – 1000W / 1800W / 2700W	2
9" to 12" Element – 1700W / 2700W	1
Precision Touch-Controls	Yes
ACCESSORIES	
Griddle	Optional
SPECIFICATIONS	
Cutout Dimensions –	
Height	5"
Width	35-7/8" min. 36" max.
Depth	20-1/8" min. 20-1/4" max.
Power Cable Location	Middle
Amps @ 240/208 Volts	44.0 / 38.0 Amps
Connected Load Rating - 240/208 Volts	10.5 kW / 7.9 kW
Electrical – Single phase 3- or 4-wire cable, 120/240 V or 120/208 V, 60 Hz, fused on both sides of line with ground.	Required
Armored Electrical Cable	Included
Product Weight	50 Lbs.
Shipping Weight	56 Lbs.
UPC (0-57112-)	09486-1

NOTE: Always consult local and/or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxusa.com.

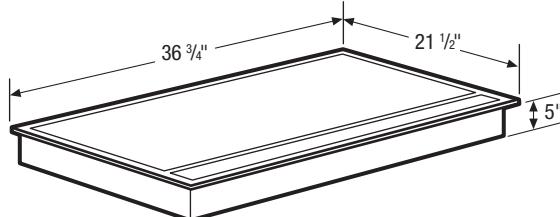

USA • 250 Bobby Jones Expressway • Augusta, GA 30907
1-877-4electrolux (1-877-435-3287) • electroluxusa.com

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4
1-800-668-4606 • electroluxca.com

High standards of quality at Electrolux Major Appliances mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.