




PORTES™

LP8293** 52" Ceiling Fan

LP8293LBN Lowes Item #451821

LP8293LAZ Lowes Item #464465

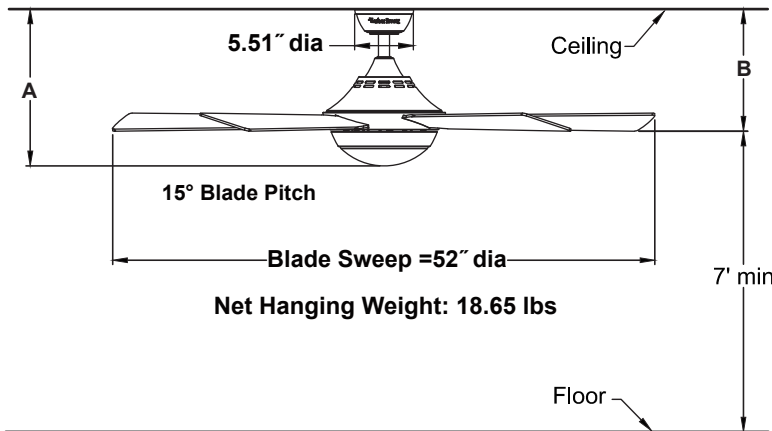

	A	B
Fan w/4.5" downrod	14.80"	11.46"
Fan w/12" downrod	22.30"	18.96"
Fan w/18" downrod	28.30"	24.96"
Fan w/24" downrod	34.30"	30.96"
Fan w/36" downrod	46.30"	42.96"
Fan w/48" downrod	58.30"	54.96"
Fan w/60" downrod	70.30"	66.96"
Fan w/72" downrod	82.30"	78.96"

Available Finishes

Fan / Housing Assembly		Blades
AZ	Aged Bronze	Cherry/Dark Walnut Blade with Opal Frosted Glass
BN	Brushed Nickel	

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

DC 177 sensorless DC motor is designed for optimal performance with this fan.

BLADES:

A set of five 22" reversible plywood blades is included.

CONTROL OPTIONS:

TR17 hand-held DC fan remote control is included. Push button remote control has 6 fan speeds, infinite light levels, reverse, walk away light delay, home shield, sleep timer and off button.

LIGHTING OPTIONS:

One 100-watt minican bulb included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Optional close-to-ceiling kit is available as well—sold separately. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only.

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
I	50	1751	1167	0.03	2
II	72	2697	899	0.05	3
III	98	3208	563	0.09	6
IV	125	4112	374	0.16	11
V	147	4787	266	0.27	18
VI	170	6455	208	0.43	31

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
20	3886	6	193

Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
minican	100	1	1600	2750	99%