


L008006-W4BG

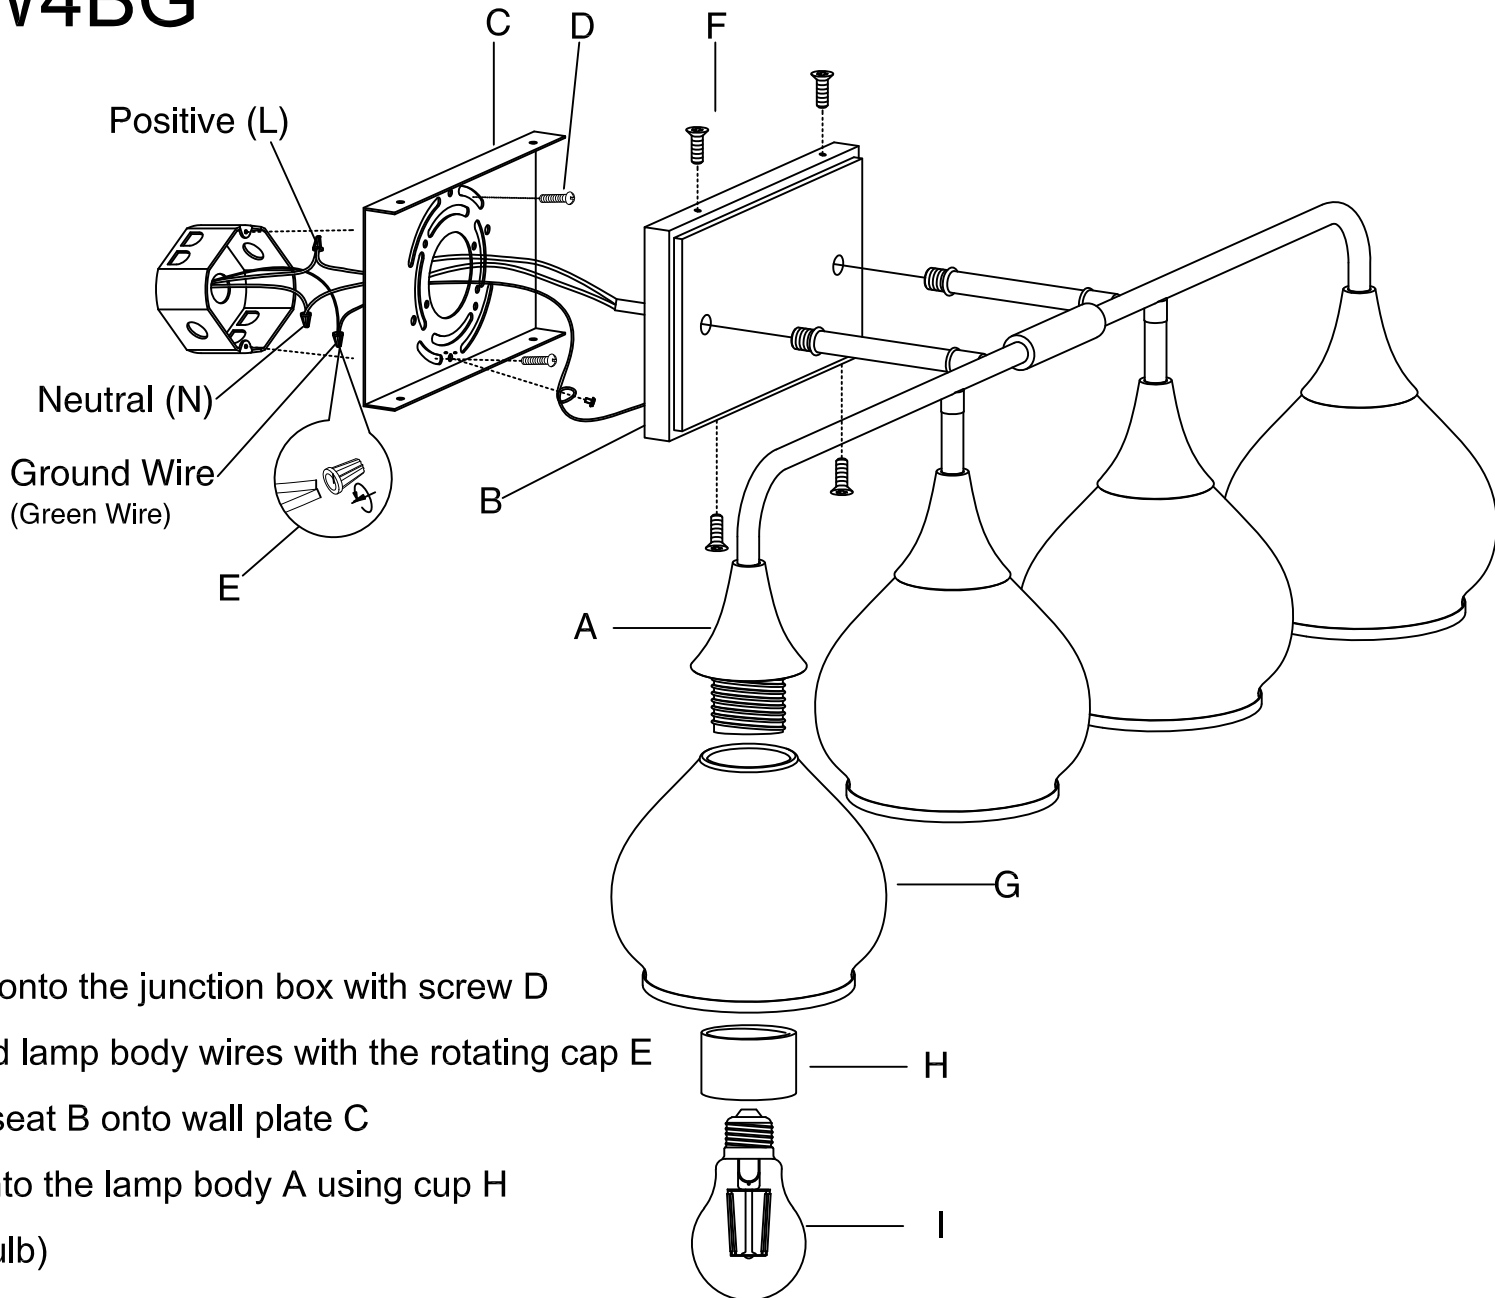

- 1: Lock the hanging plate C onto the junction box with screw D
- 2: Connect the main line and lamp body wires with the rotating cap E
- 3: Use screw F to lock wall seat B onto wall plate C
- 4: Lock the lampshade G onto the lamp body A using cup H
- 5: Install bulb I (excluding bulb)