

# GREATWELL

## ROG400 Installation Tips

1. Prior to the installation, inspect the package and make sure all parts are included.



1 x System with all 3 stage filters pre-installed



1 x RO faucet




1 x Feed water adapter



4 x Color-coded 1/4" tubing



1 x Drain saddle



1 x Installation and Maintenance Manual

2. Follow the step by step instructions on **PAGE 15** of the enclosed Installation and Maintenance Manual.


3. Remove the soft gel plugs attached to the 1/4" ports on top of the system, marked with "Tap Water", "Purified Water" and "Concentrated water" respectively. The plugs can be removed by pushing down on the blue ring while pulling on the plugs. **DO NOT REMOVE THE WHITE PLUG LOCATED ON THE LEFT.**



4. Install the faucet.

### SAMPLE CONNECTION


quick fitting

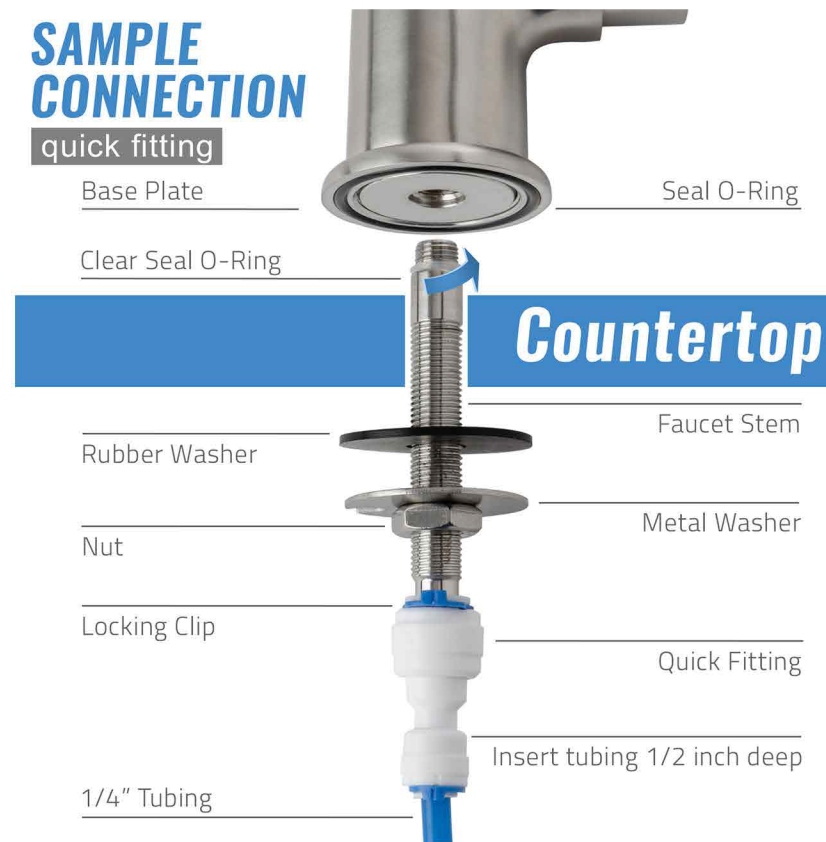

# GREATWELL

## ROG400 Installation Tips

5. Use the **RED TUBING** to connect to the "Tap water" port and the installed feed water adapter. Use the **BLUE TUBING** to connect to the "Purified Water" port and the faucet. Use the **WHITE TUBING** to connect to the "Concentrated Water" port and the installed drain saddle. The **YELLOW TUBING** can be put aside just in case a replacement is needed. Make sure to insert the tubing into the port about **1/2"** deep to ensure a leak free connection.

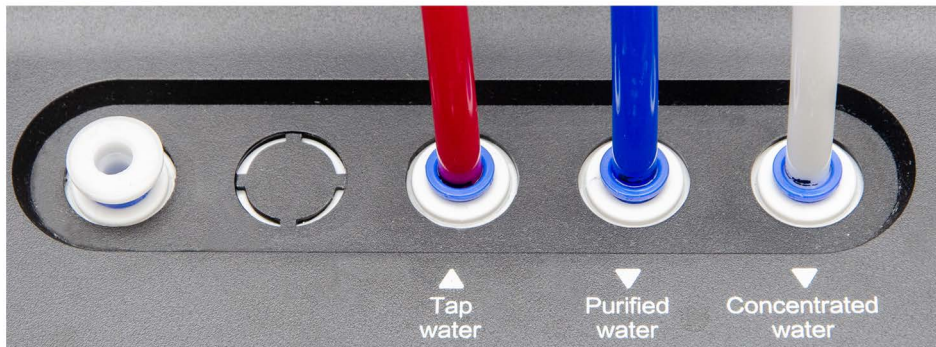

6. **DO NOT** turn on the feed water adapter or power on the system until all tubing connections are in place and secured.



7. Power on the system, and turn the faucet on. **Initial start up will take up to 60 seconds before generating a normal water flow.** We recommend leaving the faucet on to flush the system for at least 2 hours before using it.

**Any questions? We're here to help.**

Call us at 678-261-7611 or email us at [Support@123filter.com](mailto:Support@123filter.com).