

SLS3312PP  
Single-Handle Lavatory Faucet

Location:

## Specification Submittal

### Model Numbers

- ☐ **SLS3312PP** Single-Handle Lavatory Faucet with Push-Pop Metal Drain Assembly

### Options/Modifications

- ☐ **O5** 0.5 gpm (1.89 L/min) Flow Restrictor
- ☐ **MB** Matte Black finish
- ☐ **STN** Satin Nickel finish

### Compliance

- ASME® A112.18.1/CSA® B125.1.
- NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372.
- WaterSense® (1.0 gpm only).
- Lever handle meets ADA requirement for operation.




### Feature Highlights

- Single-hole mount configuration.
- Single lever handle operation.
- Ceramic disc control cartridge.
- 23" braided hose water supply connections.
- Standard 1.0 gpm (3.8 L/min) flow rate.
- Includes aerator key tool.
- Components made from metal and nonmetal materials plated in standard Polished Chrome finish.

### Warranty

**Limited Lifetime** - for residential installations.  
**10 Years** - for commercial/industrial installations.  
Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) complete warranty information.



## SKU Builder


Series	Finish	PP (required)	Flow Rate	Final SKU
SLS3312	STN	PP	O5	SLS3312STNPP05

## Architectural/Engineering Specification

Symmons Solarity Single-Handle Lavatory Faucet \_\_\_\_\_ Includes single-hole mount configuration, single lever handle operation, ceramic disc control cartridge, 23" braided hose water supply connections, and standard 1.0 gpm (3.8 L/min) flow rate. Components made from metal and nonmetal materials plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372, WaterSense® (1.0 gpm only) compliant. Lever handle meets ADA requirements for operation. Available options: O5 = 0.5 gpm (1.89 L/min) Flow Restrictor, MB = Matte Black finish, and STN = Satin Nickel finish.

SLS3312PP

## Dimensions

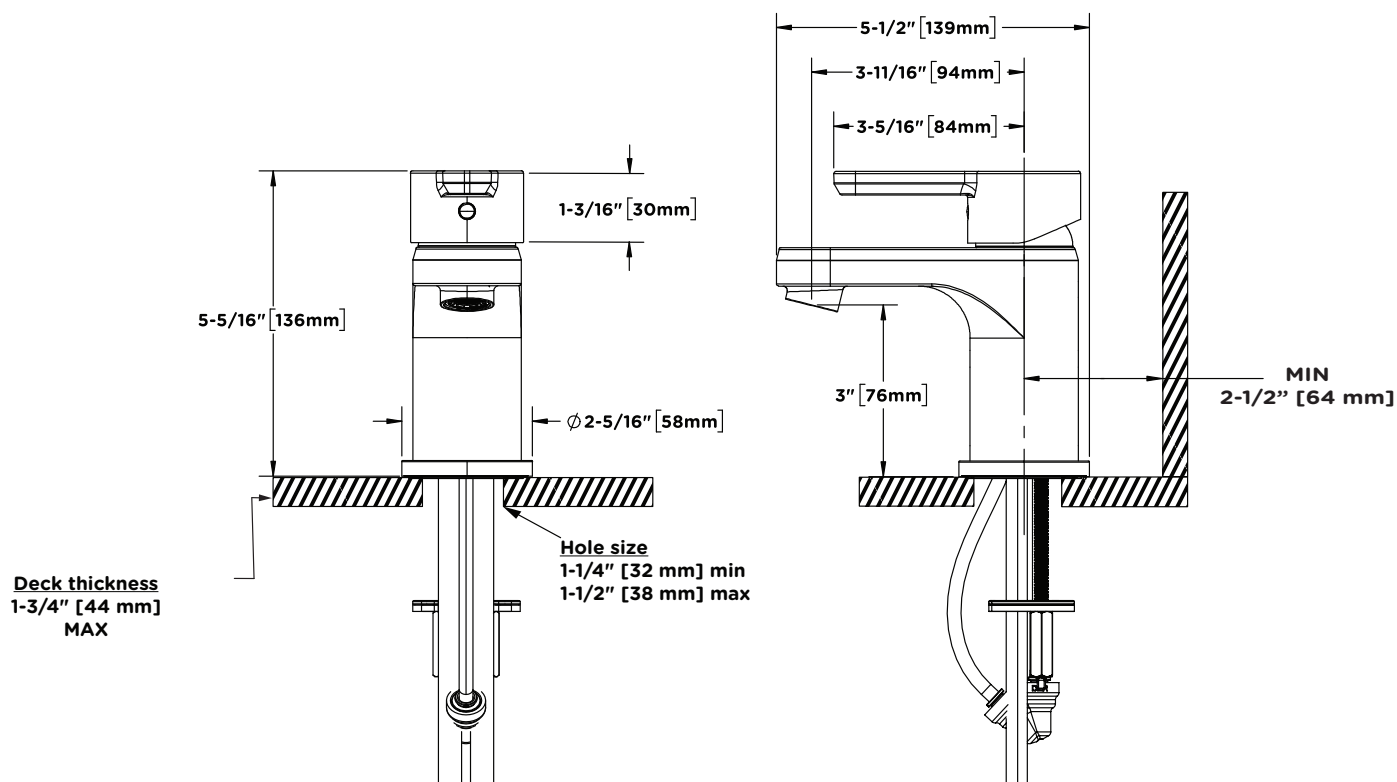

**Note:** Dimensions subject to change without notice.

