



2025

Contemporary Path Lights

COLLECTION

KICHLER.

Contemporary Path Lights

Modern Design. Inspired Form.

Featuring crisp, clean lines and geometric forms, our new contemporary path lights are designed to complement modern architectural elements while pairing well with the environments around them.

These integrated LED path lights offer a streamlined design that harmonizes effortlessly with a variety of home and exterior styles. Designed to take on the elements, these path lights are fully sealed and safeguard from water ingress and the outdoor elements – helping to protect and extend the life of the product.



"These fixtures are designed to complement modern architectural elements with crisp, clean lines and differing geometric forms. I wanted the designs to be simple enough that they don't take away from what they illuminate but still pair well with the environment around them."

- Bridget Renaud, Product Designer

Table of Contents


- 04 Integrated LED Path Lights
- 08 Drop-in Path Lights
- 09 Deck & Patio Lights
- 10 Deck & Patio Lights
- 13 12V Lamps, Accessories & Photometrics

12V Integrated LED Path Lights






Path & Spread

NEW 		NEW 		NEW 		
						
Name	Ninety Degree		Curved		Flared Top	
SKU # Finish	16261AZT27 16261BKT27 16261CBR27	16261AZT30 16261BKT30 16261CBR30	16260AZT27 16260BKT27	16260AZT30 16260BKT30	16262AZT27 16262BKT27	16262AZT30 16262BKT30
Watt/VA	2.75W/3.9VA		2.75W/3.9VA		2.75W/3.9VA	
Kelvin, Lumens & Efficacy	2700K, 120 lm, 44 lm/W	3000K, 120 lm, 44 lm/W	2700K, 165 lm, 60 lm/W	3000K, 165 lm, 60 lm/W	2700K, 135 lm, 49 lm/W	3000K, 135 lm, 49 lm/W
Dimensions	2.4"W x 7.3"L x 22.5"H		3"W x 7.6"L x 22.5"H		3.5"W x 4.2"L x 23.6"H	
Included Accessories	Includes 14" Slotted Ground Stake and Gel-Filled Wire Nuts. 30" of usable #18-2, SPT-1W leads.		Includes 14" Slotted Ground Stake and Gel-Filled Wire Nuts. 30" of usable #18-2, SPT-1W leads.		Includes 8" Slotted Ground Stake and Gel-Filled Wire Nuts. 30" of usable #18-2, SPT-1W leads.	
Optional Accessories	Surface Mounting Flange 15601AZT/BKT . Surface Mounting Bracket 15607AZT/BKT . Power Post 15276BK .		Surface Mounting Flange 15601AZT/BKT . Surface Mounting Bracket 15607AZT/BKT . Power Post 15276BK .		Surface Mounting Flange 15601AZT/BKT . Surface Mounting Bracket 15607AZT/BKT . 14" Stake 15576BK . Power Post 15276BK .	

NEW 		NEW 		NEW 		
						
Name	Aimed Bollard		Round Bollard Tall		Round Bollard Short	
SKU # Finish	16263AZT27 16263BKT27	16263AZT30 16263BKT30	16265AZT27 16265BKT27	16265AZT30 16265BKT30	16264AZT27 16264BKT27	16264AZT30 16264BKT30
Watt/VA	5W/6.7VA		2.75W/3.9VA		2.75W/3.9VA	
Kelvin, Lumens & Efficacy	2700K, 135 lm, 27 lm/W	3000K, 135 lm, 27 lm/W	2700K, 150 lm, 54 lm/W	3000K, 150 lm, 54 lm/W	2700K, 150 lm, 54 lm/W	3000K, 150 lm, 54 lm/W
Dimensions	4.6"W x 3.4"L x 25.4"H		3"Dia. x 24"H		3"Dia. x 15.2"H	
Included Accessories	Articulates 45° forward or backward. Includes 14" Slotted Ground Stake and Gel-Filled Wire Nuts. 30" of usable #18-2, SPT-1W leads.		Includes 8" Slotted Ground Stake and Gel-Filled Wire Nuts. 30" of usable #18-2, SPT-1W leads.		Includes 8" Slotted Ground Stake and Gel-Filled Wire Nuts. 30" of usable #18-2, SPT-1W leads.	
Optional Accessories	Surface Mounting Flange 15601AZT/BKT . Surface Mounting Bracket 15607AZT/BKT . Power Post 15276BK .		Surface Mounting Flange 15601AZT/BKT . Surface Mounting Bracket 15607AZT/BKT . 14" Stake 15576BK . Power Post 15276BK .		Surface Mounting Flange 15601AZT/BKT . Surface Mounting Bracket 15607AZT/BKT . 14" Stake 15576BK . Power Post 15276BK .	

Path & Spread

				
				
Name	Shallow Shade Large		Shallow Shade Small	
SKU # Finish	16197BKT27	16197BKT30	16196BKT27	16196BKT30
Watt/VA	2.1W/3.2VA		2.1W/3.2VA	
Kelvin, Lumens & Efficacy	2700K, 180 lm, 94 lm/W	3000K, 180 lm, 94 lm/W	2700K, 180 lm, 94 lm/W	3000K, 180 lm, 94 lm/W
Dimensions	8"W x 24"H		6"W x 24"H	
Included Accessories	Includes 8" Slotted Ground Stake and Gel-Filled Wire Nuts. 30" of usable #18-2, SPT-1W leads.		Includes 8" Slotted Ground Stake and Gel-Filled Wire Nuts. 30" of usable #18-2, SPT-1W leads.	
Optional Accessories	Surface Mounting Flange 15601BKT . Surface Mounting Bracket 15607BKT . 14" Stake 15576BK . Power Post 15276BK .		Surface Mounting Flange 15601BKT . Surface Mounting Bracket 15607BKT . 14" Stake 15576BK . Power Post 15276BK .	

						
Name	Fundamentals™ LED		Fundamentals™ LED		Traditional Dome LED	
SKU # Finish	15839CO27R		16120AZT27 16120BKT27 16120CBR27	16120AZT30 16120BKT30 16120CBR30	15878CBR27	15878CBR30
Watt/VA	3W/4.5VA		3W/4.5VA		3W/4.5VA	
Kelvin, Lumens & Efficacy	2700K, 250 lm, 83 lm/W		2700K, 250 lm, 83 lm/W	3000K, 250 lm, 83 lm/W	2700K, 250 lm, 83 lm/W	3000K, 250 lm, 83 lm/W
Dimensions	6"W x 21.5"H		6"W x 21"H		6.75"W x 22.75"H	
Included Accessories	Includes 8" Slotted Ground Stake and Gel-Filled Wire Nuts. 30" of usable #18-2, SPT-1W leads.		Includes 8" Slotted Ground Stake and Gel-Filled Wire Nuts. 30" of usable #18-2, SPT-1W leads.		Includes 8" Slotted Ground Stake and Gel-Filled Wire Nuts. 30" of usable #18-2, SPT-1W leads.	
Optional Accessories	Surface Mounting Flange 15601AZT/BKT . Surface Mounting Bracket 15607AZT/BKT . 14" Stake 15576BK . Power Post 15276BK .		Surface Mounting Flange 15601AZT/BKT . Surface Mounting Bracket 15607AZT/BKT . 14" Stake 15576BK . Power Post 15276BK .		Surface Mounting Flange 15601AZT/BKT . Surface Mounting Bracket 15607AZT/BKT . 14" Stake 15576BK . Power Post 15276BK .	

Path & Spread

						
Name	Stepped Dome LED		Short Stepped Dome LED	8" Dome LED		
SKU # Finish	15820BKT27 15820AZT27 15820CBR27 15820CO27	15820BKT30 15820AZT 15820CBR30	15821BKT27 15821AZT27 15821CBR27	15821BKT30 15821AZT 15821CBR30	15810AZT27R 15810BKT27R 15810CBR27	15810AZT30R 15810BKT30R 15810CBR30
Watt/VA	2W/3VA		2W/3VA		3W/4.5VA	
Kelvin, Lumens & Efficacy	2700K, 160 lm, 80 lm/W	3000K, 160 lm, 80 lm/W	2700K, 160 lm, 80 lm/W	3000K, 160 lm, 80 lm/W	2700K, 250 lm, 83 lm/W	3000K, 250 lm, 83 lm/W
Dimensions	6.25"W x 23.25"H		6.25"W x 15.75"H		8.25"W x 22"H	
Included Accessories	Includes 8" Slotted Ground Stake and Gel-Filled Wire Nuts. 20" of usable #18-2, SPT-1W leads.		Includes 8" Slotted Ground Stake and Gel-Filled Wire Nuts. 30" of usable #18-2, SPT-1W leads.		Includes 8" Slotted Ground Stake and Gel-Filled Wire Nuts. 30" of usable #18-2, SPT-1W leads.	
Optional Accessories	Surface Mounting Flange 15601AZT/BKT . Surface Mounting Bracket 15607AZT/BKT . 14" Stake 15576BK . Power Post 15276BK .		Surface Mounting Flange 15601AZT/BKT . Surface Mounting Bracket 15607AZT/BKT . 14" Stake 15576BK . Power Post 15276BK .		Surface Mounting Flange 15601AZT/BKT . Surface Mounting Bracket 15607AZT/BKT . 14" Stake 15576BK . Power Post 15276BK .	

				
Name	8" Short Dome LED		6" Dome LED	
SKU # Finish	15811AZT27R	15811AZT30R	15870AZT27R 15870BKT27R	15870AZT30R 15870BKT30R
Watt/VA	3W/4.5VA		3W/4.5VA	
Kelvin, Lumens & Efficacy	2700K, 250 lm, 83 lm/W	3000K, 250 lm, 83 lm/W	2700K, 250 lm, 83 lm/W	3000K, 250 lm, 83 lm/W
Dimensions	8.25"W x 16"H		6.25"W x 22"H	
Included Accessories	Includes 8" Slotted Ground Stake and Gel-Filled Wire Nuts. 30" of usable #18-2, SPT-1W leads.		Includes 8" Slotted Ground Stake and Gel-Filled Wire Nuts. 30" of usable #18-2, SPT-1W leads.	
Optional Accessories	Surface Mounting Flange 15601AZT . Surface Mounting Bracket 15607AZT . 14" Stake 15576BK . Power Post 15276BK .		Surface Mounting Flange 15601AZT/BKT . Surface Mounting Bracket 15607AZT/BKT . 14" Stake 15576BK . Power Post 15276BK .	



12V Drop-In
Path Lights

Path & Spread

	NEW FINISH 			
Name	Two Arm		Right Angle	Textured Bollard
SKU # Finish	15844AZT 15844BKB	15844BKT 15844CBR	15846AZT 15846BKT	15848AZT 15848BKT
Socket Type	T5 Wedge		T5 Wedge	T5 Wedge
Dimensions	3"W x 6"L x 22"H		1.5"W x 5.75"L x 22"H	4"W x 5.5"L x 27"H
Included Accessories	Includes 14" Slotted Ground Stake, Locknut, and 2 Gel-Filled Wire Nuts. Cast Brass has 14" Slotted in-ground stake, 36" of usable #18-2, SPT-1W leads. Lamp sold separately.		Includes 8" Slotted Ground Stake, Locknut, and 2 Gel-Filled Wire Nuts. 48" of usable #18-2, SPT-1W leads. Lamp sold separately.	Includes 14" Slotted Ground Stake, Locknut, and 2 Gel-Filled Wire Nuts. 48" of usable #18-2, SPT-1W leads. Lamp sold separately.
Optional Accessories	Surface Mounting Flange 15601AZT/BKT (needed for attachment to junction box). Power Post Stake 15276BK . <i>Lamps: 2.3W T5 18204-18205,* 1.5W T5 18120-18121 and 18224-18225, 1W T5 18198-18199.</i>		Surface Mounting Flange 15601AZT/BKT (needed for attachment to junction box). Power Post Stake 15276BK . <i>Lamps: 2.3W T5 18204-18205,* 1.5W T5 18120-18121 and 18224-18225, 1W T5 18198-18199.</i>	Power Post Stake 15276BK . Bollard Mounting Stake 15578BK . <i>Lamps: 2.3W T5 18204-18205,* 1.5W T5 18120-18121.</i>

		NEW FINISH 	NEW FINISH 
Name	Tube	Small Hat Brass	Traditional Dome
SKU # Finish	15845BKT	15506BKB 15506CBR	15478AZT 15478BKB 15478BKT 15478CBR
Socket Type	T5 Wedge	T3/G4 Bi-Pin	T3/G4 Bi-Pin
Dimensions	2.25"W x 7"L x 23"H	4.25"Dia. x 17.25"H	6.75"Dia. x 21"H
Included Accessories	Includes 8" Slotted Ground Stake, Locknut, and 2 Gel-Filled Wire Nuts. 48" of usable #18-2, SPT-1W leads. Lamp sold separately.	Includes 8" Slotted Ground Stake and Locknut. 48" of usable #18-2, SPT-1W leads. Gel-Filled Wire Nuts not included. Lamp sold separately.	Includes 8" Slotted Ground Stake, Locknut and Gel-Filled Wire Nuts. 48" of usable #18-2, SPT-1W leads. Lamp sold separately.
Optional Accessories	Power Post Stake 15276BK . Surface Mounting Flange 15601BKT (needed for attachment to junction box). <i>Lamps: 2.3W T5 18204-18205,* 1.5W T5 18120-18121 and 18224-18225, 1W T5 18198-18199.</i>	3" Mounting Base 15493BKB/CBR . 14" Stake 15576BK . Power Post 15276BK . <i>Lamps: 2.3W T3/G4 18206-18207,* 2.3W T3/G4 18206-18207.</i>	Surface Mounting Flange 15601AZT/BKT . 3" Mounting Base 15493BKB/CBR . 14" In-ground Support Stake 15576BK . Power Post 15276BK . <i>Lamps: 2.3W T3/G4 18206-18207,* 2.3W T3/G4 18206-18207.</i>

Path & Spread

	NEW FINISH 		
Name	Stepped Dome	6" Dome	8" Dome
SKU # Finish	15505BKB 15505CBR	15470AZT 15470BKT 15470CBR	15310AZT 15310AZT6 15310BKT 15310CBR
Socket Type	T3/G4 Bi-Pin	T5 Wedge	T5 Wedge
Dimensions	6.13"Dia. x 19.25"H	6"Dia. x 21"H	8.25"Dia. x 21"H
Included Accessories	Includes 8" Slotted Ground Stake, Locknut and Gel-Filled Wire Nuts. 48" of usable #18-2, SPT-1W leads. Lamp sold separately.	Includes 8" Slotted Ground Stake, 18" Stem and Locknut. 24" of usable #18-2, SPT-1W leads. Gel-Filled Wire Nuts included with AZT and BKT. Gel-Filled Wire Nuts not included with CBR. Lamp sold separately.	Includes 8" Slotted Ground Stake, Locknut and Gel-Filled Wire Nuts. 24" of usable #18-2, SPT-1W leads. Lamp sold separately.
Optional Accessories	3" Mounting Base 15493BKB/CBR . 14" Stake 15576BK . Power Post 15276BK . <i>Lamps: 2.3W T3/G4 18206-18207,* 2.3W T3/G4 18206-18207.</i>	Surface Mounting Flange 15601AZT/BKT . Surface Mounting Bracket 15607AZT/BKT . 14" Stake 15576BK . Power Post 15276BK . <i>Lamps: 2.3W T5 18204-18205,* 1.5W T5 18224-18225.</i>	Surface Mounting Flange 15601 . Surface Mounting Bracket 15607 . 14" Stake 15576BK . Power Post 15276BK . <i>Lamps: 2.3W T5 18204-18205,* 1.5W T5 18224-18225.</i>

	
Name	Short 8" Dome
SKU # Finish	15410AZT
Socket Type	T5 Wedge
Dimensions	8.25"W x 15"H
Included Accessories	Includes 8" Slotted Ground Stake, Locknut and Gel-Filled Wire Nuts. 30" of usable #18-2, SPT-1W leads. Lamp sold separately.
Optional Accessories	Surface Mounting Flange 15601 . Surface Mounting Bracket 15607 . 14" Stake 15576BK . Power Post 15276BK . <i>Lamps: 2.3W T5 18204-18205,* 1.5W T5 18224-18225.</i>



Path & Spread



Name	Fundamentals™		Eclipse™		Eclipse™ Side Mount	
SKU # Finish	15439OB 15439TZT		15323AZT 15323BKT		15423AZT 15423BKT	
Socket Type	S8 Wedge		S8 Wedge		S8 Wedge	
Dimensions	6"W x 20.25"H		4.5"W x 18.5"H		4.5"W x 19.5"H	
Included Accessories	Includes 8" Slotted Ground Stake, Locknut, and Gel-Filled Wire Nuts. 35" of usable #18-2, SPT-1W leads. Lamp sold separately.		Includes 8" Slotted Ground Stake, 18" Stem, Locknut and Gel-Filled Wire Nuts. 34" of usable #18-2, SPT-1W leads. Lamp sold separately.		Includes 8" Slotted Ground Stake, Locknut and Gel-Filled Wire Nuts. 34" of usable #18-2, SPT-1W leads. Lamp sold separately.	
Optional Accessories	Surface Mounting Flange 15601AZT/BKT . Surface Mounting Bracket 15607AZT/BKT . 14" Stake 15576BK . Power Post 15276BK . <i>Lamps: 2.3W S8 18202-18203.*</i>		Surface Mounting Flange 15601AZT/BKT . Surface Mounting Bracket 15607AZT/BKT . 14" Stake 15576BK . Power Post 15276BK . <i>Lamps: 2.3W S8 18202-18203.*</i>		Surface Mounting Flange 15601AZT/BKT . Surface Mounting Bracket 15607AZT?BKT . 14" Stake 15576BK . Power Post 15276BK . <i>Lamps: 2.3W S8 18202-18203.*</i>	

Deck & Patio




Name	Louvered Down Deck Rail Light		Up & Down Deck Light	
SKU # Finish	15066AZT 15066BKT	15066CBR 15066WHT	15079AZT 15079BKT	15079CBR
Socket Type	Mini Ceramic T5 Wedge		Mini Ceramic T5 Wedge	
Dimensions	1.25"W x 1.25"L x 6"H		2.25"W x 3.25"L x 6"H	
Included Accessories	Includes Stainless Steel Mounting Plate. 72" of usable #18-2, SPT-1W leads.		Includes Stainless Steel Screws and Mounting Hardware. BKT & CBR includes Heat-Resistant Lens. AZT lens 15659AZT sold separately. 70" of usable #18-2, SPT-1W leads.	
Optional Accessories	<i>Lamps: 1W T5 18198-18199.</i>		<i>Lamps: 1W T5 18198-18199 and 2.3W T5 18204-18205.</i>	

Deck & Patio




Name	Conical Mini LED		Half Moon LED Deck Light		Fundamentals™ LED	
SKU # Finish	15765AZT27R 15765BKT27R 15765WHT27R	15765AZT30R 15765BKT30R 15765WHT30R	15764AZT27R 15764BKT27R 15764CBR27 15764WHT27R	15764AZT30R 15764BKT30R 15764CBR30 15764WHT30R	16110AZT27 16110BKT27 16110CO27	16110AZT30 16110BKT30
Watt/VA	0.86W/1.86VA		0.86W/1.86VA		0.86W/1.86VA	
Kelvin, Lumens & Efficacy	2700K, 41 lm, 50 lm/W	3000K, 43 lm, 51 lm/W	2700K, 41 lm, 50 lm/W	3000K, 43 lm, 51 lm/W	2700K, 41 lm	3000K, 43 lm
Dimensions	3.75"W x 2.25"D x 2.25"H		4"W x 4"D x 2"H		3.25"W x 2"D x 2.5"H	
Included Accessories	Includes Gel-Filled Wire Nuts. 72" of usable #18-2, SPT-1W leads, plus stainless steel Mounting Bracket and Hardware. White finish has coordinating white color leads.		Includes Gel-Filled Wire Nuts. 72" of usable #18-2, SPT-1W leads, plus stainless steel Mounting Bracket and Hardware. White finish has coordinating white color leads.		Includes Gel-Filled Wire Nuts.	



Name	Four Corners LED		Louvered Surface Mount Step Light LED		Contemporary Surface Mount Step Light LED	
SKU # Finish	16111AZT27 16111BKT27	16111AZT30 16111BKT30	16171AZT27 16171BKT27 16171CBR27	16171AZT30 16171BKT30 16171CBR30	16172AZT27 16172BKT27 16172CBR27	16172AZT30 16172BKT30 16172CBR30
Watt/VA	0.86W/1.86VA		0.82W/1.45VA		0.82W/1.45VA	
Kelvin, Lumens & Efficacy	2700K, 41 lm	3000K, 43 lm	2700K, 7 lm, 8 lm/W	3000K, 7 lm, 8 lm/W	2700K, 17 lm, 20 lm/W	3000K, 17 lm, 20 lm/W
Dimensions	3.25"W x 1.4"D x 2.25"H		0.75"W x 6"L x 3"H		0.75"W x 6.2"L x 2.6"H	
Included Accessories	Includes Gel-Filled Wire Nuts.		2000-Volt Fixture Surge Protection. Includes Diffuser, Mounting Hardware, Mounting Template, and Wire Connectors. 84" of usable 18 AWG 105 C, 300V, SPT-1W leads.		2000-Volt Fixture Surge Protection. Includes Diffuser, Mounting Hardware, Mounting Template, and Wire Connectors. 84" of usable 18 AWG 105 C, 300V, SPT-1W leads.	

Key Components When Choosing LED Lamps

We know that each landscape project is unique – an application may look better with a warmer color temperature versus a cooler one, or an area may need a tighter beam spread while others might need a larger one. To get the perfect design, you need to make sure you have the right fixture and the correct LED lamp before you get started. That is why it is important to consider the socket base, lamp type, beam angle, lumen level, and color temperature when selecting LED lamps for your project.

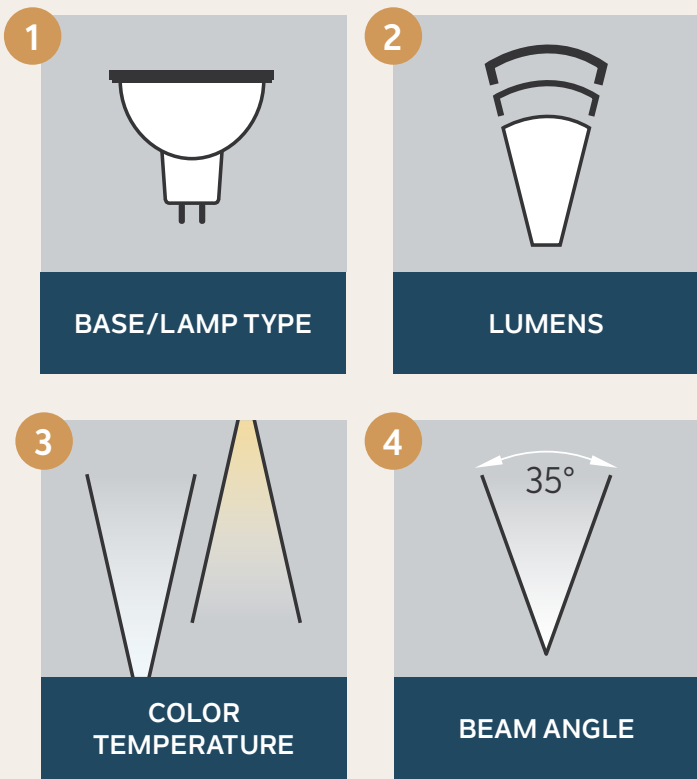

MR16 Professional Series lamp shown

Contractor Series LED Lamps

Provides top LED lamp lighting styles and color temps at a professional performance value. These include:

- Popular LED lamp styles in 2700K and 3000K
- Compatible with all Kichler drop-in fixtures
- Consistent results: 9-15V operating range with no loss in light output
- 7-step binning for close color consistency
- CRI of 80+

Offering a 3-year warranty, the Contractor Series LED Lamps provide the flexibility of selecting from a simplified portfolio while still meeting your clients' landscaping needs and budget.

Beam Angle and Color Temperature Options

CHOOSE THE RIGHT BEAM ANGLE

- Use a 10-15° spot to light the trunk of a tree or highlight a column.
- One 35° flood light works well for a small deciduous tree or create a cross lighting effect using two 35° floods for a medium-sized tree.
- For wide tree canopies a 60° works best. Cross lighting can be achieved using two 60° floods on each opposing side of the tree.
- 180°-300° Omni-directional lamps are suitable for hanging lights, path & spread, deck, and wall wash fixtures - anywhere indirect light spread is desired.




WARM WHITE - 2700K

- Surroundings with warmer colors, like brown and cedar
- Natural-colored walls or stonework
- Foliage that is red, orange or yellow (ex: highlighting oak trees)



PURE WHITE - 3000K

- Surroundings with dark materials, like deep slate, black or gray
- Foliage that is blue or purple (ex: highlighting blue spruce trees)

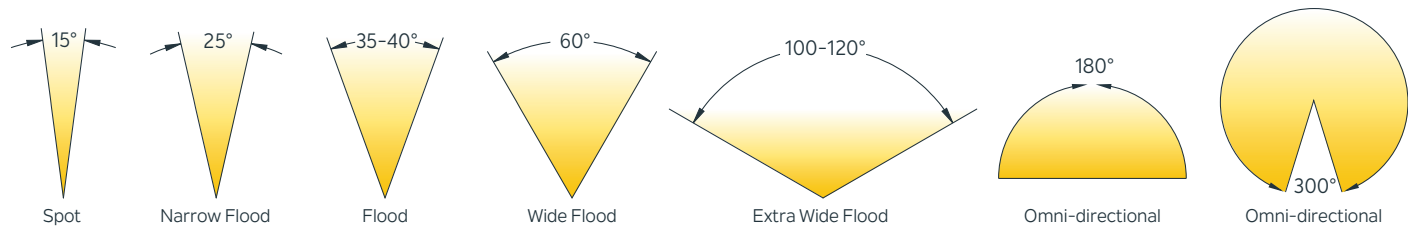

Contractor Series

LAMP	BASE/ LAMP TYPE	WATTAGE	KELVIN/LUMENS (lm for Bare Lamps)	ORDERING INFO		
				35° Flood	60° Wide Flood	100° Extra Wide Flood
	MR16 Damp Location D	4W, 5.7VA Compares to 20-35W Halogen	2700K - 330 lm	18210	18212	18214
			3000K - 330 lm	18211	18213	18215
	MR16 Damp Location D	7W, 10VA Compares to 50W Halogen	2700K - 550 lm	18216	18218	18220
			3000K - 550 lm	18217	18219	18221

OMNI-DIRECTIONAL LAMPS

LAMP	BASE/ LAMP TYPE	WATTAGE	KELVIN/LUMENS (lm for Bare Lamps)	ORDERING INFO
				300° Omni-Directional Flood Beam
	T3/G4 Bi-Pin* Wet Location W	1.5W, 2.4VA Compares to 20W Halogen	2700K - 180 lm	18222
			3000K - 180 lm	18223
	T5 Wedge* Wet Location W	1.5W, 2.4VA Compares to 20W Halogen	2700K - 180 lm	18224
			3000K - 180 lm	18225

* Ideal for path, deck/step, wall wash fixtures and more.

Professional Series LED Lamps

Designed to last and offers the quality, variety, and design options you are looking for in a LED lamp.

- Consistent results: 9-15V operating range with no loss in light output
- Custom TIR acrylic optics: superior control and light uniformity
- 4-step binning gives the most consistent color output from lamp to lamp
- High lumens per watt & total lumen output
- Fully encapsulated: protects internal components from the outdoor elements
- CRI of 85+

With a 6-year warranty and our widest selection, these lamps are designed to meet the unique landscape needs of your clients with top performance.

LAMP	BASE/ LAMP TYPE	WATTAGE	KELVIN/LUMENS (lm for Bare Lamps)	ORDERING INFO			
				15° Spot	25° Narrow Flood	40° Flood	60° Wide Flood
	MR8 Bi-Pin Damp Location D	2W, 3.1VA Compares up to 15W Halogen	2700K - 150 lm	--	--	18154	18156
			3000K - 150 lm	--	--	18155	18157
	MR11 Bi-Pin Damp Location D	2.5W, 3.8VA Compares up to 20W Halogen	2700K - 180 lm	--	--	18162	--
			3000K - 180 lm	--	--	--	--
	MR16 Damp Location D	4W, 5.4VA Compares up to 20W Halogen	2700K - 285 lm	18126	18128	18130	18132
			3000 - 285 lm	18127	--	18131	18133
	MR16 Damp Location D	5W, 6.6VA Compares up to 35W Halogen	2700K - 365 lm	18134	18136	18138	18140
			3000K - 365 lm	18135	18137	18139	18141
	MR16 Damp Location D	7.2W, 9.9VA Compares up to 50W Halogen	2700K - 615 lm	18142	18144	18146	18148
			3000K - 615 lm	18143	--	18147	18149
	PAR36 Wet Location W	4.2W, 6.3VA Compares up to 20W Halogen	2700K - 290 lm	--	--	18170	--
			3000K - 290 lm	--	--	18171	--
	PAR36 Wet Location W	6W, 8.5VA Compares up to 35W Halogen	2700K - 475 lm	--	--	18178	--
			3000K - 475 lm	--	--	18179	--
	PAR36 Wet Location W	10W, 13.2VA Compares up to 50W Halogen	2700K - 700 lm	--	18184	18186	18188
			3000K - 700 lm	--	--	18187	18189

OMNI-DIRECTIONAL LAMPS



LAMP	BASE/ LAMP TYPE	WATTS	KELVIN/LUMENS (lm for Bare Lamps)	ORDERING INFO
				120° Extra Wide Flood
	T5 Wedge* Wet Location W	1.5W, 2.4VA Compares up to 16W Xenon	2700K - 130 lm	18120
			3000K - 130 lm	18121
	S8 Wedge* Wet Location W	1.5W, 2.4VA Compares up to 18.5W Krypton	2700K - 130 lm	18122
			3000K - 130 lm	18123

* Ideal for side mount path, deck/step, wall wash fixtures and more.

LAMP	BASE/ LAMP TYPE	WATTAGE	KELVIN/LUMENS (lm for Bare Lamps)	ORDERING INFO	
				180° Omni-Directional	300° Omni-Directional
	T5 Wedge Mini Ceramic Wet Location W	1W, 1.2VA Compares up to 10W Halogen	2700K - 85 lm	18198	--
			3000K - 85 lm	18199	--
	T3/G4 Bi-Pin Micro Ceramic Wet Location W	1W, 1.2VA Compares up to 10W Halogen	2700K - 85 lm	18200	--
			3000K - 85 lm	18201	--
	T5 Wedge High Lumen Mini Wet Location W	2.3W, 3.3VA Compares up to 20W Halogen	2700K - 215 lm	--	18204
			3000K - 215 lm	--	18205
	S8 Wedge High Lumen Mini Wet Location W	2.3W, 3.3VA Compares up to 20W Halogen	2700K - 215 lm	--	18202
			3000K - 215 lm	--	18203
	T3/G4 Bi-Pin High Lumen Mini Wet Location W	2.3W, 3.3VA Compares up to 20W Halogen	2700K - 215 lm	--	18206
			3000K - 215 lm	--	18207
	BA15 Single Contact High Lumen Mini Wet Location W	2.3W, 3.3VA Compares up to 20W Halogen	2700K - 215 lm	--	18208
			3000K - 215 lm	--	--

Popular 12V Lamp Photometrics

The curves indicate the illuminated area and the average illumination when the luminaire is at different distances. Stated footcandles are for bare lamps only. For additional landscape product information tools and resources, visit Kichler.com/Landscape.

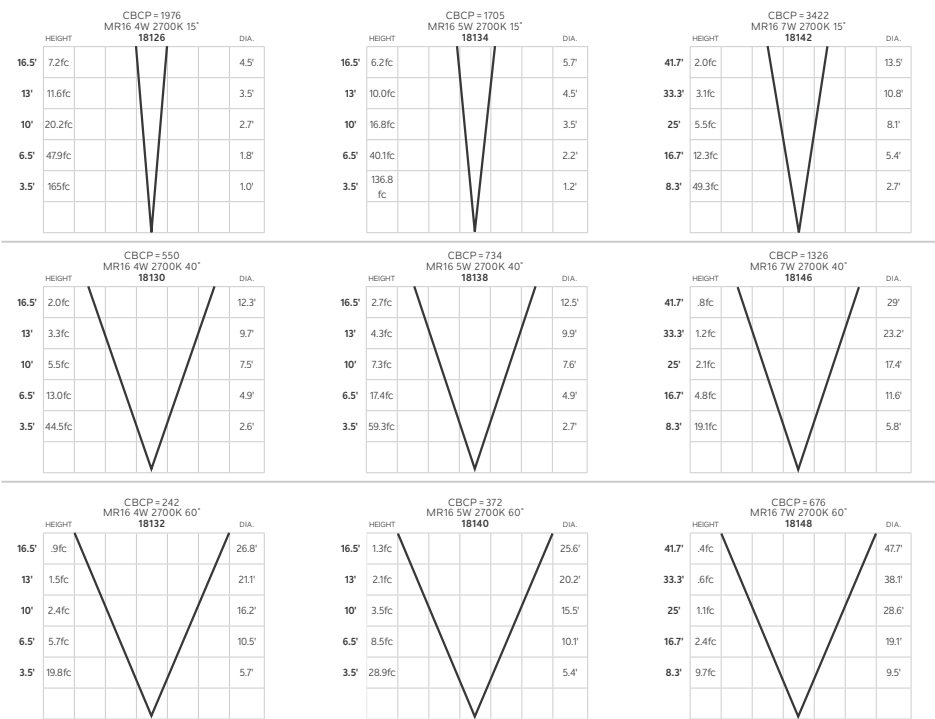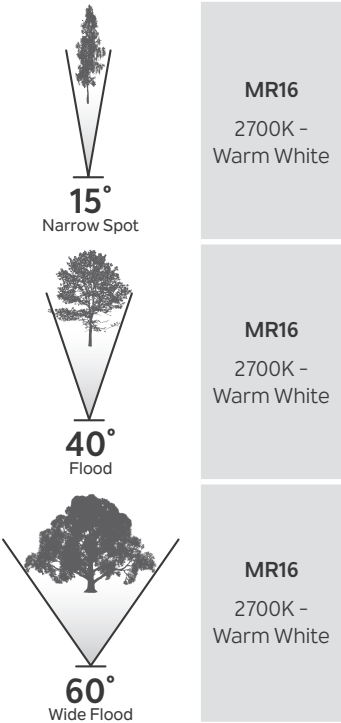

Path Light Accessories

					
Name	Polymeric Support Stakes		Power Post Stake	4" Surface Mounting Flange	Surface Mounting Bracket
SKU & Finish	15575BK 15576BK	8" 14"	15276BK	15601AZT 15601BKT	15607AZT 15607BKT
Notes			Works with 1/2 NPSM threaded fixtures.	1/2-14 NPSM Thd.	1/2-14 NPSM Thd.

Path Light Photometrics

16196 – Small Shallow Shade									
Foot-candles (FC)	Distance from Light								
	0 ft.	1 ft.	2 ft.	3 ft.	4 ft.	5 ft.	6 ft.	7 ft.	8 ft.
	7.25	6.41	4.74	3.07	1.95	1.49	0.74	0.28	0.09
16197 – Large Shallow Shade									
Foot-candles (FC)	Distance from Light								
	0 ft.	1 ft.	2 ft.	3 ft.	4 ft.	5 ft.	6 ft.	7 ft.	8 ft.
	7.43	6.69	4.83	3.34	2.04	1.58	0.93	0.19	0.09
16260 – Curved									
Foot-candles (FC)	Distance from Light								
	0 ft.	1 ft.	2 ft.	3 ft.	4 ft.	5 ft.	6 ft.	7 ft.	8 ft.
	21.5	15.25	5.43	1.67	0.61	0.24	0.13	0.06	0.05
16261 – Ninety Degree									
Foot-candles (FC)	Distance from Light								
	0 ft.	1 ft.	2 ft.	3 ft.	4 ft.	5 ft.	6 ft.	7 ft.	8 ft.
	18.8	12.7	4.0	1.17	0.38	0.15	0.08	0.04	0.00
16262 – Flared									
Foot-candles (FC)	Distance from Light								
	0 ft.	1 ft.	2 ft.	3 ft.	4 ft.	5 ft.	6 ft.	7 ft.	8 ft.
	24.3	12.95	4.05	1.20	0.42	0.15	0.07	0.00	0.00
16263 – Aimed Bollard (Mid Tilt)									
Foot-candles (FC)	Distance from Light								
	0 ft.	1 ft.	2 ft.	3 ft.	4 ft.	5 ft.	6 ft.	7 ft.	8 ft.
	30.5	14.8	7.06	3.07	1.50	0.80	0.43	0.30	0.19
16264 – 15" Round Bollard									
Foot-candles (FC)	Distance from Light								
	0 ft.	1 ft.	2 ft.	3 ft.	4 ft.	5 ft.	6 ft.	7 ft.	8 ft.
	0.75	3.27	1.40	0.63	0.34	0.22	0.14	0.12	0.10
16265 – 24" Round Bollard									
Foot-candles (FC)	Distance from Light								
	0 ft.	1 ft.	2 ft.	3 ft.	4 ft.	5 ft.	6 ft.	7 ft.	8 ft.
	0.46	1.27	1.10	0.61	0.36	0.22	0.13	0.08	0.05

Path Light Spacing & Planning

Staggered Path Lighting

Use spread lights when illuminating sidewalks, lawn, and flower beds at the same time.

When using a staggered path lighting approach, we recommend installing the path lights at least 6" away from the edge of the pathway and space the fixtures at 15', using a center-to-center measurement, which will leave a 2'-5' gap between pools of light and properly illuminate the sidewalk.

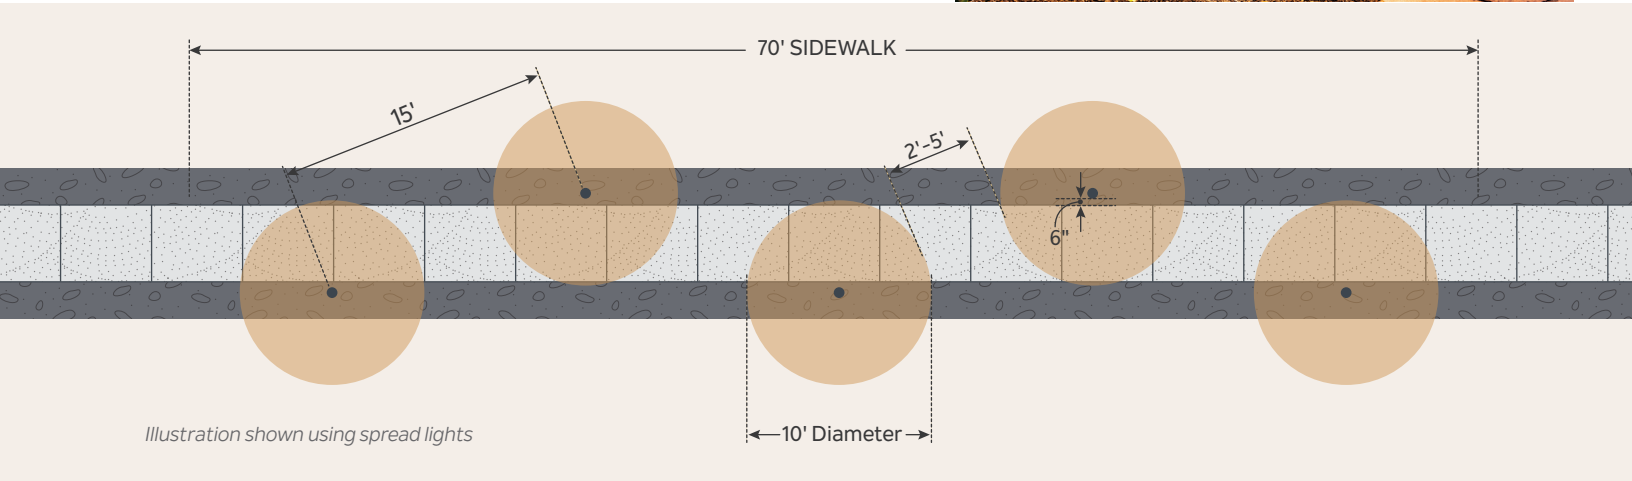


Illustration shown using spread lights



Linear Path Lighting

Use path and spread lights sparingly, try not to overlap the light output of other path lights.

By spacing the fixtures at 12', the gap between pools of light would end up being just over 2' on the near side of the walk and 9' on the far side of the walk.

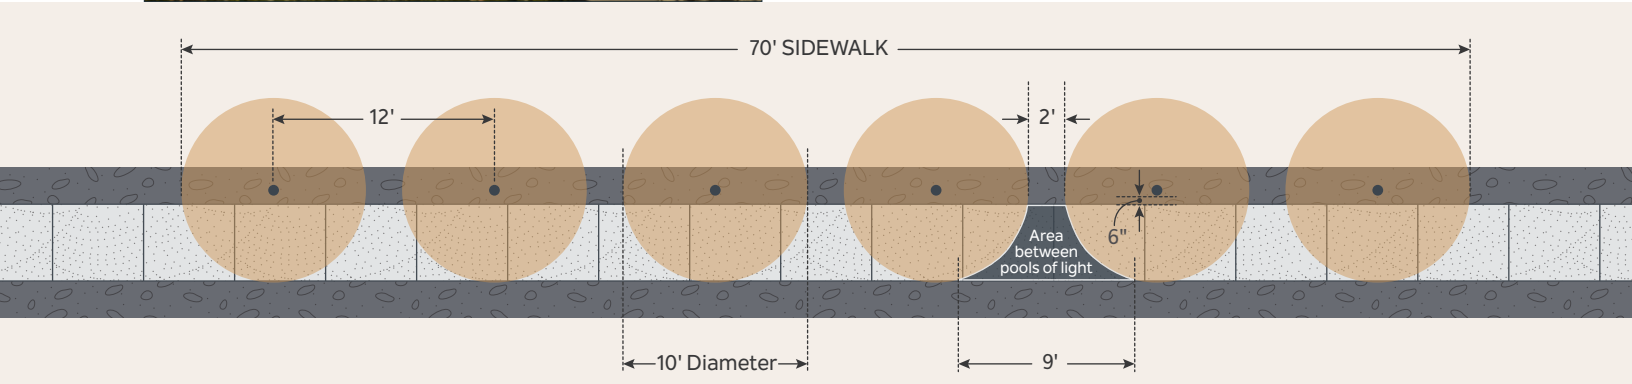


Illustration shown using spread lights



Coordinating the Outdoors

Exterior lighting elevates an outdoor space while also adding a touch of style and function. See how you can expand the beauty and security of the outdoors with these coordinating collections.



NOTES

 All electrical products are certified and listed to UL/CSA standards for use in U.S.A. and Canada except where noted.

- All products featured are certified and listed to UL/CSA standards for wet location except where noted.
- Finishes for fixtures installed outdoors are subject to change due to prolonged exposure to sunlight, airborne pollutants, and other forms of weathering.
- To serve you better, Kichler Lighting reserves the right to make improvements to the products in this catalog. Therefore, some products may change during the life of the catalog and the product information contained in this catalog may also have changed.



Kichler Lighting is a member of the American Lighting Association (ALA), a trade association representing the residential lighting and ceiling fan industries in the United States and Canada. Its membership includes leading lighting and fan manufacturers, showrooms (retailers), manufacturers representatives and designers. ALA members are dedicated to providing the public with the proper application of quality residential lighting.

For warranty information visit [Kichler.com/Warranty](https://www.kichler.com/Warranty)

CONNECT WITH US



Follow us: [instagram.com/KichlerLighting](https://www.instagram.com/KichlerLighting)
Like us: [facebook.com/KichlerLighting](https://www.facebook.com/KichlerLighting)
Follow us: twitter.com/KichlerLight
Join us: [houzz.com/pro/KichlerLighting/Kichler](https://www.houzz.com/pro/KichlerLighting/Kichler)
Find us: [pinterest.com/KichlerStyle](https://www.pinterest.com/KichlerStyle)
Watch us: [youtube.com/KichlerLighting](https://www.youtube.com/KichlerLighting)
Find us: [linkedin.com/company/KichlerLighting](https://www.linkedin.com/company/KichlerLighting)

To find an Authorized Dealer, visit [Kichler.com/Where-to-buy](https://www.kichler.com/Where-to-buy)

Kichler Lighting
30455 Solon Rd | Solon, OH 44139

Committed to Your Project Success

PRODUCT TECHNICAL SUPPORT

Have a product or installation question? Our team can provide you with the answers you are looking for. Contact us at 844-KICHLER (844-542-4537) or email techsupport@kichler.com for assistance.

LANDSCAPE LIGHTING, LAYOUT & DESIGN

Need help preparing a layout? Visit [LightProRewards.com](https://www.LightProRewards.com) to learn more.

SYMBOL GUIDE

- D** **Damp Rated:** Used in sheltered areas that are protected from direct contact with rain, snow or excessive moisture.
- W** **Wet Rated:** Suitable for direct contact with rain, snow or excessive moisture (such as fog or ocean spray).
- T20** **Title 20 Compliant**
Our Contractor Series LED MR16 lamps (18210-18221) are Title 20 compliant to meet the energy efficient standards set by the California Energy Commission.
- IP66** **Versatile IP66** rated design provides a dust and water tight housing that can protect against strong jets of water that can occur in coastal areas with strong storms or applications close to sprinklers.
- 24** **Title 24, Part 6:** A regulation that contains the California Building Energy Efficiency Standards as regulated by the California Energy Commission. Products marked with this logo and labeled as JA8-2019 or JA8-2019-E have been found to meet the requirements stated in 2019 T24, Part 6. For more information, visit www.energy.ca.gov/title24.




Federal Communications Commission devices designated with this logo comply with part 15 of the FCC Rules.



Ninety Degree & Walden



Curve & Estella

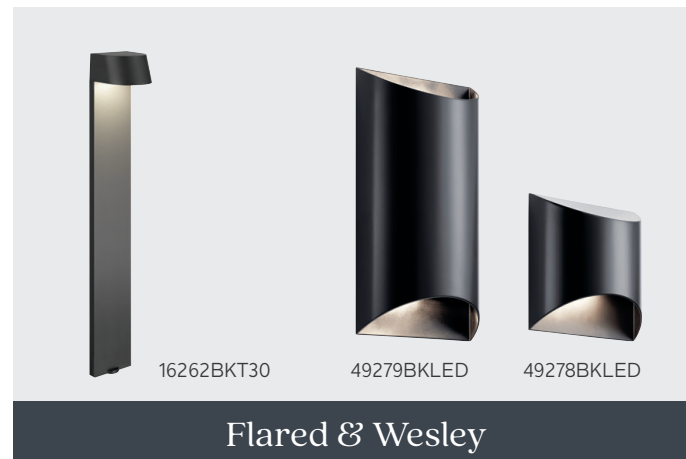

Flared & Wesley



Aimed Bollard & Dahlia



Round Bollard & River Path



Shallow Shade & Nocar & Ryler

