


ASSEMBLY AND INSTALLATION INSTRUCTIONS

T0454

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):

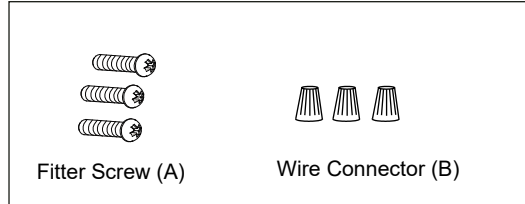

Installation Steps

Turn off the power at fuse or circuit box


1. Install a bulb (not included). See relamping label at socket area or packaging for maximum allowed wattage.
2. Pull out the wires and grounding wire from the post. Make wire connections using the wire connectors (B):
 - The hot wire (usually black insulation) from the fixture to the black wire from the post.
 - The neutral wire (usually white insulation) from the fixture to the white wire from the post.
 - The grounding wire (usually green insulation or bare wire) from the fixture to the grounding wire from the post.Carefully put the wires back into the post.

3. Place the fitter on the top of the post, and then secure it with fitter screws.

NOTE: With silicone caulking compound, caulk completely around where the fitter meets with the post surface to prevent water from seeping into the post.


4. Attach the glass onto the glass holder, secure it with four replacement ball nuts.

Turn on the power at fuse or circuit box

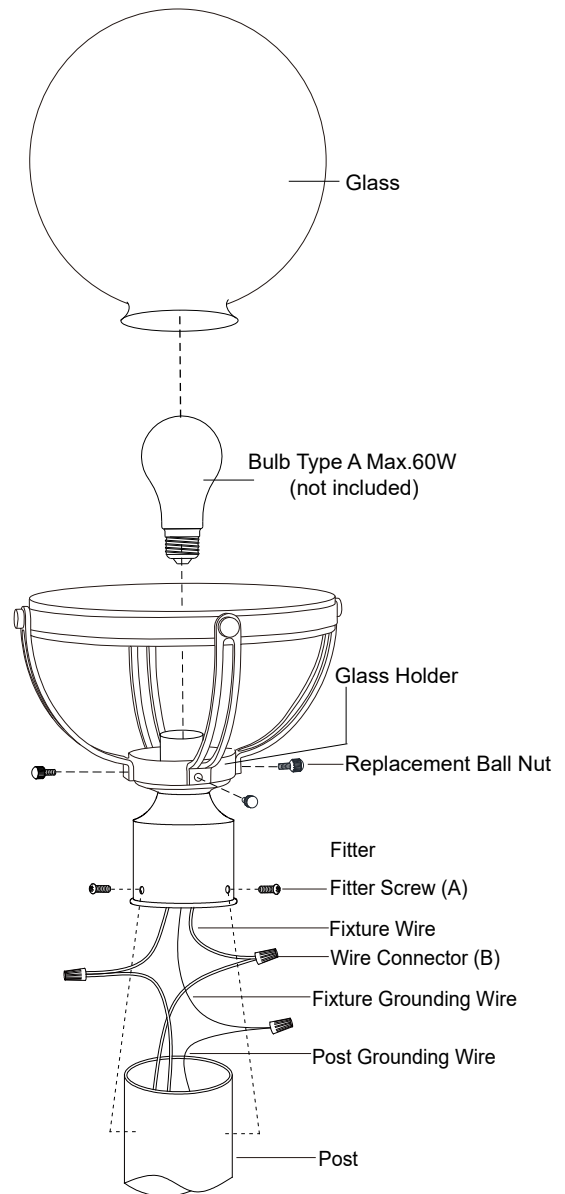


The following parts are available for re-order if damaged or missing.

Spare Parts List:




Fitter Screw (A) Wire Connector (B)

Assembly Kit
6004MM (1SET)



Glass 10037CS

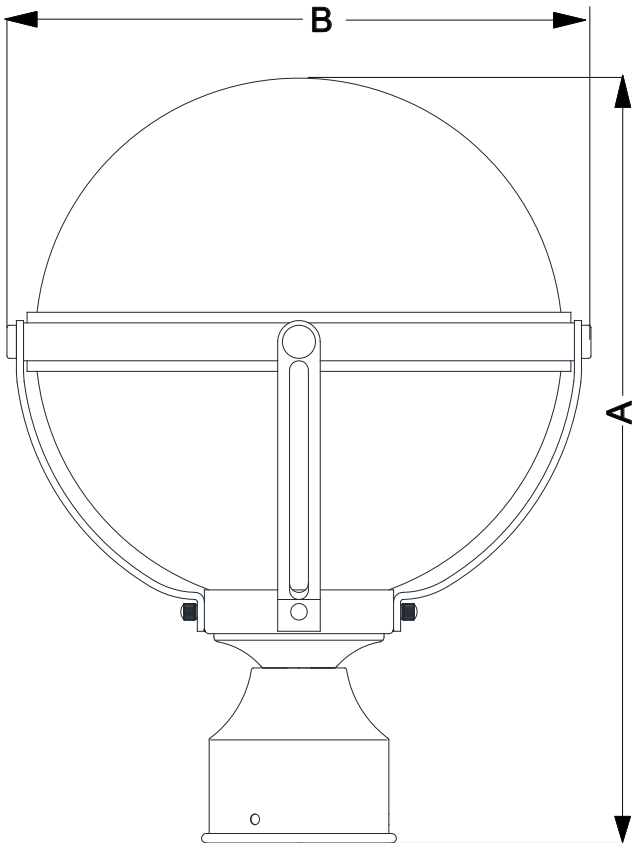

A: 12-3/4"

B: 9-3/4"