

## **ASSEMBLY INSTRUCTION**

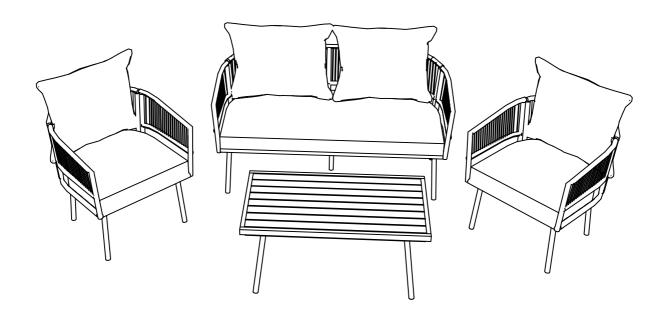


### WF317135 WF317136

#### Notice:


- 1. 50% Tighten before fixing all screws, Allen wrench is recommended instead of an electric drill.
- 2. Place the item on a flat ground to adjust and make sure it remains stable.
- 3. Tighten up all screws with tools gradually.
- 4. If the screws are not aligned with holes during assembly, please loosen all the other screws to 50% and continue the assembly process.
- 5. If the item is not stable, please loosen all the screws, adjust it on a flat ground and tighten up all screws again.
- 6. Note: If one or some screws are fully tightened during assembly, chances are the others will not be aligned with holes. In addition, all the holes are designed to be relatively larger to provide more space for the adjustment of the screws.

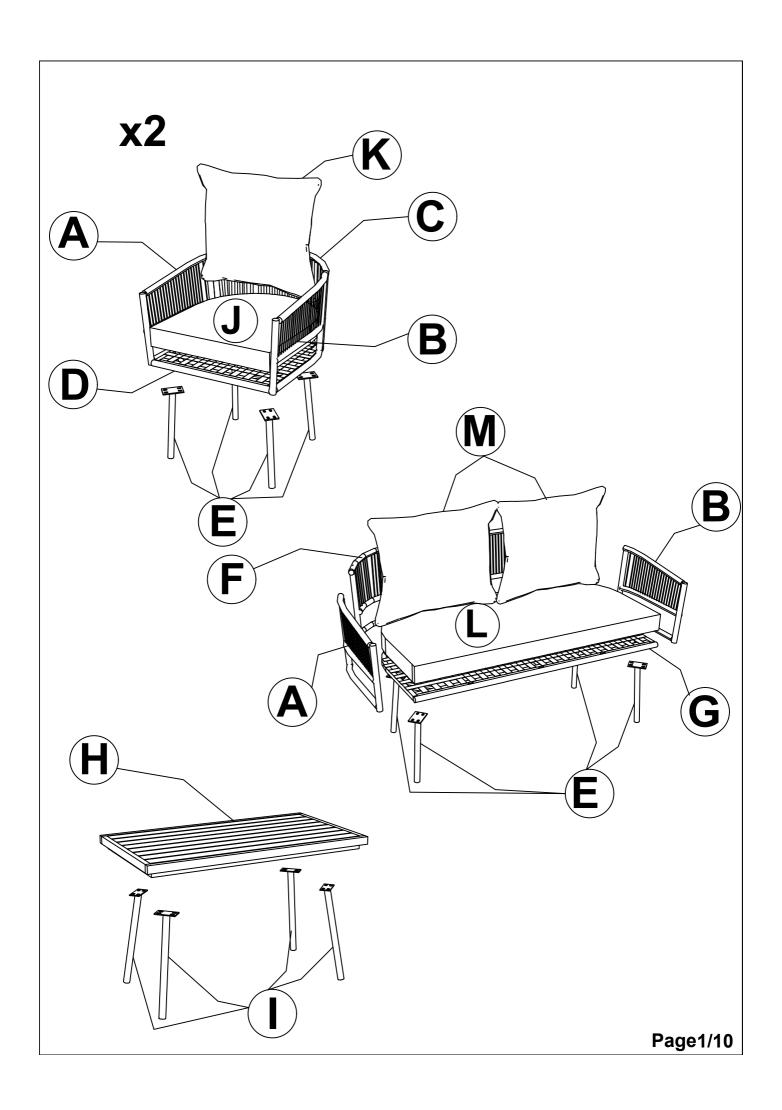


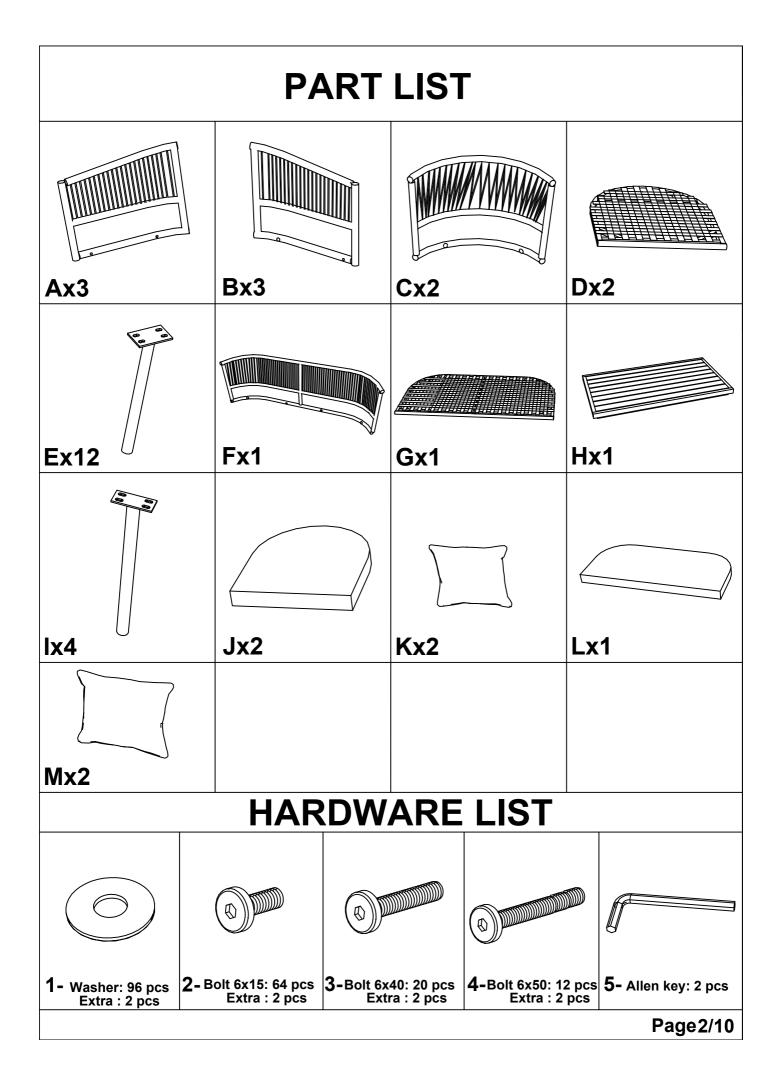



# **CARTON CONTENT:** WF317135: Ax2 Cx2 Bx2 Dx2 Jx2 Kx2 WF317136: Fx1 Bx1 Ax1 **Ex12** lx4 Gx1 **Hardware** Mx2 Lx1


Page 3/10

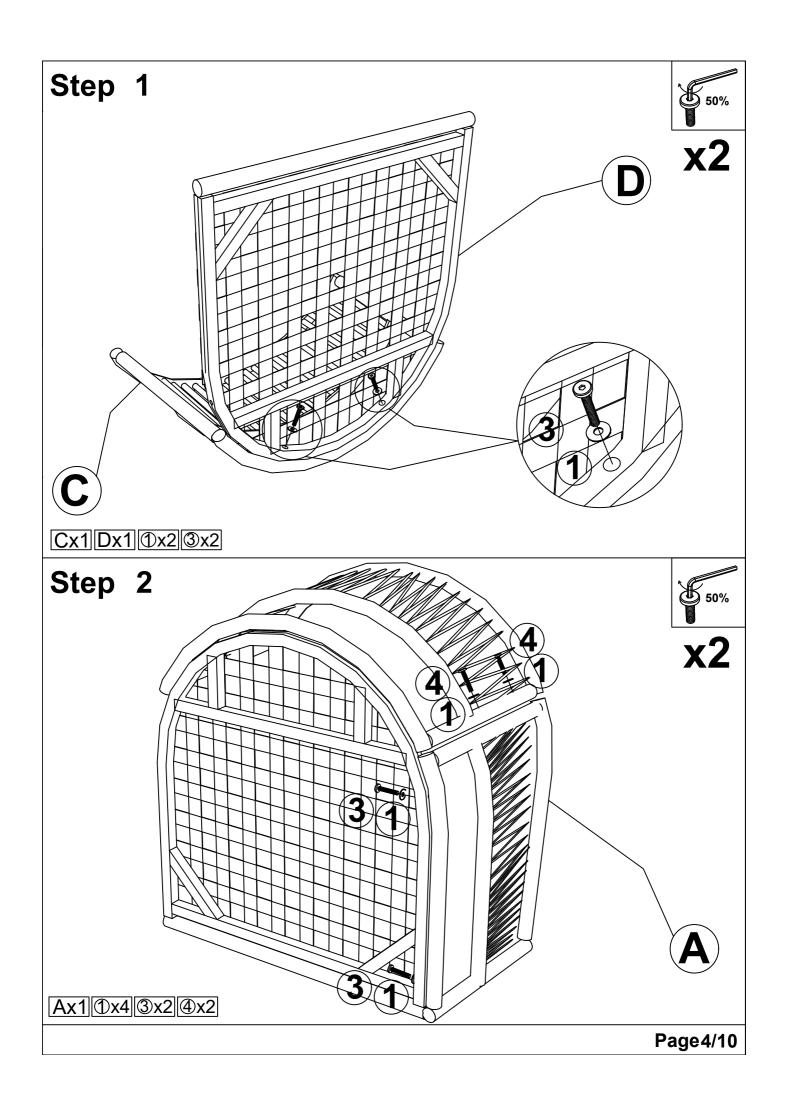


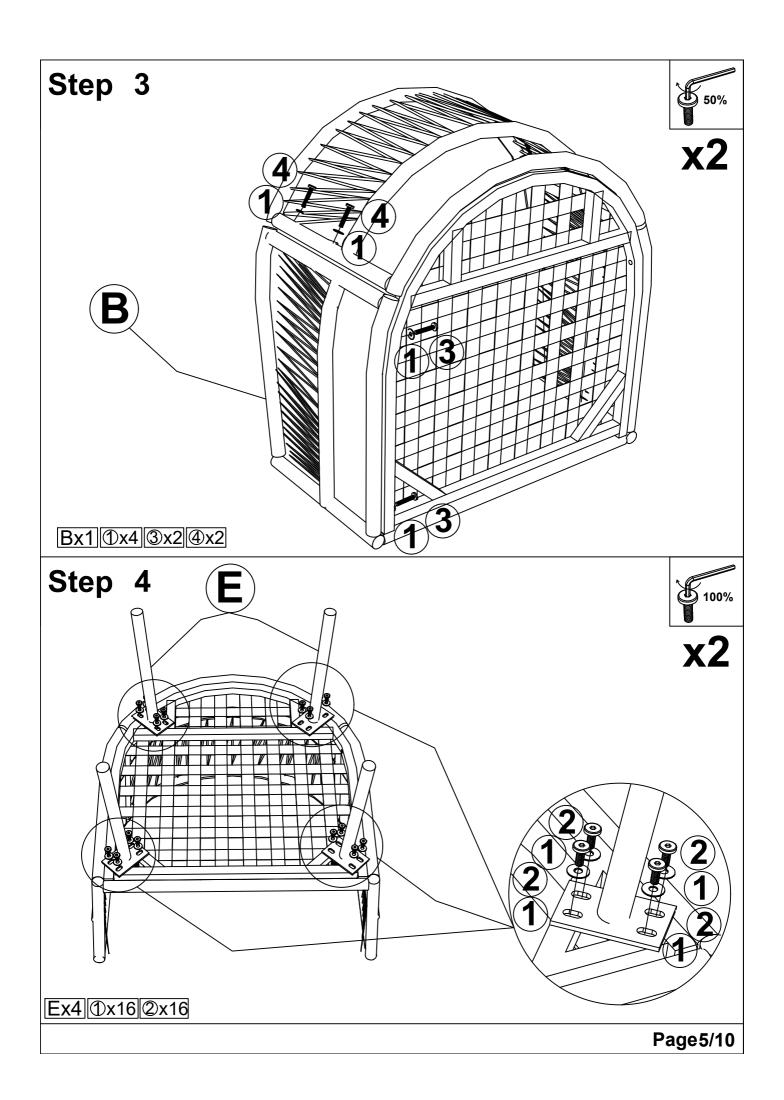


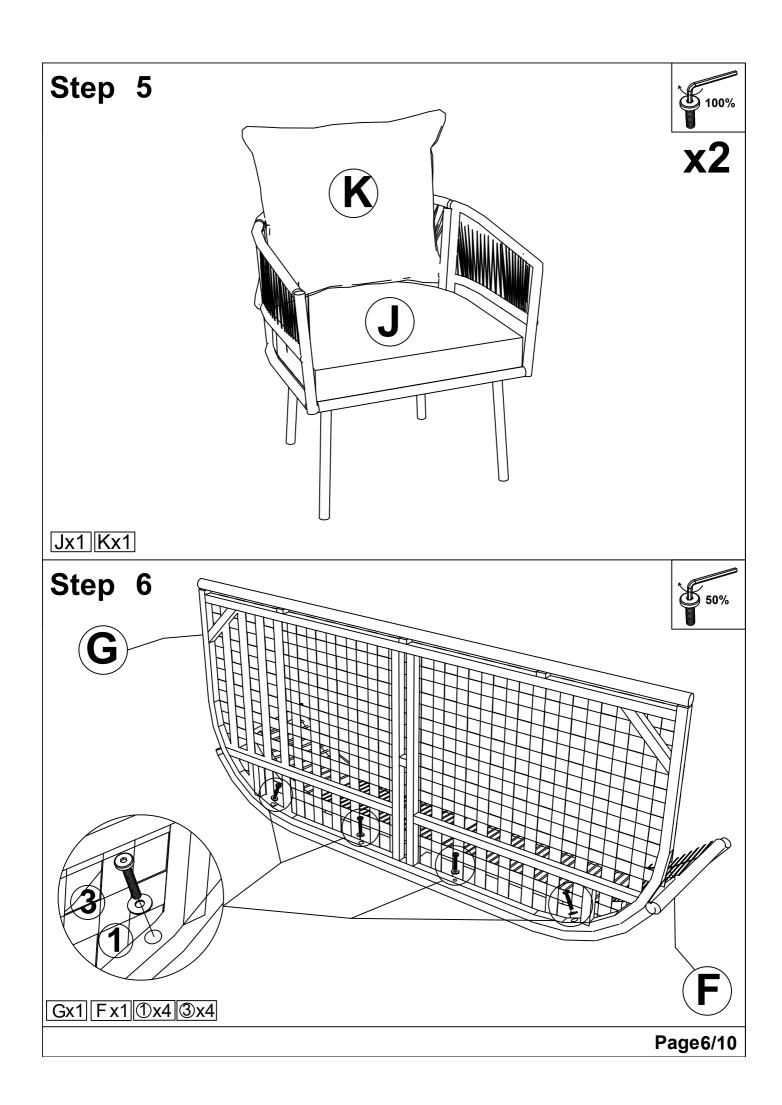


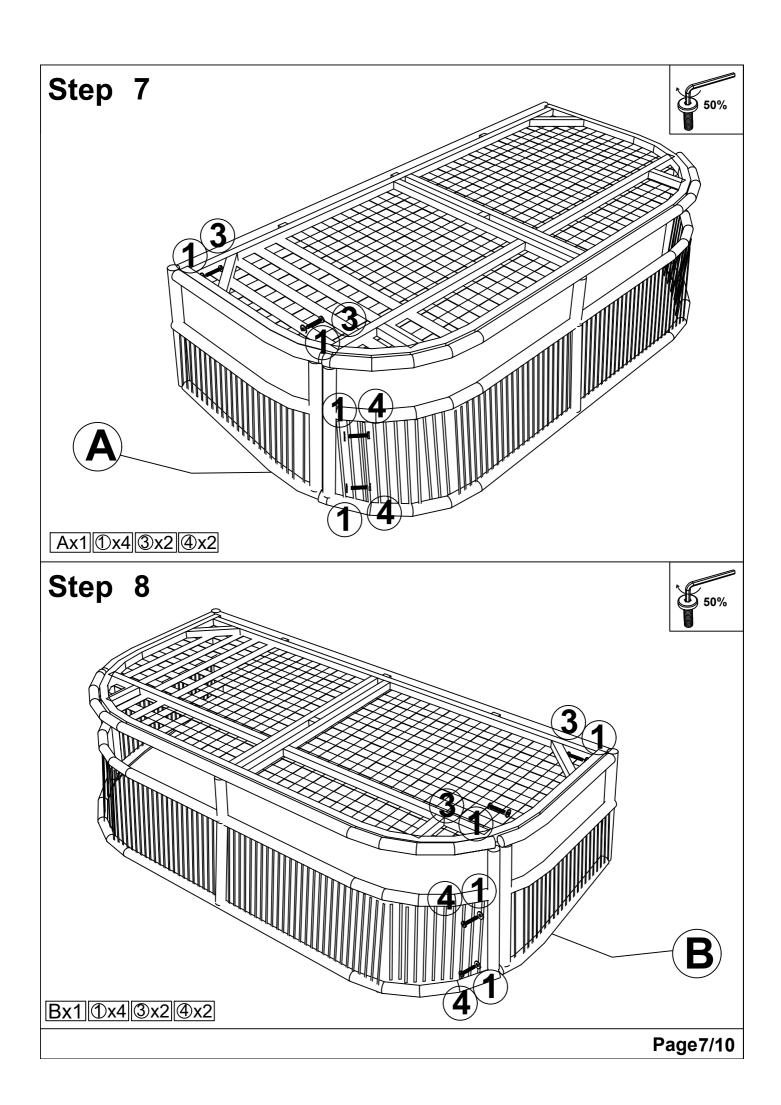

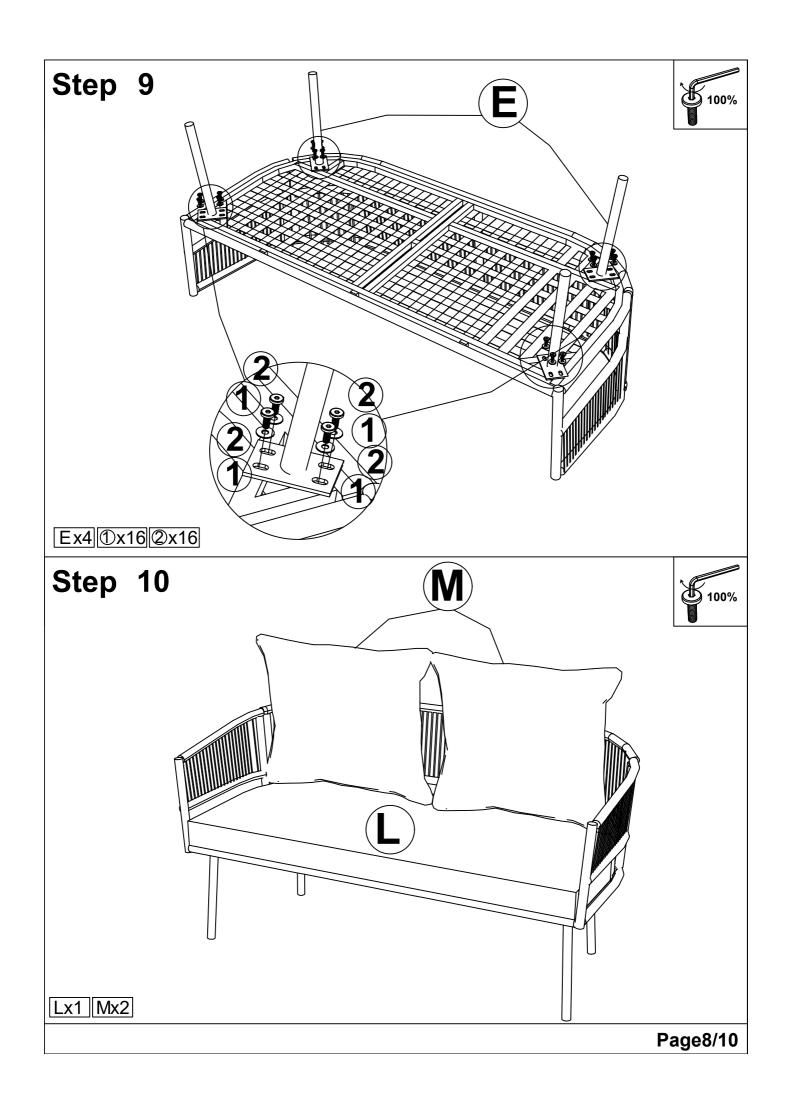

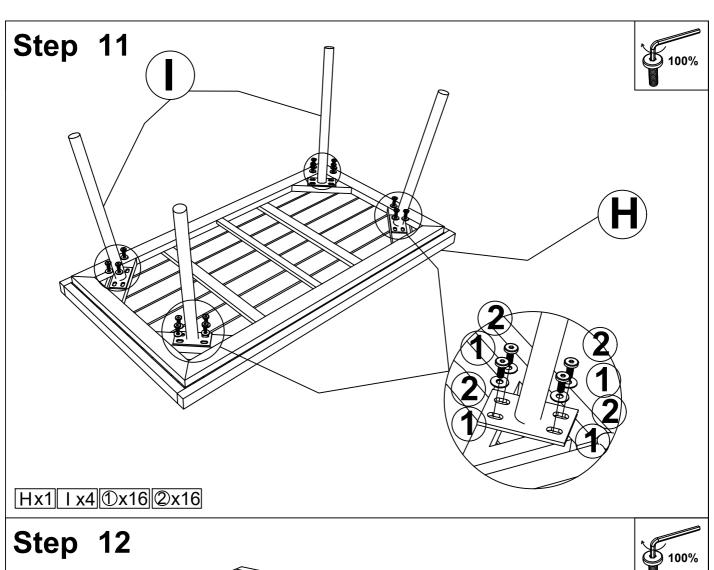

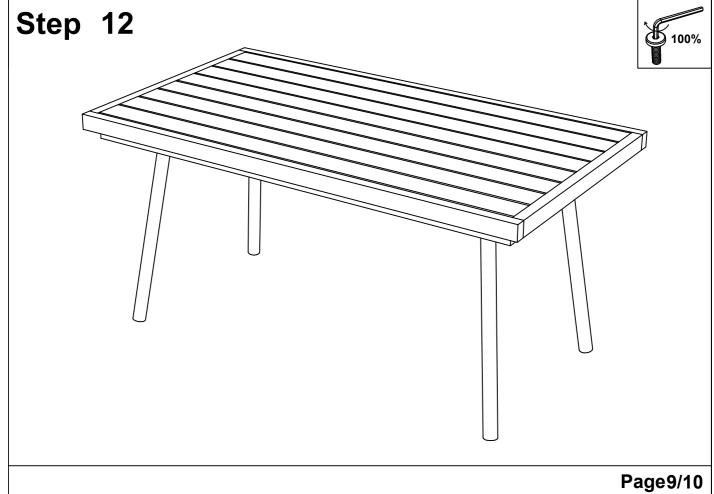

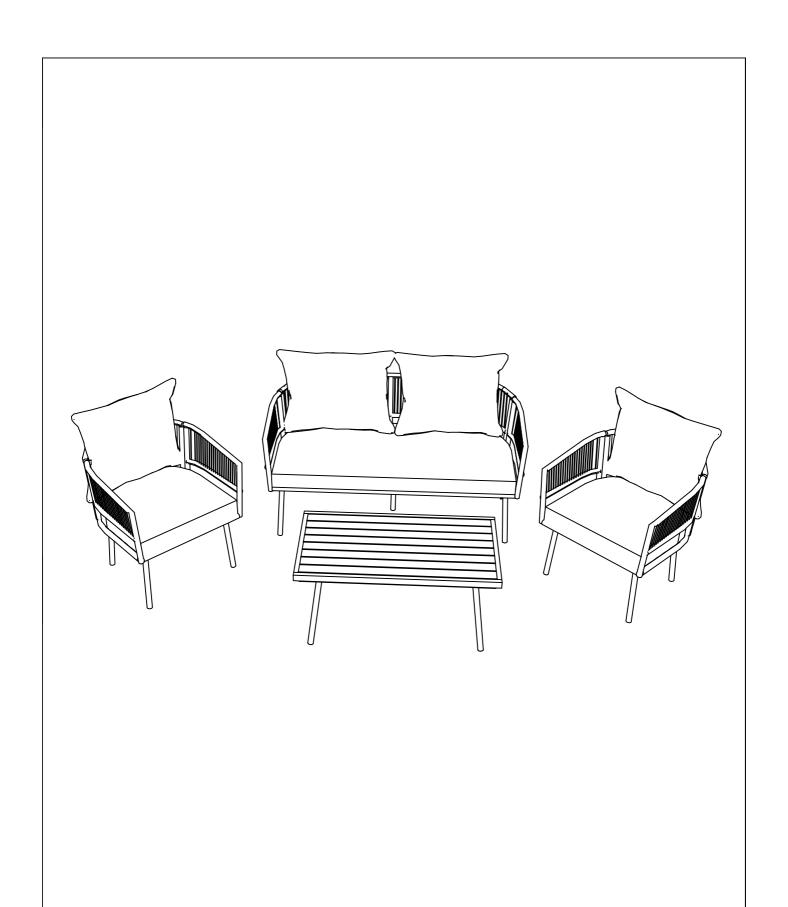

## **Finish**