


AIRSHIELD UV GATE

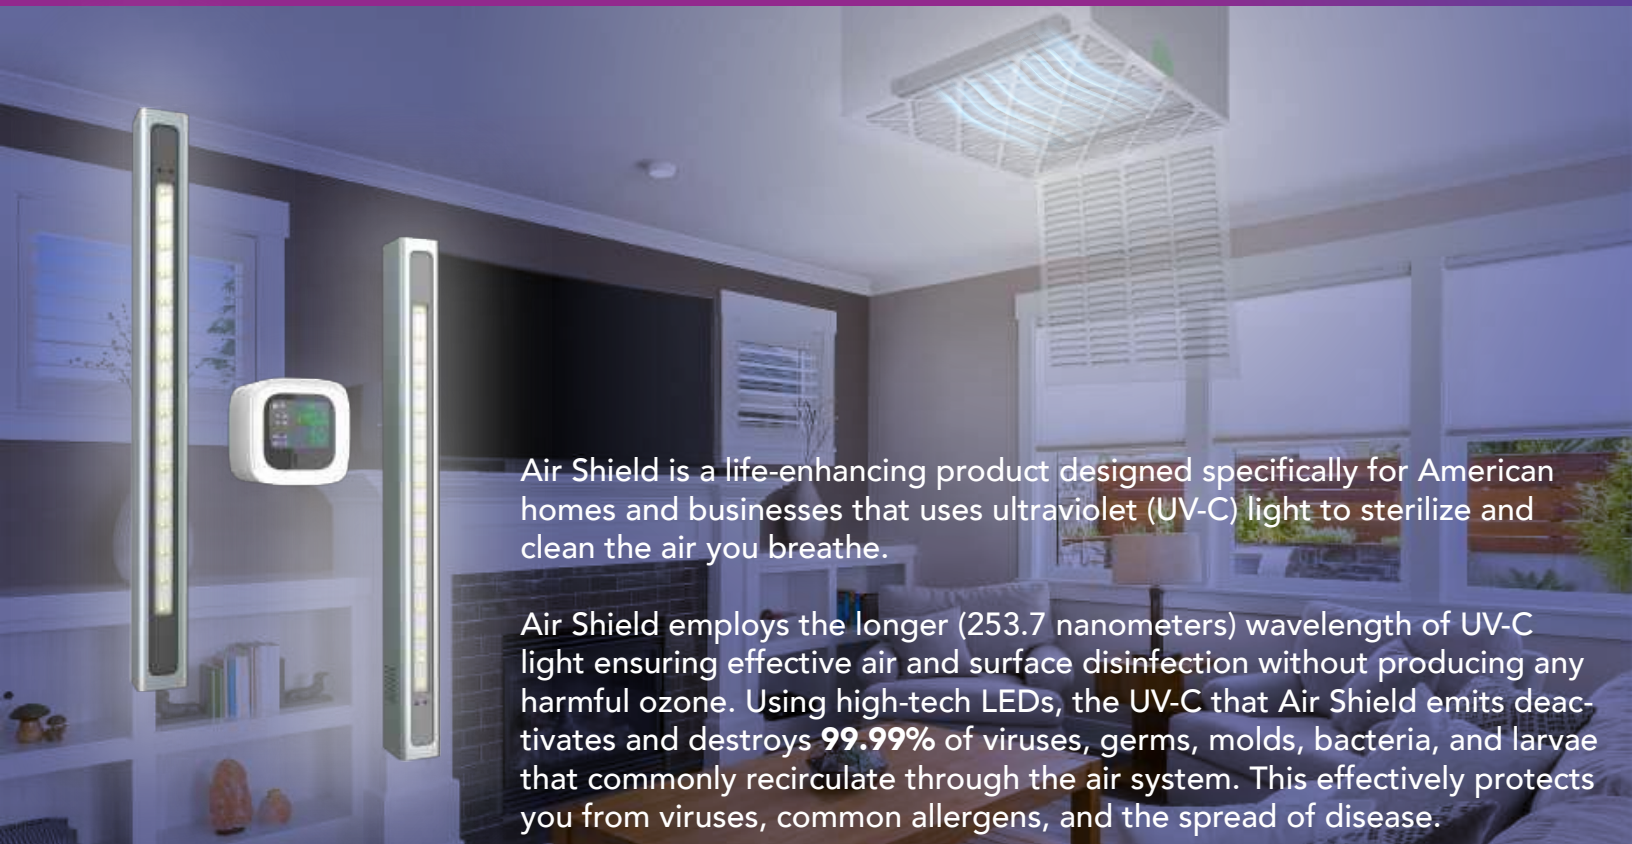

Air Shield is a life-enhancing product designed specifically for American homes and businesses that uses ultraviolet (UV-C) light to sterilize and clean the air you breathe.

Air Shield employs the longer (253.7 nanometers) wavelength of UV-C light ensuring effective air and surface disinfection without producing any harmful ozone. Using high-tech LEDs, the UV-C that Air Shield emits deactivates and destroys **99.99%** of viruses, germs, molds, bacteria, and larvae that commonly recirculate through the air system. This effectively protects you from viruses, common allergens, and the spread of disease.

FEATURES



Real-time
Monitoring



Long-distance
Remote Control



Timer



kills 99.99% of bacteria



PM 2.5 Monitoring



No Secondary Pollution




No Noise



No Ozone



Get the Airshield App for your Android or iOS smartphone for easy control and monitoring.

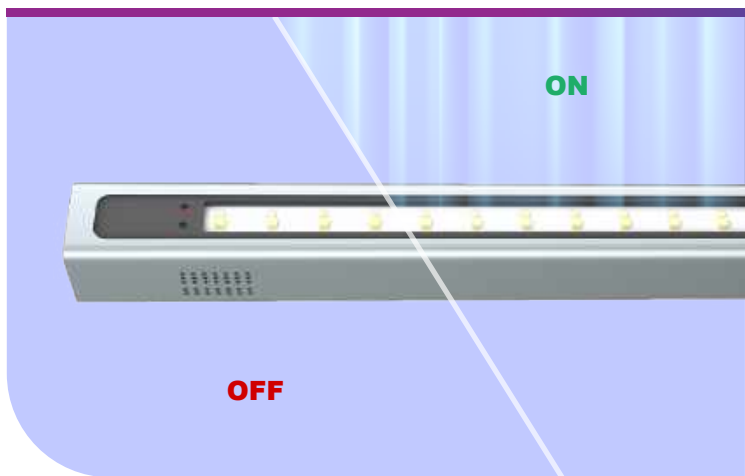

Automatic Shut Off Safety Feature



Three-Year Full Warranty

Full coverage is guaranteed on Air Shield's equipment for three years.



6-month Money-back Guarantee

If you are not satisfied with our product we offer a total refund within six months of your purchase, no questions asked. Installation fees not included in refund.



Free Installation

We provide free installation for our products.



PM 2.5 Air Quality Sensor

How does PM2.5 affect human health?

PM2.5 poses great health risk. PM2.5 (particles less than 2.5 micrometers in diameter) can penetrate deeply into the lung, irritate and corrode the alveolar wall, and consequently impair lung function

Air Shield is easy to install, is designed for current HVAC systems, and can be used in a variety of situations and locations.

For your family, coworkers, or customers, in a workplace, on a cruise-ship or at home, Air Shield provides the peace-of-mind that the air you breathe is safe.



SPECIFICATIONS

TRUSTED BY OVER 1,000 CLIENTS IN THE US

AIRSHIELD



Model	UV Gate
Size	400*35*35MM
Net Weight	~500g
LED UVC Brand	Semicon Light UV3535-X-PA2
Electric Power	17W
UVC Power (W)	10MW/pcs
Working Current	100mA
Working Lifetime	5000Hours
Input	AC110-220V, 50-60HZ
Output	DC 9V, 3A
Power Adaptor	DC 9V, 3A USA Type, UL Certified
Working Temperature	- 20~ +60 Celcius Degree
Device Working Temperature	~55 Celcius Degree after 30 Minutes Do not touch the device while it is working
UVC-LED for Sterlizing	16PCS, 35*35MM, Purple Color
LED indication light	Blue
Rader working diameter	~3-5Meters
Auto Power off time	60 Minutes
UVC Typical Wave Length	280NM
UVC Wave Range	260-280NM
Beam Angle	120°
Working Distance	≤30CM
Dust/ Water Resistant Level	IP5/4
Safety tips for Human Eyes & Skin	Eyes must not see directly to the device Skin must not be exposed directly to the device



SALES LINE: (866)-742-4797



EMAIL: Info@richtechsystem.com