


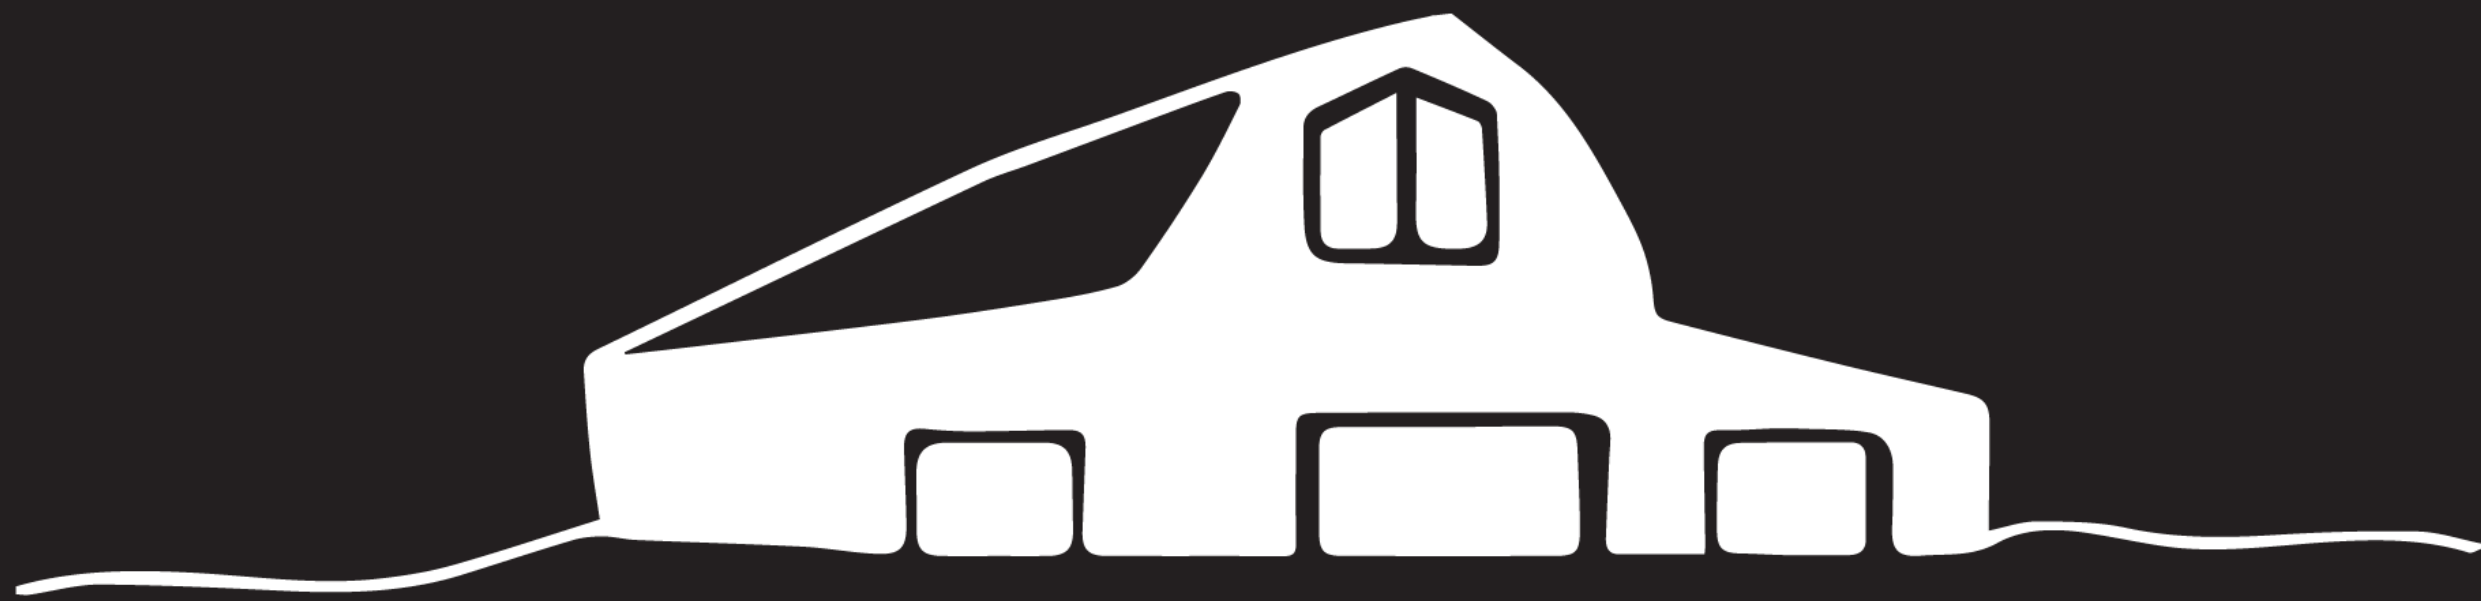

Havelock Wool

High-Performance Wool Insulation

Real wool. Real performance. Real comfort.

PRO BATTS
R14
16 O/C CAVITIES

46.5"	3.5"	15.5"
LENGTH	THICKNESS	WIDTH

9 BATTS PER BAG = 45 SQFT

PRODUCT DESCRIPTION

Havelock Wool PRO batts provide the ultimate solution for high-performance insulation. Wool naturally manages moisture, enhances air quality, regulates temperature, and reduces noise. Upgrade your home for superior comfort and health.

Basic Use: Havelock Wool PRO Batt insulation is used in residential and commercial costruction as a thermal and acoustic insulation. It can be used in open attic areas, enclosed walls, floors and ceilings.


Composition & Materials: Havelock Wool PRO Batts are >90% wool and <10% recycled polyester binder.

INSTALLATION

Installation procedures and techniques must be as recommended by Havelock Wool.



MADE IN THE USA

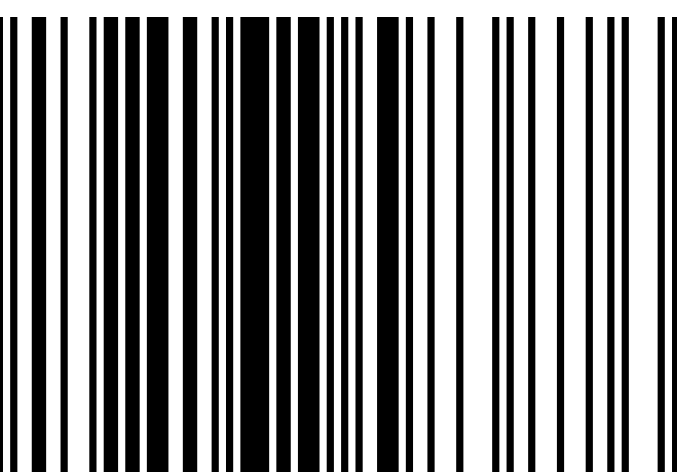

Manufacturer: Havelock Wool
204 Edison Way
Reno, NV 89502
havelockwool.com
+1 775 971 4870

MAINTENENCE

None required.

TECHNICAL DATA

Compliance: California Bureau of Thermal Insulation:
License #T1500 / Registry #CA-T500

PHYSICAL PROPERTIES:

PROPERTY	PERFORMANCE	TEST
Surface Burning	Flame Spread (Class A)	ASTM E-84
Fire Hazard	Smoke Developed (Class A)	ASTM E-84
Thermal Conductivity	Resistance Value (see chart below)	ASTM C-518
Acoustics	Sound Absorption Coefficient	ASTM C-423
Mold Growth	Fungi Resistance of Insulation — PASS	ASTM C-1338
Vapor Permeance	Water Vapor Transmission	ASTM E-96
Hygroscopic Sorption	Hygroscopic Sorption Isotherms	ASTM C1498
Hygrothermal Performance	Building Material Performance	ISO 15148

ABSORPTION COEFFICIENTS:

125	250	500	1000	2000	4000	NRC
0.73	1.01	0.90	0.91	1.01	1.01	0.90