



## FEATURES


- Deep, Ergonomic Bathing Well
- Extended Skirt For Above-Floor Plumbing
- Stepped Integral 3T Flange
- Pre-Leveled Support Base
- Slip Resistant Floor
- Premium Cast Acrylic Surface
- Limited Lifetime Warranty
- High Gloss Durable Acrylic
- Made in USA

## AVAILABLE SYSTEMS

---

### DRIFTBATH ONLY

- Up to 70 water portals
- Quiet, energy-efficient .75 hp pump with integrated heat-transfer
- Electronic control
- 4 high-intensity LED Chromatherapy
- Available in White or Biscuit
- Dozens of low-profile, water only portals for a one of a kind hydrotherapy experience

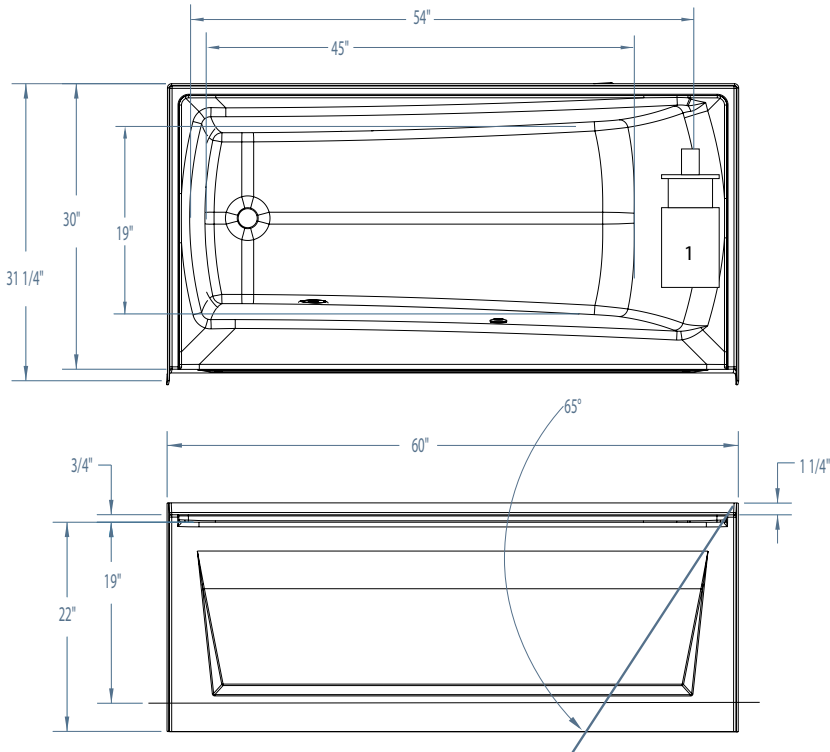

## PARKER 20 6030S

60" x 30" x 22 3/4"

**FEATURES** Dimensional Tolerance  $\pm 3/8"$ . Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.

Type & Model #	Material	System	Powered By	Heater	Controls	Drain	Pkg. Wt. lbs
DriftBath #6030PDBSR/L	Cast Acrylic	Water Circulation	Pump	Integrated	Electronic	LH or RH	161 lbs

### DIMENSIONS

Width	Depth	Height	Skirt Height
60"	31 1/4" - 30"	24 1/4" - 22 3/4"	22"

### SUMP DATA

Capacity to Overflow	Min. Operating Capacity	Top	Bottom	Top	Bottom
55 gal	30 gal	54"	45"	22"	19"

WIDTH @ centerline    DEPTH @ centerline

### PLUMBING DIMENSIONS

A	B	Drain to Overflow	Skirt Height
1 1/2"	8 1/2"	14"	2" - 3 1/4"

### ELECTRICAL DATA

Component	Specification	Requirement
Pump (DriftBath)	3/4 HP; 8.8 AMP; 120V	20 AMP; 120V, separate circuit; Class A GFCI

**Notes:**

16 x 16 minimum access required at pump/blower location(s).