


Model: 81276



BEFORE INSTALLATION

Please make sure the following requirements are met.

- Minimum distance between finished wall and center of the floor drain should be 12".
- 2. Minimum distance between the center of the shut-off valve to the center of the drain should be 8-1/2" (FIG 1).



FEATURES

- Vitreous china
- One-piece decorative toilet
- High efficiency, low consumption (meets EPA WaterSense criteria)
 - Full flush (5.8 LPF/1.5 GPF)
 - Partial flush (3.9 LPF/1.0 GPF)
- Elongated front bowl
- Soft-closing seat with quick-release for easy cleaning
- 16-1/8" rim height
- Chrome plated top mounted push buton actuator
- Fully glazed 2" Trapway
- 12" rough-in
- 100% factory flush tested
- Floor mount

COLOR/FINISH

White

NOMINAL DIMENSIONS

28-3/8" (L) x 16-1/2" (W) x 28" (H)

COMPONENTS

Product includes: One-piece Toilet, Tank Cover, Seat w/soft-closing and quick release, Wax Ring, Floor Mounting Hardware,

COMPLIANCE


- cUPC (ASME A112.19.2-2013/CSA B45.1-13 & ASME A112.19.14-2013)
- EPA WaterSense

WARRANTY

1-Year limited warranty

TEL: (866) 479-8076

DIMENSIONS*

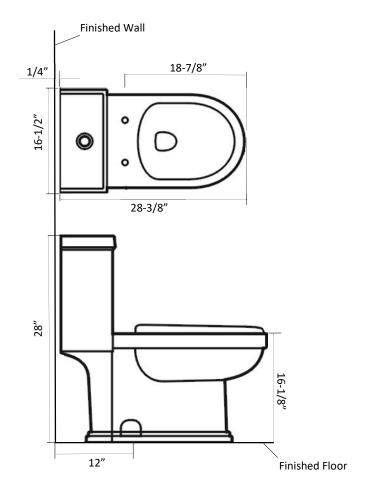

^{*}Dimensions are for reference only. We reserve the right to change any of the specification without prior notice.