

QUIETWALK®

PREMIUM NOISE CANCELING UNDERLAYMENT
& WATER DEFENSIVE BARRIER



100 SQ FT

3' x 33.3' Roll Size - 3mm Thickness

LESS NOISE. MORE COMFORT.
BETTER FLOOR.

Perfect FOR ALL

LAMINATE & FLOATING WOOD!

ENHANCED PERFORMANCE FOR
PAD ATTACHED FLOORING

Customer Reviews:



"...it pays off in a significantly better flooring installation. It's the sort of thing you might not notice at first, but the floor stays warmer and softer [...] it makes a huge difference to our knees over time. The cost to do it is really small (installation is about the same and as long as you are doing a new floor, why not do it great?) and you will be delighted."



"... we wanted to eliminate the potential noise underneath without adding glue. The QuietWalk underlayment was perfect for this project and most of all, it works! We can't even hear walking on them from the basement below. Definitely recommend."



"... It'll provide a nice insulation layer while also protecting from moisture and sound. All things that you might experience when you install a solid surface floor!"



CAN BE USED OVER WOOD
& CONCRETE SUBFLOORS



Water
Protection



Sound
Reduction



Lifetime
Durability



Perfect For Pad
Attached Flooring



Made From
Recycled Materials

Water protection.

QuietWalk uses an advanced water management system to protect flooring from both top and bottom side water!



FEATURING EXCLUSIVE
DRI-WICK
TECHNOLOGY

Water Vapor
Vapor Barrier
Recycled Fiber Pad
with antimicrobial
treated fibers!
Concrete
Subfloor

Watch how!
quietwalk.com/driwick



DRI-WICK TECHNOLOGY
Advanced Water Protection

- DIMENSIONS
3 mm thick x 3 ft wide x 33.3 ft long
- SOUND INSULATION
IIC 71 STC 66 Delta IIC 25
- MOISTURE VAPOR EMISSIONS
5 lbs / 1000 sq ft/ 24 hours
- THERMAL INSULATION
R-Value 0.58
- SMOOTHING
2.5 mm
- COMPRESSION STRENGTH
85.5 PSI

Installation Friendly - Built in Seam Seal!



MPglobal
2500 Old Hadar Road | Norfolk, NE USA



SAFETY & ENVIRONMENT

- Odorless, Zero VOCs
- Antimicrobial Protection
- Approved for use with radiant heat systems
- Made from 94% recycled materials
- LEED compliant



QW100B1LT

AVAILABLE ONLINE & IN SELECT STORES

Vinyl floors?



Specifically designed for
vinyl plank flooring!





Less Work, Less Seams & More Coverage!



QUIETwarmth
Radiant Floor Heating System

QUIETWALK[®]

PREMIUM NOISE CANCELING UNDERLAYMENT
& WATER DEFENSIVE BARRIER

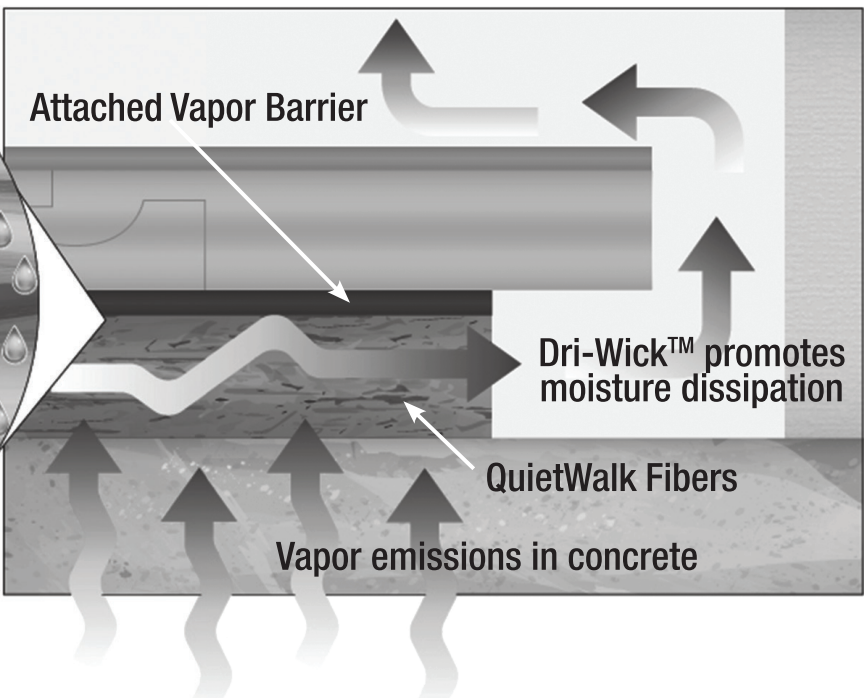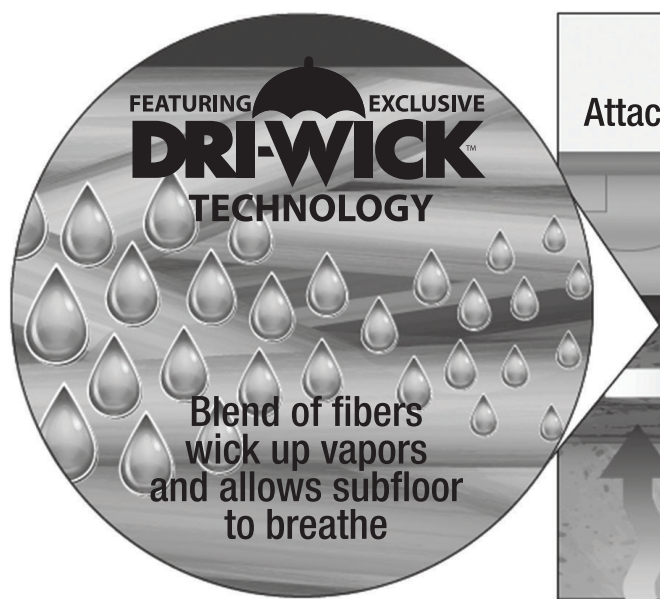

For Use Under

- Laminate Flooring
- Hardwood Flooring

***Enhanced performance for pad attached flooring**



View Installation
Videos and Tips at
QuietWalk.com/install

Delta Δ IIC 25
IIC 71 • STC 66
*for floating engineered wood over 6 inch concrete with suspended ceiling

All wood and concrete subfloors must be flat within 1/8" over a 6' span, or 3/16" over a 10' span. All areas must be checked prior to installation.

Toda la madera y los subsuelos concretos debe ser plana en más de 1/8" a 6" span o 3/16" durante un lapso de 10'. Todas las áreas deben ser verificados antes de la instalación.



EXCELLENT
SOUND
ABSORPTION



EXCLUSIVE
MOISTURE
PROTECTION



SMOOTHING
FLOOR
IMPERFECTIONS



APPROVED
FOR INFLOOR
HEATING



ADDING
INSULATION
VALUE



CLEAN
INDOOR AIR
QUALITY



94%
RECYCLED
MATERIALS

INSTALLATION INSTRUCTIONS

1. Be sure the subfloor surface is clean and dry*.
2. Roll QuietWalk Underlayment over the subfloor with the vapor barrier film (imprinted side) facing up.
3. The perimeter edges of QuietWalk Underlayment need to be 1/2 to 3/4 inches away from the wall.
4. Seams need to be butted together flush, do not overlap the pad. Tape the seams with duct tape, unless the roll is provided with a factory attached lip and tape system.
5. Install laminate flooring according to the manufacturer's installation instructions.

* In geographic areas where concrete slabs are subject to excessive moisture, a calcium chloride moisture test is required. Vapor emission readings in excess of 5 lbs. per 1,000 square feet in 24 hours will require additional protection such as a concrete sealant or polyethylene sheeting.

NOTE: All rolls of QuietWalk Underlayment are cut to a minimum of 100 square feet. The average thickness of QuietWalk Underlayment is .125 of an inch. The average weight of a roll is 12 lbs.

Due to the nature of our manufacturing process and the use of recycled materials, the pad thickness may vary .02 of an inch plus-or-minus. Actual weight of each roll may also vary 1.2 lbs. plus-or-minus. While it may appear that one roll is slightly larger than another, we guarantee this slight variance DOES NOT affect the coverage area nor the sound absorption benefits of the product.

INSTRUCCIONES DE INSTALACIÓN

1. Sea seguro que la superficie del subfloor es limpia y seca *.
2. Ruede QuietWalk Underlayment sobre el subfloor con los revestimientos de la película de la barrera del vapor (cara impresa) para arriba.
3. Los bordes del perímetro de QuietWalk Underlayment de ser 1/2 a 3/4 pulgada lejos de la pared.
4. Las costuras deben ser topado junto a ras, no se solapan con la almohadilla. Tape las costuras con cinta adhesiva, a menos que el rollo se suministra de fábrica con un sistema de cinta de labio y adjunto.
5. Instale el suelo laminado según las instrucciones de instalación del fabricante.


* En áreas geográficas donde están las losas concretas conforme a la humedad excesiva, se requerido una prueba de la humedad del cloruro de calcio. Las lecturas de la emisión del vapor en el exceso de 5 libras por 1.000 pies cuadrados sobre 24 horas requerirá la protección adicional tal como cubrir concreto del sellante o del polietileno.

NOTA: Todos los rollos de QuietWalk Underlayment se cortan a un mínimo de 100 pies cuadrados. El grosor medio del underlayment QuietWalk es .125 de pulgada. El peso promedio de un rollo es de 12 libras.

Debido a la naturaleza de nuestro proceso de fabricación y la utilización de materiales reciclados, el espesor de la pastilla puede variar de .02 de pulgada más o menos. El peso real de cada rodillo también pueden variar de 1,2 libras más o menos. Aunque pueda parecer que un rollo es ligeramente más grande que el otro, garantizamos esta ligera variación no afecta a la cobertura ni la absorción acústica beneficios del producto.

 AVAILABLE ONLINE & IN SELECT STORES

Vinyl floors?
QUIETWALK
VINYL PLANK UNDERLAYMENT
Specifically designed for
vinyl plank flooring!

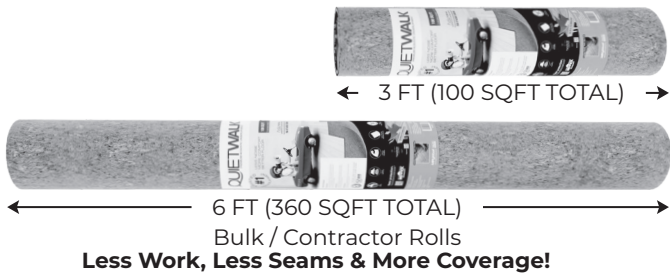

MPglobal

MP Global Products, LLC
P.O. Box 2283 | 2500 Old Hadar Road | Norfolk, NE 68702-2283
402.379.9695 | 888.379.9695 | Fax 402.379.9737
www.quietwalk.com

NALFA
QUALITY CERTIFIED
LAMINATE FLOORING

